

Series HSC

Effective, maintenance-free,
and suitable for any flow-rate
and application



The main strengths of the condensate separators **Series HSC** are effectiveness, reliability, and versatility.

The effectiveness in the removal of condensate is obtained through the particular design of the **DRYVOLUTION** system: thanks to a series of concentric flanges, assembled with a precise angle of incidence with respect to the direction of inlet flow, they generate a compressed air expansion (which takes place inside a chamber downstream of the flanges) that brings about a considerable decrease in the temperature and consequently the condensation of humidity. This is then directed to the bottom of the bowl.

The reliability derives from the fact that no electric power and no chemical

substance is used, and moreover there is no moving part (with the exception of the sole automatic drain): the performance is steady and maintenance is practically zero.

The versatility is guaranteed by the performances and the technical features: the range covers a wide spectrum of flow-rates and the materials used, together with the assembly, make it a very sturdy product. Therefore it perfectly suits many different applications at the end of the compressed air line and close to the point of use: on board of automatic machinery, before pneumatic tools, on board of trucks and agricultural machines, etc..

- Water separation through the decrease in the temperature of compressed air
- No moving part, except for the automatic drain
- Easy to install
- Made in technopolymer and brass OT58
- One size, with 3 possible flow-rate settings
- Maintenance-free
- Neither electricity nor chemical substances required
- Neither sparks nor interferences caused
- Instant operation

SERIES - HSC - T2 - HIGH SEPARATOR CONDENSE
THERMODYNAMIC DRYER



ACCESSORIES
THERMODYNAMIC DRYER





GENERAL FEATURES - HSC - T2

Type of functioning	Thermodynamic
Materials	Technopolymer
Ports	1/2" G (with bushings in brass)
Weight	500 g
Installation	Vertical
Operating temperature	-10°C + 50°C
Condensate drain	Automatic, by float
Medium	Compressed air
Operating pressure	Max. 12 Bar
Max. flow-rate (3 possible settings)	1266* NI/min at max. opening
Factory setting	Intermediate opening (1100 NI/min)

*values at P1= 6 Bar and Delta P= 0.5 Bar.

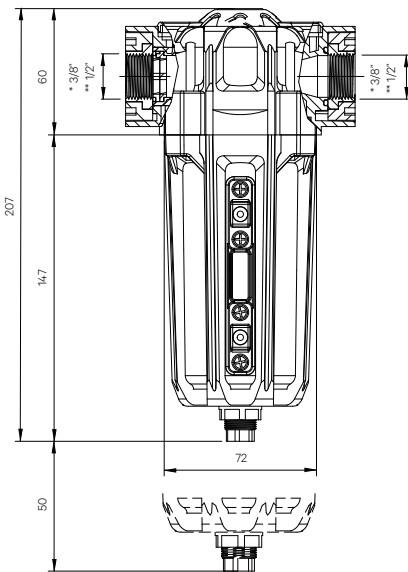


*HSC-02-38-SCC
**HSC-02-12-SCC

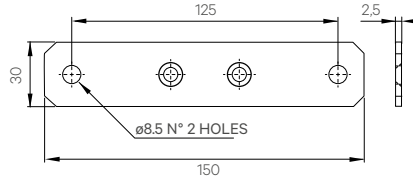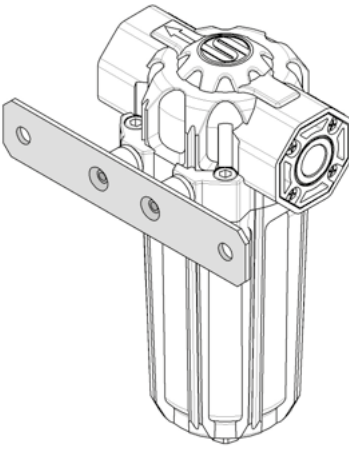

WALL BRACKET

PART-NUMBER	DIMENSIONS
HSC-13	150 x 30 x 2,50

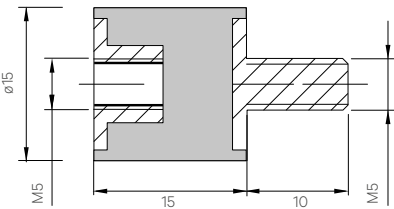

ANTI-VIBRATION SUPPORT

PART-NUMBER	DIMENSIONS
HSC-17	15 x 15 M5