

DEVICES DESIGNED TO RESPOND TO VARIOUS REQUIREMENTS IN THE AUTOMATION FIELD, AS LISTED BELOW:

- **Nozzles series UGP** - In-line blowing
- **Nozzles series UGL** - Cleaning of rectangular photocells
- **Nozzles series UGD** - Cleaning of optical sensors and photocells
- **Nozzles series UGF** - Cleaning of optical fibers
- **Nozzles series UGF** - Cleaning of optical fibers


Possibility of customisation, both in terms of materials and dimensions




UGP 20A



UGP 20B

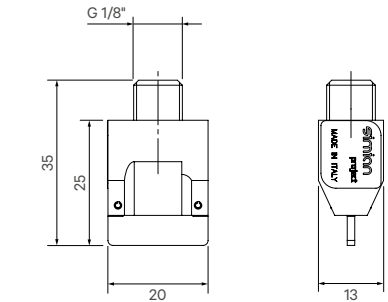

UGP 20A

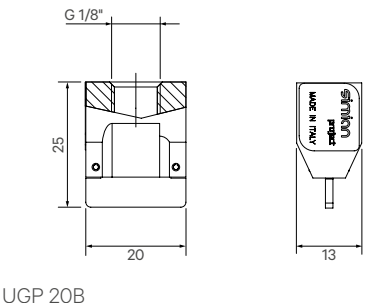

UGP 20B

GENERAL FEATURES - UGP 20A - UGP 20B

Material	Delrin and AISI304 stainless steel
Inlet port	G 1/8" M (UGP 20A) G 1/8" F (UGP 20B)
Flow width	20 mm
Supply pressure	1 ÷ 7 bar
Weight	18 g (UGP 20A) 12 g (UGP 20B)

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE	AIR CONSUMPTION	THRUST*	NOISE LEVEL
bar	NI/min	Grams	dBA
1	95	50	62
2	154	130	67
3	220	200	71
4	286	290	75
5	345	370	78
6	404	460	80
7	460	550	83

*Thrust force (in grams) measured at a distance of 200 mm.

SERIES UGP 45A - UGP 45B

FLAT-FLOW NOZZLES



SERIES UGL



NOZZLE FOR RECTANGULAR PHOTOCELLS




UGP 45A



UGP 45B

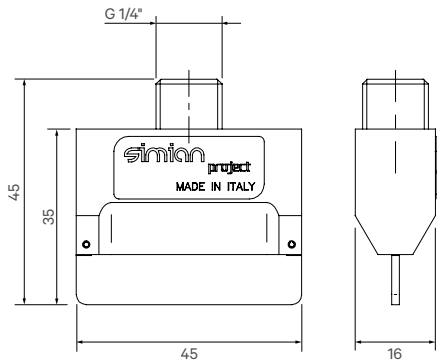

UGP 45A

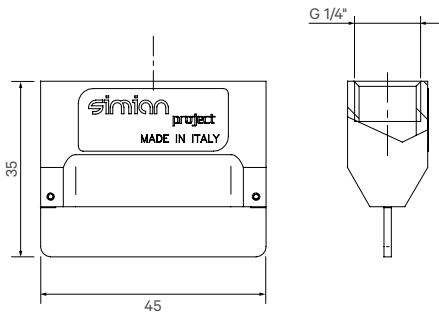

UGP 45B



GENERAL FEATURES - UGP 45A - UGP 45B

Material	Delrin and AISI304 s.s.
Inlet port	G 1/4" M (UGP 45A) G 1/4" F (UGP 45B)
Flow width	45 mm
Supply pressure	1 ÷ 7 bar
Weight	32 g (UGP 45A) 25 g (UGP 45B)

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE	AIR CONSUMPTION	THRUST*	NOISE LEVEL
bar	Nl/min	Grams	dBA
1	130	80	65
2	231	180	70
3	340	290	73
4	436	410	77
5	540	550	80
6	650	700	82
7	780	850	83

*Thrust force (in grams) measured at a distance of 200 mm.

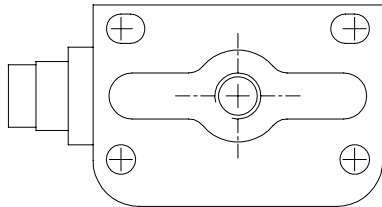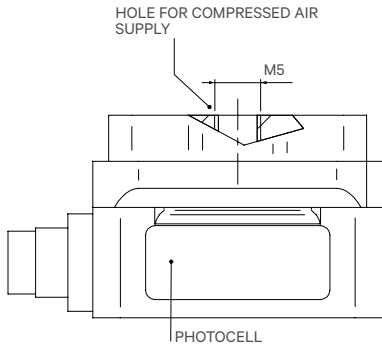

GENERAL FEATURES - UGL

Material	On request
Inlet port	Not included
Dimensions	On request

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE	CONSUMPTION
bar	NL/MIN
0,2	13

SERIES UGD 18-I

NOZZLE FOR CLEANING

SERIES UGD 08 / UGD 12 / UGD 18 / UGD 30

NOZZLE FOR CLEANING



UGD-27 FOR VIDEO-CAMERAS

DIMENSIONS - UGD 18-I				
Material	Moulded Nylon			
Type	A	B	C	
UGD-18I	M18x1	42	26	

DIMENSIONS - UGD 08 / UGD 12 / UGD 18 / UGD 30				
Material	Aluminium			
Type	A	B	C	
UGD-08	M8x1	27	9	
UGD-12	M12x1	32	11,5	
UGD-18	M18x1	38	11,5	
UGD-30	M30x1,5	50	13,5	

Other dimensions on request.

PERFORMANCES AND CONSUMPTION TABLE

PRESSURE bar		CONSUMPTION NI/min
0,2		21
0,3		28
0,4		40
0,5		48

PERFORMANCES AND CONSUMPTION TABLE (ONLY VERSION UGD-18)



PRESSURE bar		CONSUMPTION NI/min
0,2		21
0,3		28
0,4		40
0,5		48

SERIES UGF 03 / UGF 04 / UGF 05 / UGF 06

NOZZLE FOR OPTICAL FIBER CLEANING

SERIES UGB 100 / UGB 300

AIR-KNIFE FOR LIGHT CURTAINS

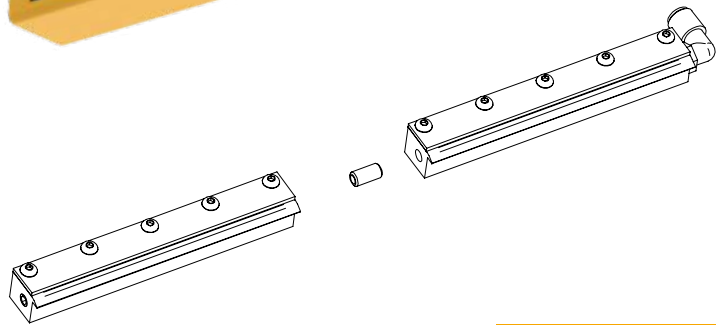
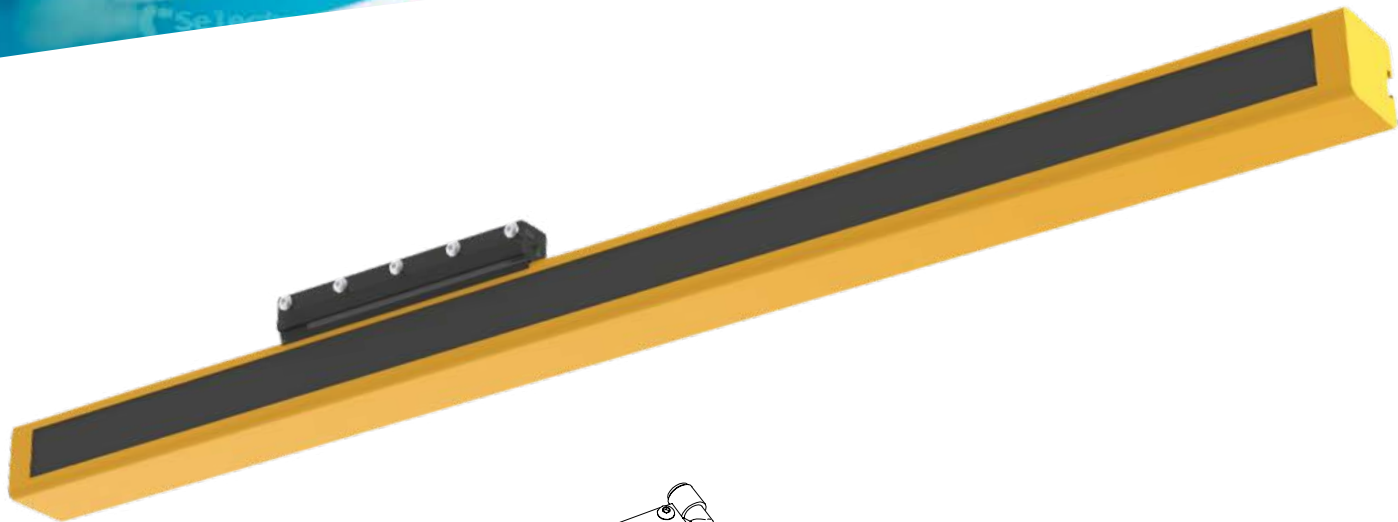


MULTIPLE SOLUTION

GENERAL FEATURES - UGB 100 / UGB 300	
Material	Alluminio anodizzato / Delrin
Inlet fitting	Not included
Curtain width	100 mm / 300 mm

PERFORMANCES AND CONSUMPTION TABLE

Pressione Bar	Consumption L = 300 mm		Consumption x 100 mm	
	m³/h	NI/min	NI/min	
0,3	4	82	27	
0,5	6	114	38	
0,7	8	138	46	
1	10	175	58	
1,5	14	238	79	
2	18	305	102	
2,5	21	358	119	
3	24	408	136	
4	30	508	169	

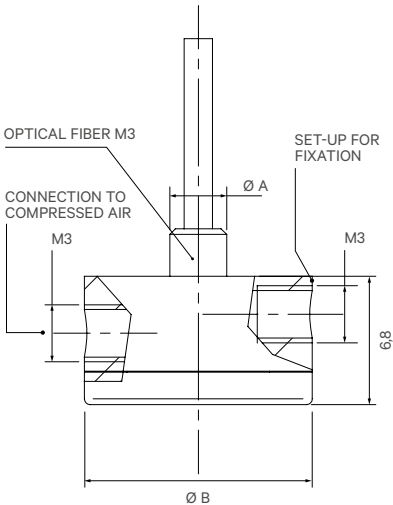

GENERAL FEATURES - UGF 03 / UGF 04 / UGF 05 / UGF 06		
Material	Anodized aluminium	
Inlet fitting	Not included	
Dimensions	Ø A	Ø B
UGF 03	M3	12 mm
UGF 04	M4	15 mm
UGF 05	M5	15 mm
UGF 06	M6	16 mm

