


SERIES VRX-100

HIGH-PERFORMANCE PNEUMATIC COOLERS

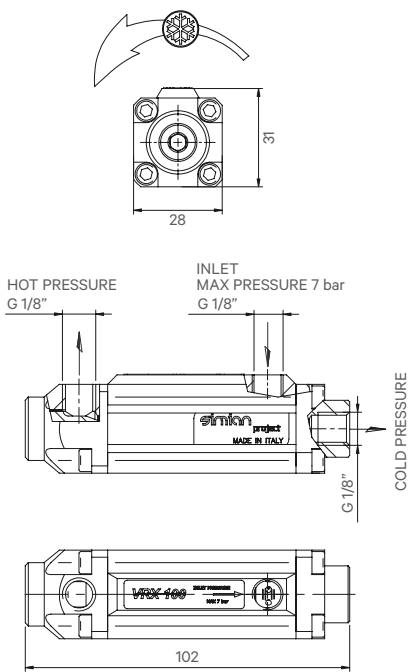

GENERAL FEATURES - VRX-100

Materials	Sleeve: anodized aluminium
	Ends: Nylon 6.6
Air inlet port	G-1/8" F
Outlet port (cold flow)	G-1/8" F
Exhaust port (hot flow)	G-1/8" F
Recommended hose	Ø-8x1
Air supply pressure	1 ÷ 7 bar
Cooling power*	132 W - 110 Kcal/h - 440 BTUH
Optional magnetic support	KACM-VRX-100
Weight	170 g

* With inlet pressure 7 Bar and inlet temperature 20°C.


PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min	Noise level* dBA
1	-2	32	54
2	-12	53	58
3	-18	74	62
4	-23	94	64
5	-26	115	64
6	-28	135	66
7	-31	154	68

*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L = 1 m at hot air outlet.

SERIES VRX-300

HIGH-PERFORMANCE PNEUMATIC COOLERS

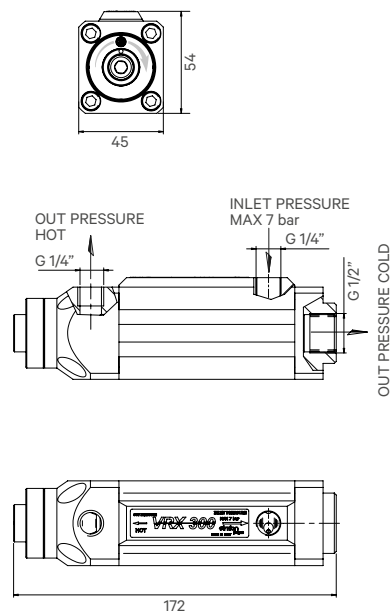

GENERAL FEATURES - VRX-300	
Materials	Sleeve: anodized aluminium Ends: Delrin100
Air inlet port	G-1/4" F
Outlet port (cold flow)	G-1/2" F
Exhaust port (hot flow)	G-1/4" F
Recommended hose	Ø 10x1
Air supply pressure	1 ÷ 7 bar
Cooling power*	600 W - 523 Kcal/h - 2075 BTUH
Optional magnetic support	KACM-VRX500
Weight	740 g

* With inlet pressure 7 Bar and inlet temperature 20°C..


PERFORMANCES AND CONSUMPTION TABLE (with air temperature 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min	Noise level* dBA
1	-3	50	67
2	-7	170	72
3	-10	290	74
4	-13	410	76
5	-16	525	78
6	-17	650	80
7	-19	750	82

*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.

SERIES VRX-500

HIGH-PERFORMANCE PNEUMATIC COOLERS

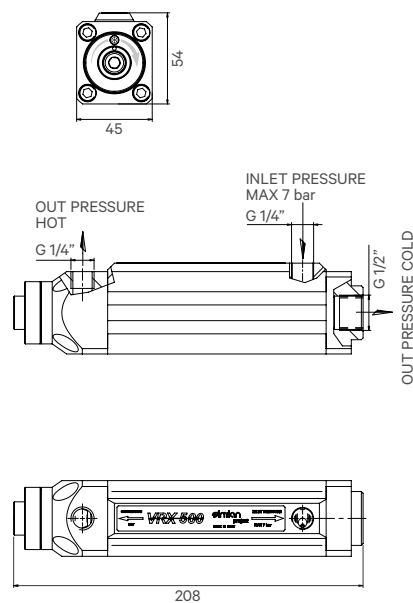

GENERAL FEATURES - VRX-500	
Materials	Sleeve: anodized aluminium Ends: Delrin100
Air inlet port	G-1/4" F
Outlet port (cold flow)	G-1/2" F
Exhaust port (hot flow)	G-1/4" F
Recommended hose	Ø 10x1
Air supply pressure	1 ÷ 7 bar
Cooling power*	730 W - 630 Kcal/h - 2500 BTUH
Optional magnetic support	KACM-VRX500
Weight	860 g

* With inlet pressure 7 Bar and inlet temperature 20°C..


PERFORMANCES AND CONSUMPTION TABLE (with air temperature 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min	Noise level* dBA
1	-3	120	66
2	-7	250	71
3	-10	380	72
4	-13	500	75
5	-16	633	77
6	-17	783	78
7	-19	900	80

*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.

SERIES VRX-1000
HIGH-PERFORMANCE PNEUMATIC COOLERS

ACCESSORIES
PNEUMATIC COOLERS

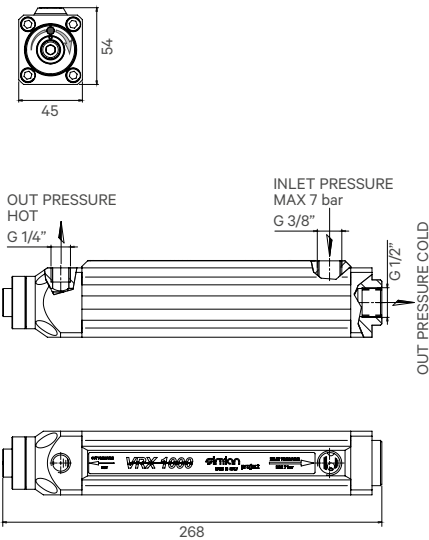

GENERAL FEATURES - VRX-1000

Materials	Sleeve: anodized aluminium Ends: Delrin100
Air inlet port	G-3/8" F
Outlet port (cold flow)	G-1/2" F
Exhaust port (hot flow)	G-1/4" F
Recommended hose	Ø 12x1
Air supply pressure	1 ÷ 7 bar
Cooling power*	1650 W - 1417 Kcal/h - 5600 BTUH
Optional magnetic support	KACM-VRX1000
Weight	1060 g

* With inlet pressure 7 Bar and inlet temperature 20°C..

PERFORMANCES AND CONSUMPTION TABLE (with air temperature at inlet 20°C)

Pressure bar	Outlet temperature cold flow °C	Consumption NL/min	Noise level* dBA
1	-3	230	70
2	-7	500	73
3	-10	800	75
4	-13	1100	77
5	-16	1424	79
6	-17	1760	81
7	-19	2025	83

*Test made with insulated LOC-LINE flexible tube at cold outlet, and tube L= 1 m at hot air outlet.



MAGNETIC SUPPORT

Part-number	Cooler
KACM-VR100	VR100
KACM-VR200	VR200
KACM-VR300	VR300
KACM-VR246	VR200U-G / VR400U-G / VR600U-G
KACM-VRX100	VRX100
KACM-VRX300 / VRX500	VRX300 / VRX500
KACM-VRX1000	VRX1000

ADJUSTABLE NOZZLE (INSULATED VERSION) FOR COLD OUTLET)

Part-number	Port Ø	Nozzle Ø	No. modules	Length mm
AC28	1/8"	3	4	100
AC34	1/4"	3	4	100
AC47	3/8"	6	6	180
AC27	1/2"	6	6	180

ADJUSTABLE NOZZLE (NON-INSULATED VERSION) FOR COLD OUTLET)

Part-number	Port Ø	Nozzle Ø	No. modules	Length mm
82021/8 1/8-3	1/8"	3	8	155
84041/6 1/2-9	1/2"	9	6	170

Other configurations available on request

STRAIGHT PUSH-IN FITTING FOR AIR SUPPLY

Part-number	Hose Ø	Size	Cooler
S6510	8	1/8"	VR-100 / VR-200 / VR-300 / VRX-100
S6510	10	1/4"	VRX-300 / VRX-500
S6510	12	1/4"	VRX-1000
S6510	10	3/8"	VR-600

ELBOW PUSH-IN FITTING FOR AIR SUPPLY

Part-number	Hose Ø	Size	Cooler
S6520	8	1/8"	VR-100 / VR-200 / VR-300 / VRX-100
S6520	10	1/4"	VRX-300 / VRX-500
S6520	12	1/4"	VRX-1000
S6520	10	3/8"	VR-600

SILENCER FOR HOT FLOW EXHAUST

Part-number	Size	Noise at 6 bar dBA
SC 1/8	1/8"	70
SC 1/4	1/4"	67
SC 3/8	3/8"	67

In sintered bronze.

SILENCER FOR COLD FLOW OUTLET (ITEM FOR VRX-300/VRX-500)

Codice	Size
AC25	1/2"

CONTROL UNITS XTRONIC2

1 / 2 / 3 SOLENOID VALVES



CONTROL UNIT XTRONIC2 C EV-1S/C




DESCRIPTION

Control box featuring:


1. Switch for automatic/manual operation
2. Solenoid valve
3. Electronic kit with 7-segment display
4. Temperature probe and safety fuses (high-temperature kit available on request).

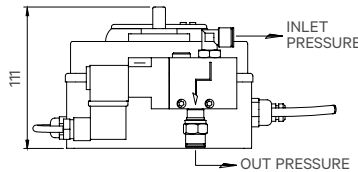

XTRONIC2 C-EV-1S/C
1 SOLENOID VALVE



XTRONIC2 C-2EV-1S/C
2 SOLENOID VALVES

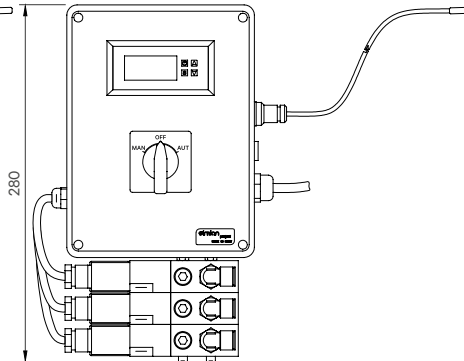

XTRONIC2 C-3EV-1S/C
3 SOLENOID VALVES

GENERAL FEATURES - XTRONIC2 (1/2/3 SOLENOID VALVES)

Supply voltage	220 V AC
Recommended hose	Ø 10x1
Supply pressure	max 7 bar
Probe length	1 m
Application	Outside of cabinets
Weight	
XTRONIC2 C-EV-1S/C (1 solenoid valve)	1300 g
XTRONIC2 C-2EV-1S/C (2 solenoid valves)	1600 g
XTRONIC2 C-3EV-1S/C (3 solenoid valves)	1900 g


CONTROL UNITS XTRONIC 345 B

PNEUMATIC COOLERS



GENERAL FEATURES - XTRONIC 345 B


Supply voltage	24 V DC
Probe length	1 m
Temperature range	-20°C +60°C
Humidity range	00% 100% RH
Accuracy	0.1°C , 0.1 % RH
Current capacity	max 10 A
Coil voltage and power	24 V - 3.1 W
Electric wires' section	0.75 mm
Supply cable length	1.5 m
Application	Inside cabinets

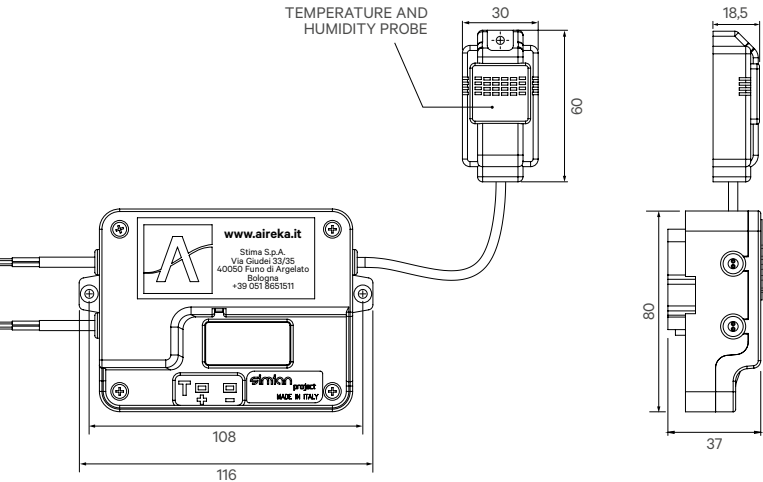



GENERAL FEATURES - XTRONIC 345 T

Supply	24 V DC
Probe length	1 m
Time setting	Weekly / h24
Humidity range	0% - 100% RH
Accuracy	0.1°C , 0.1 % RH
Current capacity	max 10 A
Coil power	24 V - 3.1 W
Electric wires' section	0.75 mm
Application	Inside / outside

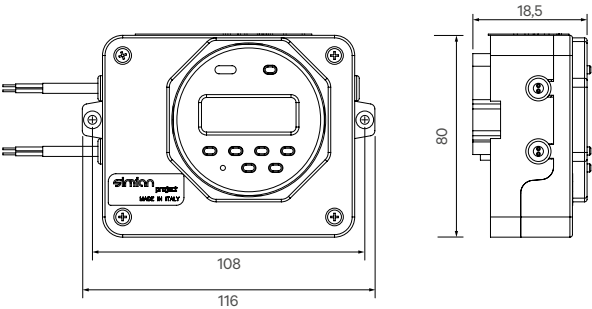

The installation of coolers in control cabinets can be of 3 types:

- EXTERNAL unit**
to have the inner temperature of the cabinet displayed directly;
- INTERNAL unit**
so that to have a compact solution;
- HYBRID systems** where the pneumatic cooler works in combination with an already existing air conditioning unit.

- Hot air
- Cold air

