




Closed Center
SIV233-IP-SC1-CN1-***

Exhaust Center
SIV243-IP-SC1-CN1-***

Pressure Center
SIV253-IP-SC1-CN1-***

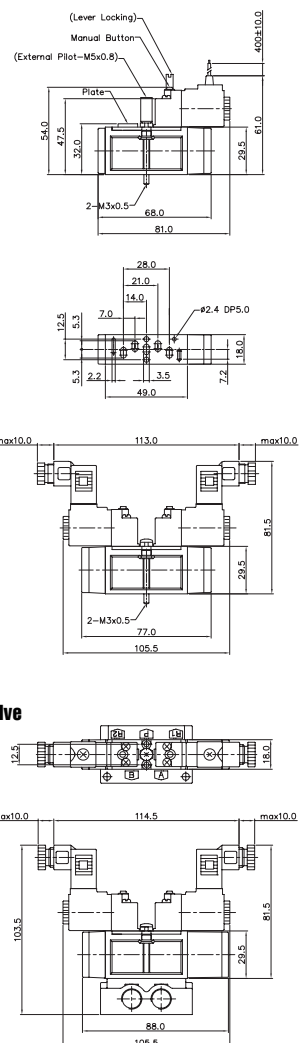


Closed Center
SIP233

Exhaust Center
SIP243


Pressure Center
SIP253

The diagrams show three hydraulic cylinder configurations. Each cylinder has a total length of 315 units. The first diagram, SIP233 Closed Center, shows a cylinder with a central section of length 24 units. The second diagram, SIP243 Exhaust Center, shows a cylinder with a central section of length 24 units. The third diagram, SIP253 Pressure Center, shows a cylinder with a central section of length 24 units.

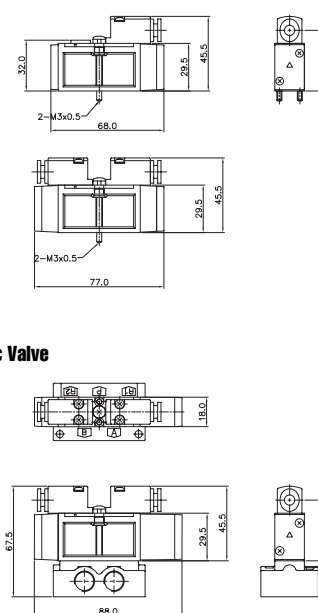


SIB2 1 - S		
Base Series	Port & Thread	Function
SIB2	0 None	S Single Station Sub Base, 1/4 Port Without Pilot Ports
SIV200 Solenoid Valve	1 G	SP Single Station Sub Base, 1/4 Port With Pilot Ports
	2 NPT	DB Single Station Sub Base, 1/8 Port Without Pilot Ports
		DC6 Double Modular Sub Base, ø 6 One-Touch Fitting
		E End Cover, 1/8 Port
		EB End Blanking Cover

(SIV200 Solenoid & Pneumatic Valve Use Sub Base)

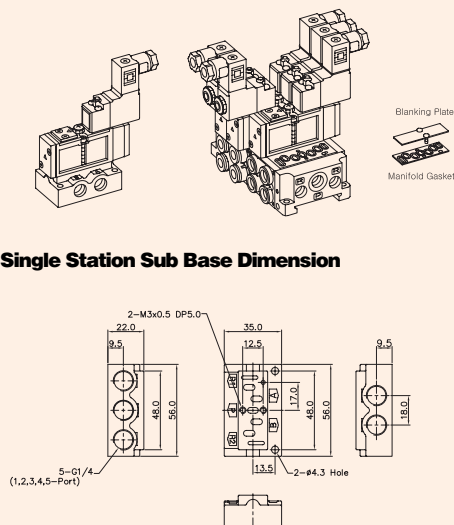

Double Modular Sub Base Dimension

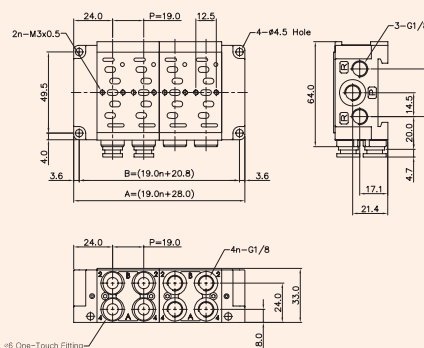

ITEM ⁿ	2	4	6	8	10
B	58.8	96.8	134.8	172.8	210.8
A	66.0	104.0	142.0	180.0	218.0

