


SIV500


ISO-2

Solenoid / Pneumatic Valves



- 5/2, 5/3 ■ 50mm Body Width
- 30mm CNOMO PILOT
- Sub-Base Mounting Type
- Transition Flow 3500ℓ/min (5bar)




SIV511-IP-***





SIP511




SIV511-EP-SC2-CN2-***





SIP520





SIV520-IP-SD2-***



SIP533




SIV533-IP-SC2-CN2-***



** : Voltage Selection (see page 80)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		65.0	50.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		35ms or Less	45ms or Less
Max. Working Frequency		3c/sec	1c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

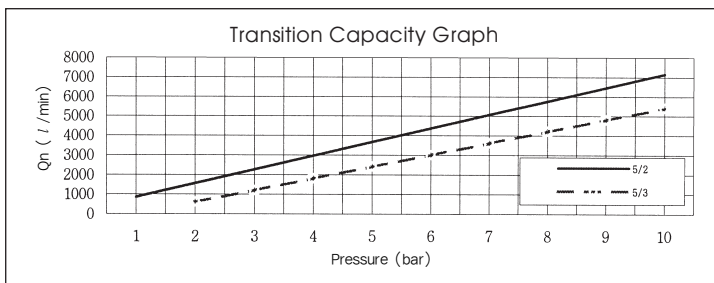

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

SIV5 1 1 - I P - SC2 - CN2 - A2

Valve Series	Function	Return Method	Int/Ext. Pilot		Manual Operator	Solenoid Coil Type		Connector Type	Voltage		
SIV5 : Solenoid Valve	1 5/2 Single	0 None	I	Internal Pilot	0 None	0	None	0	None	0	None
	2 5/2 Double	1 Air + Spring	E	External Pilot	P Push Non-Locking	SC2	3 Pin Connector Coil	CN2	Normal Connector	A2	AC 220V
	3 5/3 Closed Center	2 Air			L Lever Locking	SG2	Grommet/Flying Leads	CD2	Connector With LED	A1	AC 110V
	4 5/3 Open Center	3 Spring				SD2	Grommet/Flying Leads With LED	CZ2	Connector With LED & Surge Suppressor	A4	AC 24V
SIP5 : Pneumatic Valve	5 5/3 Pressure Center									D4	DC 24V
										D2	DC 12V