


SCE300.1/8

"E" ECONOMY Series
Solenoid / Pneumatic Valves

- 5/2, 5/3-1/8, 3/2-M5 ■ 15mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Expense Reduction Type
- Transition Flow 500ℓ/min (5bar)

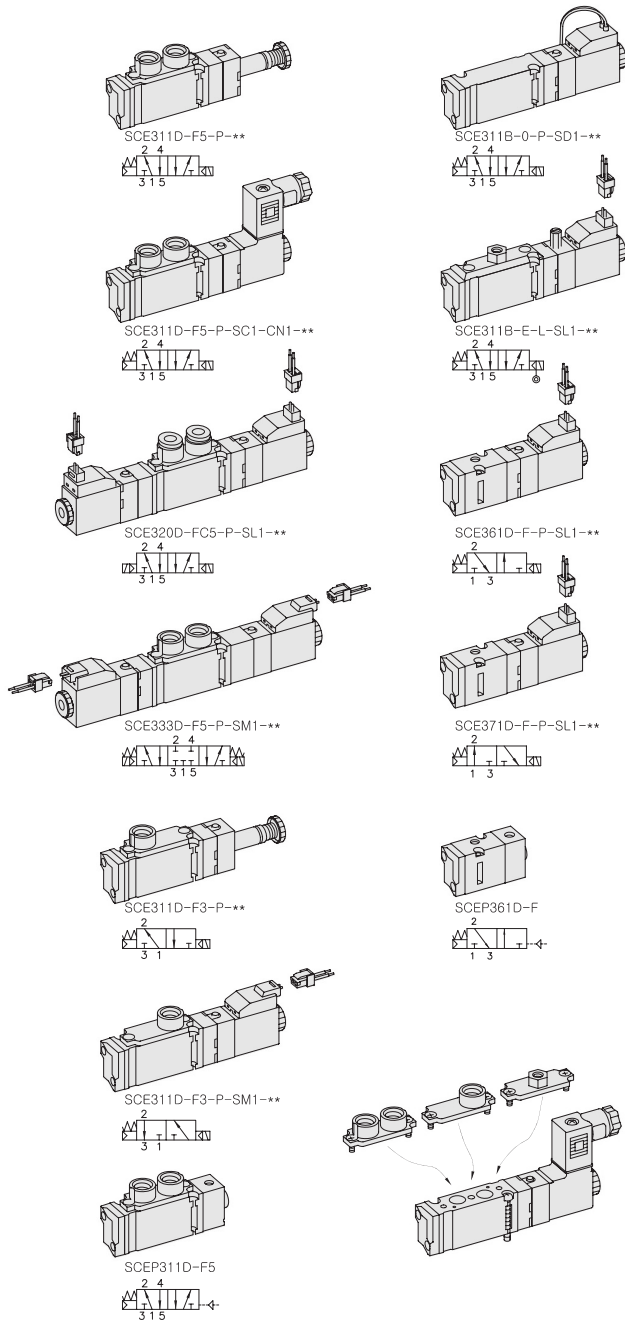


**: Voltage Selection (see page 20)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5, 3Port 2Postion	5Port 3Postion
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		9.5	7.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		8c/sec	5c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:3.5VA(60Hz) / DC:2.5W	


Transition Capacity Graph

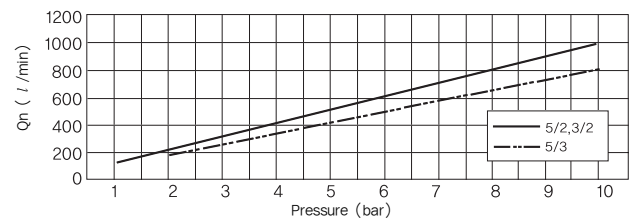

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

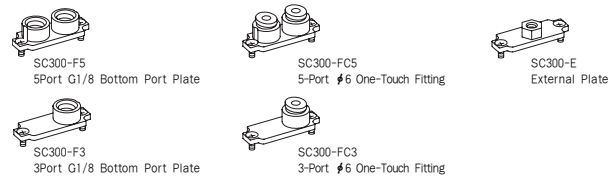

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

SCE3 1 1 D - F5 - P - SC1 - CN1 - D4

Valve Series	Function	Return Method	Port Type	Port Plate & Thread	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SCE3 : Solenoid Valve	1 5/2 Single	0 None	D Manifold	0 None	0 None	0 None	0 None	0 None
	2 5/2 Double	1 Air + Spring	B Sub-Base	F5 5-Port G1/8	P Push	SC1 3 Pin Connector Coil	CN1 Normal Connector	A2 AC 220V
	3 5/3 Closed Center	2 Air		F3 3-Port G1/8	Non-Locking	SG1 Grommet/Flying Leads	CD1 Connector With LED	A1 AC 110V
	4 5/3 Open Center	3 Spring		FN5 5-Port NPT1/8	L Lever Locking	SD1 Grommet/Flying Leads With LED	CZ1 Connector With LED & Surge Suppressor	A4 AC 24V
SCEP3 : Pneumatic Valve	5 5/3 Pressure Center			FN3 3-Port NPT1/8		SL1 90 Degree Plug-in Wire Assembly with LED		D4 DC 24V
	6 3/2 Normally Closed			FC5 5-Port #6 One-Touch Fitting		SM1 180 Degree Plug-in Wire Assembly with LED		D2 DC 12V
	7 3/2 Normally Open			FC3 3-Port #6 One-Touch Fitting				
				E External End Plate, Plate M5×0.8				