


SIE200

"E" ECONOMY Series
Solenoid / Pneumatic Valves


- 5/2, 5/3
- 18mm Body Width
- Sub-Base or Manifold Mounting Type
- Transition Flow 700ℓ/min (5bar)

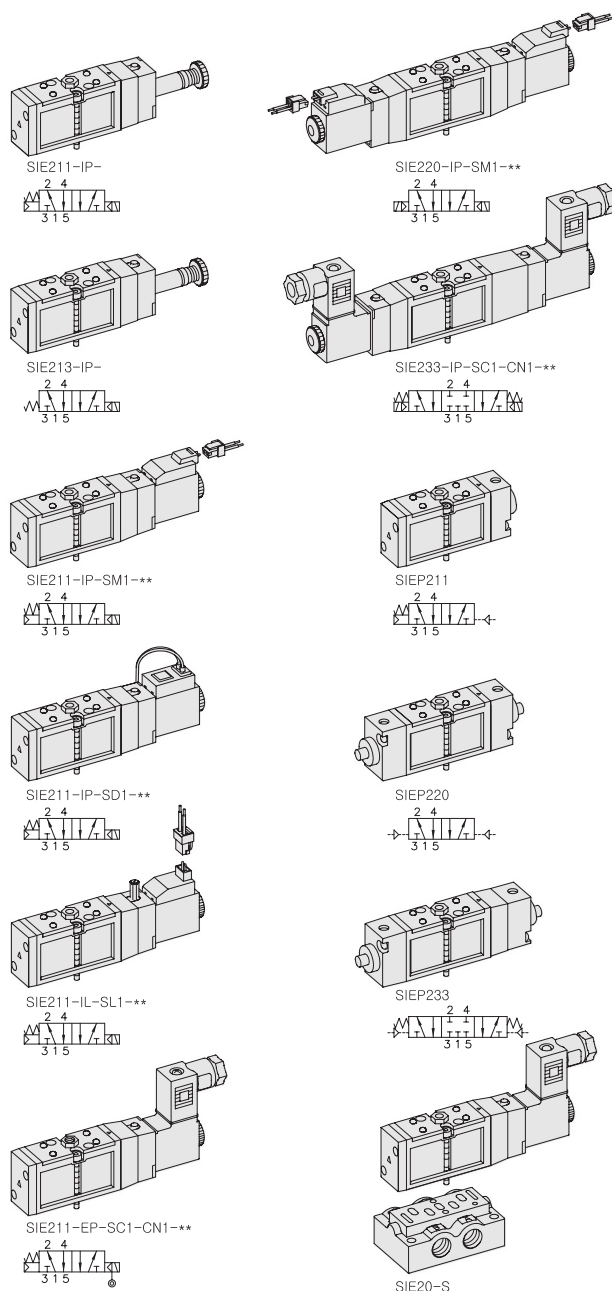

**: Voltage Selection (see page 80)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		12.0	8.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:3.5VA(60Hz) / DC:2.5W	

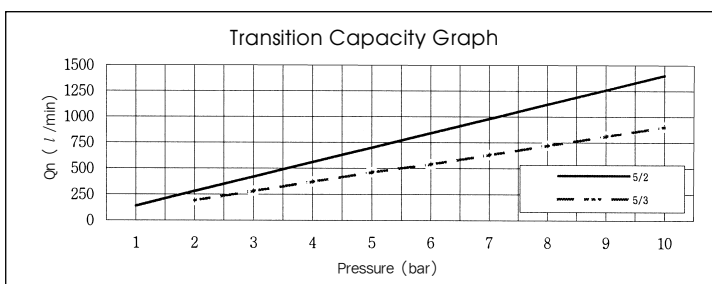

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

SIE2 1 1 - I P - SC1 - CN1 - A2															
Valve Series		Function		Return Method		Int/Ext. Pilot		Manual Operator		Solenoid Coil Type		Connector Type		Voltage	
SIE2 : Solenoid Valve	1	5/2 Single	0	None	I	Internal Pilot	0	None	0	None	0	None	0	None	
	2	5/2 Double	1	Air + Spring	E	External Pilot	P	Push Non-Locking	SC1	3 Pin Connector Coil	CN1	Normal Connector	A2	AC 220V	
	3	5/3 Closed Center	2	Air			L	Lever Locking	SG1	Grommet/Flying Leads	CD1	Connector With LED	A1	AC 110V	
SIEP2 : Pneumatic Valve	4	5/3 Open Center	3	Spring					SD1	Grommet/Flying Leads With LED	CZ1	Connector With LED & Surge Suppressor	A4	AC 24V	
	5	5/3 Pressure Center							SL1	90 Degree Plug-in Wire Assembly With LED			D4	DC 24V	
									SM1	180 Degree Plug-in Wire Assembly With LED			D2	DC 12V	