



Manually & Mechanically Actuated Spool Valves

Port Thread 1/8, 1/4


3/2-Way, Direct Pushrod Operation Thread-1/8




T ₁	Valid Operation Dist	3.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

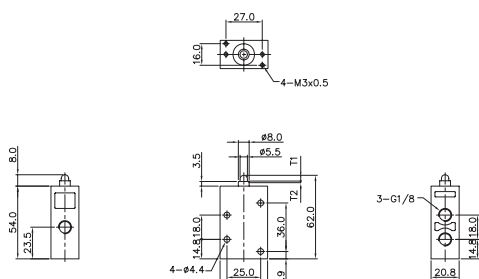


3/2-Way, Direct Pushrod Operation Thread-1/4




T ₁	Valid Operation Dist	3.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

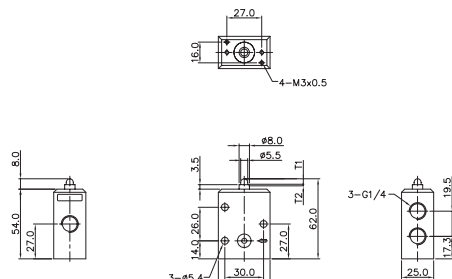

3/2-Way, Direct Roller Lever Operation Thread-1/8




	YM310-1RP	YM310-2RP
T ₁	Valid Operation Dist	8.5mm 9.0mm
T ₂	Invalid Operation Dist	3.0mm 3.5mm
F ₁	Pressure for Valid Operation	2.0kg 2.0kg
F ₂	Pressure for Invalid Operation	

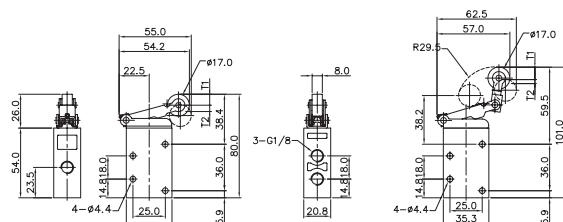

3/2-Way, Direct Roller Lever Operation Thread-1/4



	YM410-1RP	YM410-2RP
T ₁	Valid Operation Dist	8.0mm 9.0mm
T ₂	Invalid Operation Dist	3.0mm 3.5mm
F ₁	Pressure for Valid Operation	2.0kg 2.0kg
F ₂	Pressure for Invalid Operation	

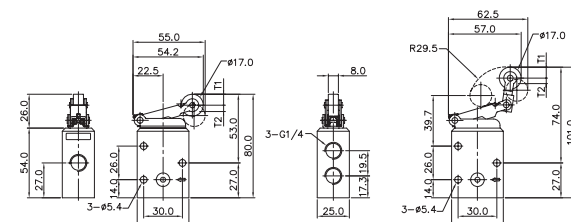

3/2-Way, Direct Pushrod & Selector Operation Thread-1/8

YM310-FP-3



Flush, Push Button

YM310-SL-3



2-Position Selector

YM310-MS-3




Dia Spring Return

YM310-MT-3



Turn to unlock

T ₁	Valid Operation Dist	5.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

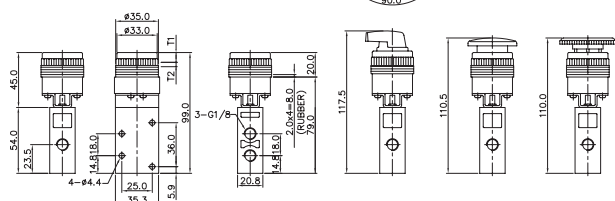

3/2-Way, Direct Pushrod & Selector Operation Thread-1/4

YM410-FP-3



Flush, Push Button

YM410-SL-3



2-Position Selector

YM410-MS-3



Dia Spring Return

YM410-MT-3



Turn to unlock

T ₁	Valid Operation Dist	5.5mm
T ₂	Invalid Operation Dist	1.0mm
F ₁	Pressure for Valid Operation	3.5kg
F ₂	Pressure for Invalid Operation	

