


RLV Series

Roller Lever Mechanically
Actuated Spool Valves


- 5/2, 3/2 - M5, 1/8, 1/4
- Excellent Durability
- Convenient Installation
- Direct Type, Quick Response

SPECIFICATION

ITEM	SERIES	RLV100	RLV200	RLV400
FUNCTION	5/2, 3/2-Way			
Fluids	Compressed Air & Inert Gases			
Port Size		M5	1/8	1/4
Pressure(bar)	0~8.0			
Eff. Sectional Area(mm ²)-5bar		3.5	12.6	19.0
Ambient & Fluid Temp.	5~60°C (41~140°F)			
Lubrication	Not Required(Use ISO VG32 #)			

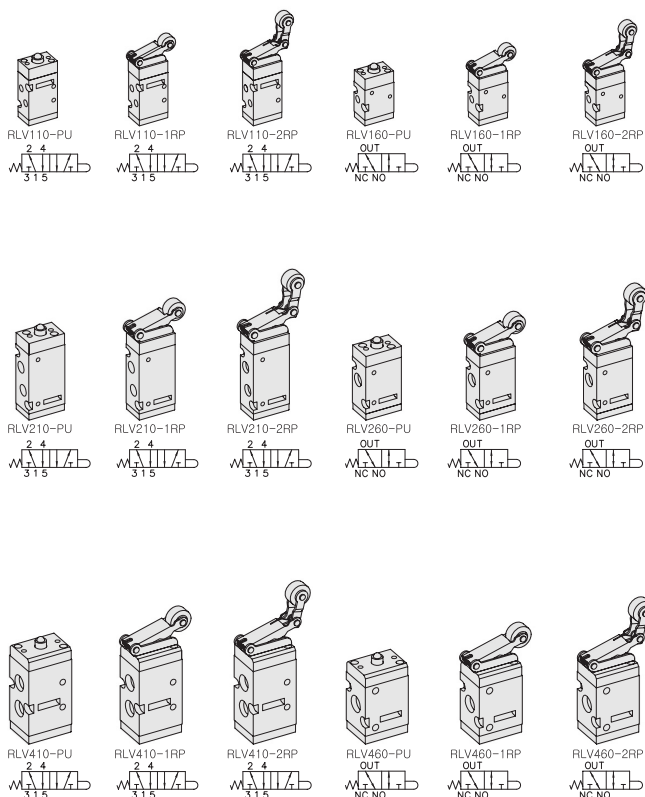

Transition Capacity Graph

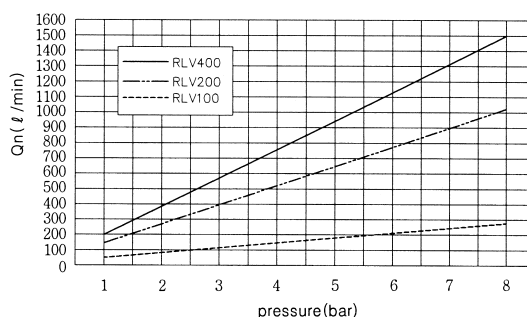

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Lever Parts : Steel Plate, POM
- Spool : Aluminium
- Pilot Parts : Glass Filled Nylon
- Seals : NBR
- Cap : Zinc Pressure Die-Cast
- Spring : Stainless
- Button Parts : Stainless Steel

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

RLV1 1 0 - PU

Valve Series

RLV1 :
M5×0.8-Port Body

RLV2 :
1/8-Port Body

RLV4 :
1/4-Port Body

Function

1	5/2 - Spring Return
6	3/2 - Spring Return

Port Size & Thread

0	G
1	NPT

Operator / Function

PU	Pushrod
1RP	Two-way Roller Plastic Lever
1RB	Two-way Roller Bearing Lever
2RP	One-way Roller Plastic Lever
2RB	One-way Roller Bearing Lever