

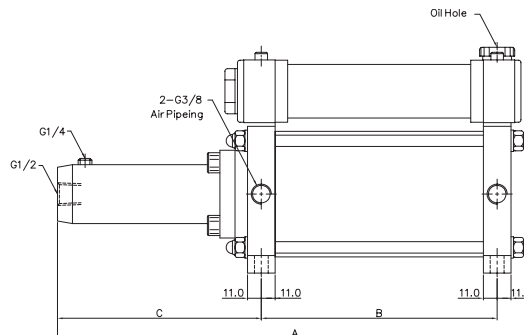


Booster Cylinder



11 : 1, 25 : 1



MODEL NO.	A	B	C	F	G	J	K	L	M
YNBH3-40-70	378	188	162.5	155	130	180	120	60	14
YNBH3-40-100	478	238	212.5						
YNBH3-60-70	378	188	162.5						
YNBH3-60-100	478	238	212.5	225	190	227	137	90	16


Precompressed Type

MODEL NO.	A	B	C	F	G	J	K	L	M
YNPH3-40-70	378	188	162.5	155	130	196	136	60	14
YNPH3-40-100	478	238	212.5						
YNPH3-60-70	378	188	162.5						
YNPH3-60-100	478	238	212.5	225	190	245	156	90	16

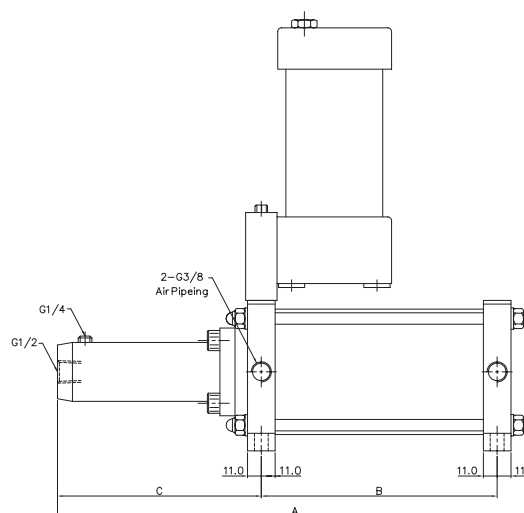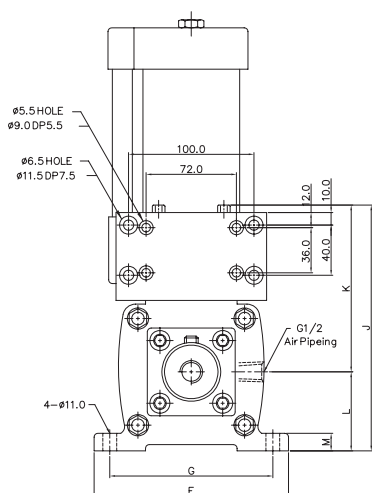


► Ending stroke

After finished work, compressor of oil cylinder has been restored to air pressure by converting valve, and all the stroke is returned original state, then is prepared to travel stroke.

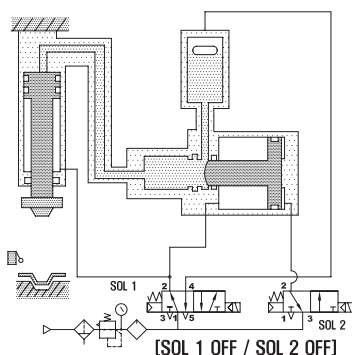

► Precompressed Travelling stroke

By using compressor, high compressed oil should be travelled to the hydraulic to get output.

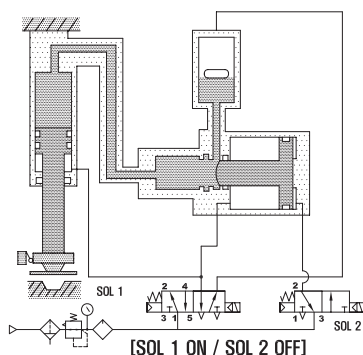

► Travelling stroke

By using common converter it has been changed from "low-compressed air pressure" to "oil pressure" at the time of 1:1 pressure.

