
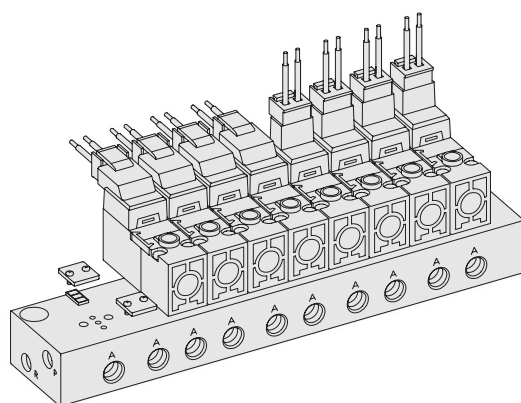


YSV10

Direct Actuated
10mm Pico Solenoid Valves

- 3/2- Direct Operation Type
- Manifold Mounting Type
- Orifice $\varnothing 0.6\text{mm}$

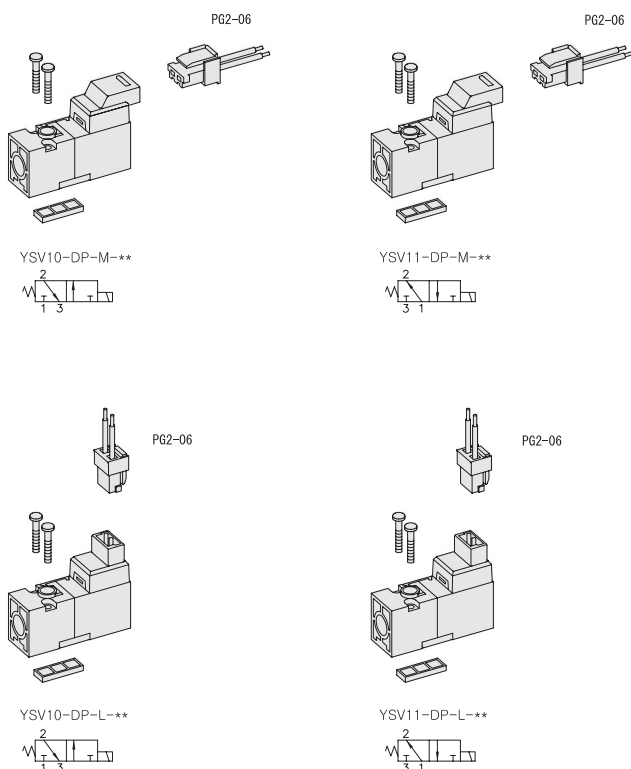


** : Voltage Selection

SPECIFICATION

SERIES	YSV10	YSV11
ITEM / FUNCTION	3/2-N.C	3/2-N.O
Fluids	Compressed Air & Inert Gases	
Pressure(bar)	1~8.0	
Orifice(mm)	P = $\varnothing 0.6$, R = $\varnothing 0.7$	
Ambient & Fluid Temp.	5~60°C (41~140°F)	
Response Time(5bar)	10ms or Less	
Max. Working Frequency	30c/sec	
Lubrication	Not Required(Use ISO VG32 #)	
Manual Override	Push Button	
Coil Insulation Class	F-Class or Equivalent	
Permissible Voltage Variation	±10% of Rated Voltage	
Off Min. Residual Voltage	10% of Rated Voltage	
Power Consumption	0.65W(24V : 27.0mA / 12V : 54.0mA)	


Transition Capacity Graph

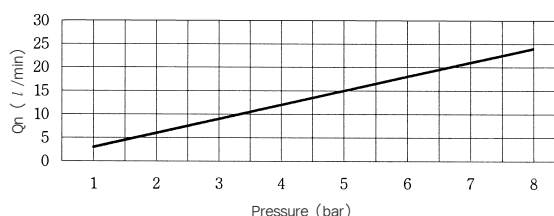

The Material of Parts

- Pilot Parts : Glass Filled Nylon
- Spring : Stainless
- Seals : NBR
- Armature : Stainless Steel
- Indicator Cap : Polycarbonate

Plug Connector With Clip



Ordering Code
PG2-06 (L : 600mm)
PG2-10 (L : 1,000mm)

Blanking Plate (Material : STS304)




Ordering Code
YMF10 - BLK

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.




YSV1 0 - D P - L - D4

Valve Series	Function	Pilot Source	Manual Operator	Solenoid Coil Type	Voltage
YSV1 : Solenoid Valve	0 3/2 Normally Closed Spring Return 1 3/2 Normally Open Spring Return	D Direct Operated	P Push Non-Locking	L 90 Degree Plug-in Wire Assembly With LED M 180 Degree Plug-in Wire Assembly With LED	D4 DC 24V D2 DC 12V






Direct Solenoid Actuated Valves


10mm Pico






YSV10-DP-M-***
Normally Closed Type





YSV11-DP-M-***
Normally Open Type




YSV10-DP-M-***
Normally Open Type



YSV10-DP-L-***
Normally Closed Type





YMF10-M04



(Sealing Area)

YMF10 MANIFOLD BLOCK

(YSV10 Solenoid Valve Use)

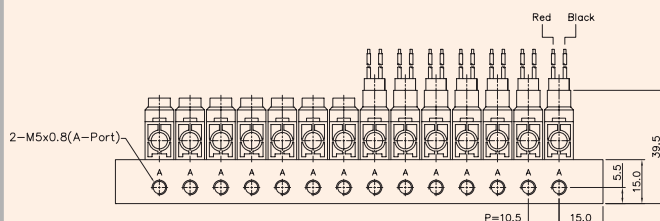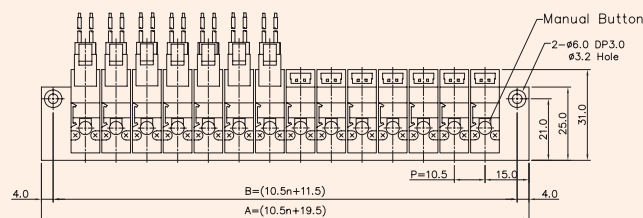

3-PORT MANIFOLD BLOCK DIMENSION

ITEM	n	2	3	4	5	6	7	8	9	10	11	12	13	14
B		32.5	43.0	53.5	64.0	74.5	85.0	95.5	106.0	116.5	127.0	137.5	148.0	158.5
A		40.5	51.0	61.5	72.0	82.5	93.0	103.5	114.0	124.5	135.0	145.5	156.0	166.5


Manifold Block Ordering Code

Symbol	Manifold Station
YMF10	3 Way
	02 2-Station
	04 4-Station
	06 6-Station
	08 8-Station
	10 10-Station
	12 12-Station
	14 14-Station

Blanking Plate Ordering Code

YMF10-BLK	Blanking Plate. (Material: STS304)
	Manifold Gasket. (Material: NBR)

Normally Closed Type

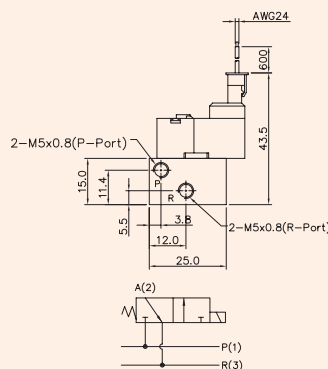

Normally Open Type

