


YSV200. M5

Direct Actuated
Staking Body Valves

- 3/2- Direct Operation Type
- High Durability
- Orifice $\varnothing 1.1\text{mm}$


SPECIFICATION

ITEM	FUNCTION	SERIES	YSV211	YSV221
			3/2-N.C	3/2-N.O
Fluids			Compressed Air & Inert Gases	
Pressure(bar)			0~8.0	
Orifice(mm)			P = $\varnothing 1.1$, R = $\varnothing 1.2$	P = $\varnothing 1.2$, R = $\varnothing 1.1$
Ambient & Fluid Temp.			5~60°C (41~140°F)	
Response Time(5bar)			20ms or Less	
Max. Working Frequency			8c/sec	
Lubrication			Not Required(Use ISO VG32 #)	
Manual Override			Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class			F-Class or Equivalent	
Permissible Voltage Variation			$\pm 10\%$ of Rated Voltage	
Off Min. Residual Voltage			AC:20% or Less / DC:10% or Less	
Power Consumption			AC:3.5VA(60Hz) / DC:2.5W	

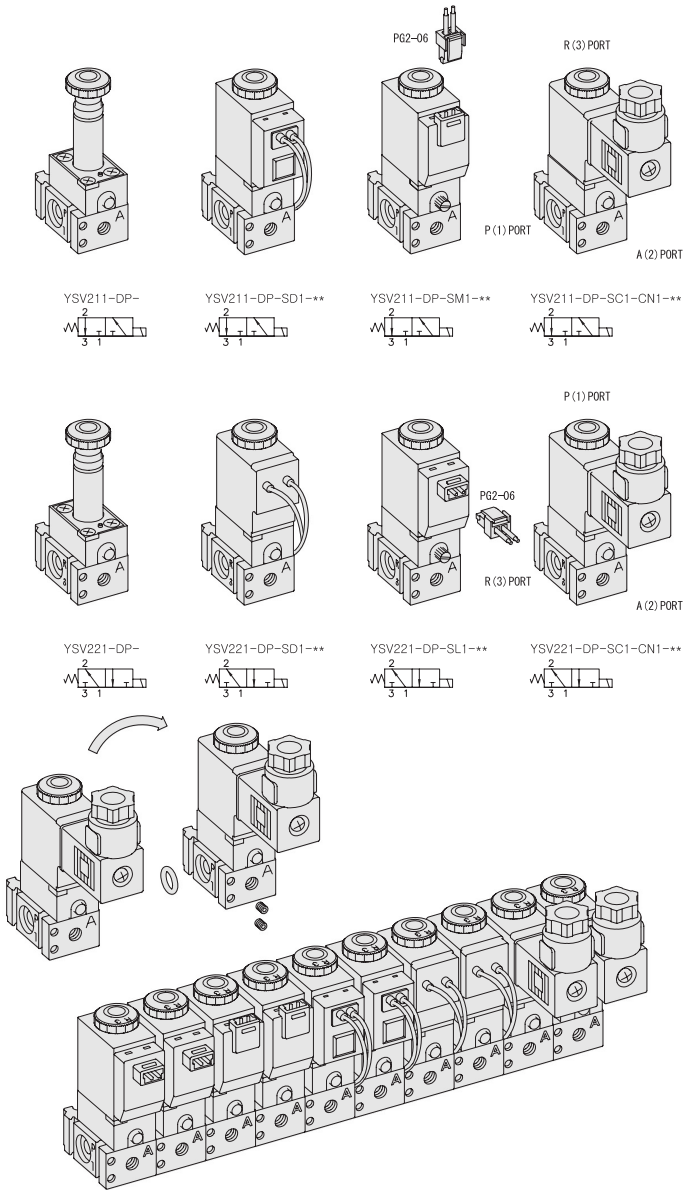

**:: Voltage Selection (see page 80)


Transition Capacity Graph

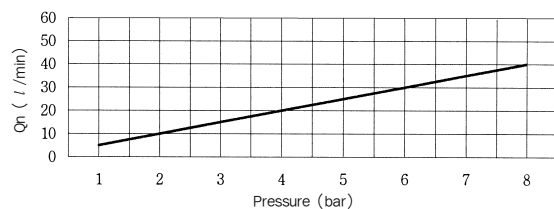

The Material of Parts

- Valve Body : Aluminium
- Pilot Parts : Glass Filled Nylon
- Pilot Plate : Zinc Pressure Die-Cast
- Spring : Stainless
- Seals : NBR
- Armature : Stainless Steel
- Armature Seals : Viton

Plug Connector With Clip



Ordering Code


PG2-06 (L : 600mm)
PG2-10 (L : 1,000mm)

* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.


YSV2 1 1 - D P - SC1 - CN1 - A2

Valve Series	Function	Port Size & Thread	Pilot Source	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
YSV2: Solenoid Valve	1 3/2 Normally Closed Spring Return 2 3/2 Normally Open Spring Return	1 M5x0.8 2 10-32 UNF	D Direct Operated	P Push Non-Locking Override L LeverLocking Override	0 None SC1 3 Pin Connector Coil SG1 Grommet/Flying Leads SD1 Grommet/Flying Leads With LED SL1 90 Degree Plug-in Wire Assembly with LED SM1 180 Degree Plug-in Wire Assembly with LED	0 None CN1 Normal Connector CD1 Connector With LED CZ1 Connector With LED & Surge Suppressor	0 None A2 AC 220V A1 AC 110V A4 AC 24V D4 DC 24V D2 DC 12V








Direct Solenoid Actuated Valves

Port Thread **M5 × 0.8**



PORT	TYPE	N.C	N.O
X		P(1)	R(3)
Y		A(2)	A(2)
Z		R(3)	P(1)











YSV211-DP-SG1-***
Normally Closed

YSV221-DP-SG1-***
Normally Open

YSV211-DP-SC1-CN1-***
Normally Closed

YSV221-DP-SC1-CN1-***
Normally Open



YSV211-DP-SD1-***
Normally Closed








YSV221-DP-SD1-***
Normally Open

YSV211-DP-SL1-***
Normally Closed

YSV221-DP-SL1-***
Normally Open

YSV211-DP-SM1-***
Normally Closed

YSV221-DP-SM1-***
Normally Open

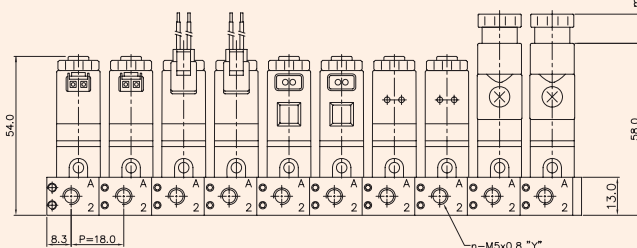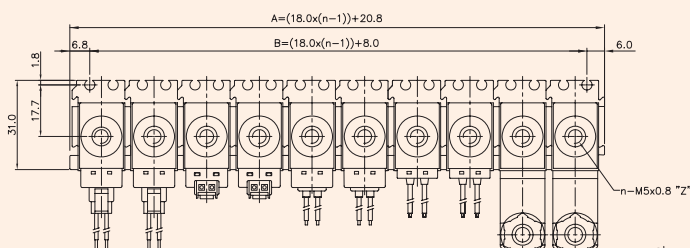

A, B = DIMENSIONS

n = STATION

ITEM	n	2	3	4	5	6	7	8	9	10
A		38.8	56.8	74.8	92.8	110.8	128.8	146.8	164.8	182.8
B		26.0	44.0	62.0	80.0	98.0	116.0	134.0	152.0	170.0