


YSV300. 1/8

Direct Actuated
Staking Body Valves

- 3/2- Direct Operation Type
- High Durability
- Orifice $\varnothing 1.5\text{mm}$


SPECIFICATION

ITEM	SERIES	YSV311	YSV321
	FUNCTION	3/2-N.C	3/2-N.O
Fluids	Compressed Air & Inert Gases		
Pressure(bar)	0~8.0		
Orifice(mm)	P = $\varnothing 1.5$, R = $\varnothing 1.5$ P = $\varnothing 1.5$, R = $\varnothing 1.5$		
Ambient & Fluid Temp.	5~60°C (41~140°F)		
Response Time(5bar)	20ms or Less		
Max. Working Frequency	8c/sec		
Lubrication	Not Required(Use ISO VG32 #)		
Manual Override	Push Button(Standard), Lever Lock(Option)		
Coil Insulation Class	F-Class or Equivalent		
Permissible Voltage Variation	±10% of Rated Voltage		
Off Min. Residual Voltage	AC:20% or Less / DC:10% or Less		
Power Consumption	AC:3.5VA(60Hz) / DC:2.5W		

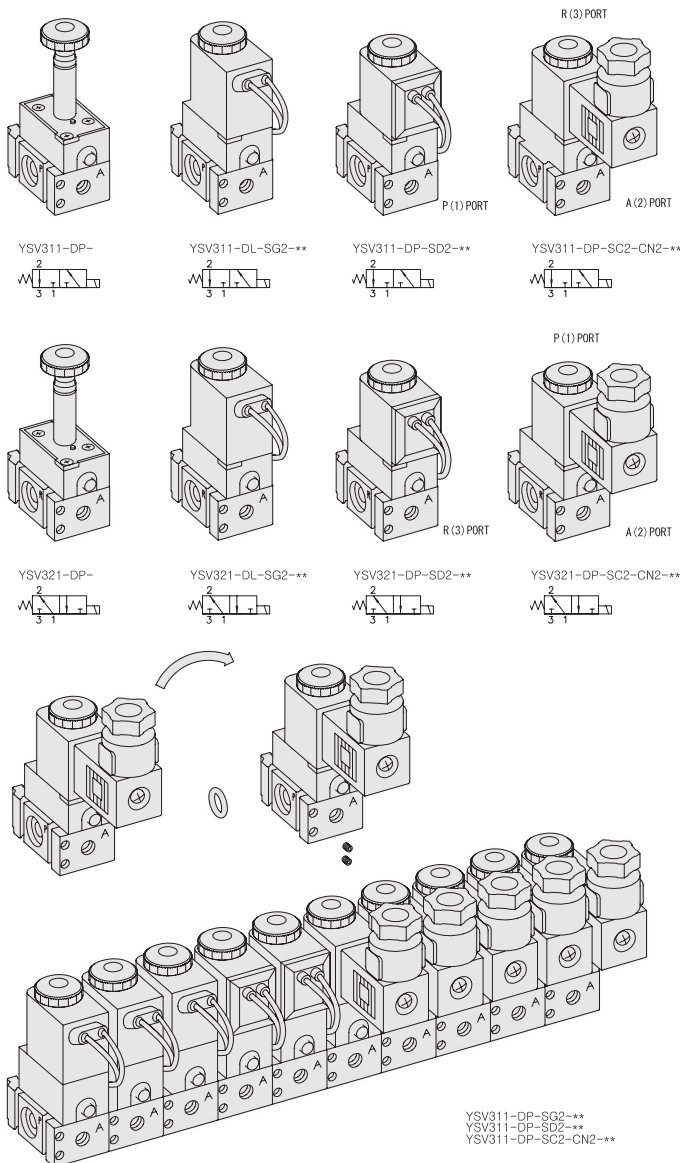

** : Voltage Selection (see page 80)

Transition Capacity Graph

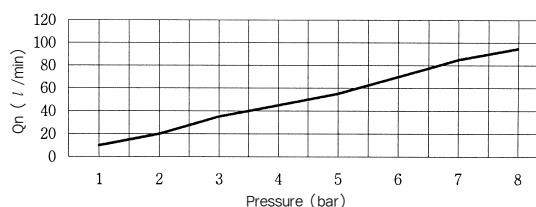

The Material of Parts


- Valve Body : Aluminium
- Pilot Parts : Glass Filled Nylon
- Pilot Plate : Zinc Pressure Die-Cast
- Spring : Stainless
- Seals : NBR
- Armature : Stainless Steel
- Armature Seals : Viton

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.


YSV3 1 1 - D P - SC2 - CN2 - A2

Valve Series	Function		Port Size & Thread		Pilot Source		Manual Operator	Solenoid Coil Type	Connector Type	Voltage			
YSV3 : Solenoid Valve	1	3/2 Normally Closed Spring Return	1	G 1/8	D	Direct Operated	P	Push Non-Locking Override	0	None	0	None	
	2	3/2 Normally Open Spring Return	2	NPT 1/8			L	Lever Locking Override	SC2	3 Pin Connector Coil	CN2	Normal Connector	A2
								SG2	Grommet/Flying Leads	CD2	Connector With LED	A1	AC 110V
								SD2	Grommet/Flying Leads With LED	CZ2	Connector With LED & Surge Suppressor	A4	AC 24V
												D4	DC 24V
												D2	DC 12V




Direct Solenoid Actuated Valves

Port Thread 1/8




PORT	TYPE	N.C	N.O
X	P(1)	R(3)	
Y	A(2)	A(2)	
Z	R(3)	P(1)	





YSV310-DP-SD2-***

Normally Closed




YSV320-DP-SD2-***

Normally Open




YSV310-DP-SG2-***

Normally Closed




YSV320-DP-SG2-***

Normally Open






YSV310-DP-SC2-CN2-***

Normally Closed



YSV320-DP-SC2-CN2-***

Normally Open

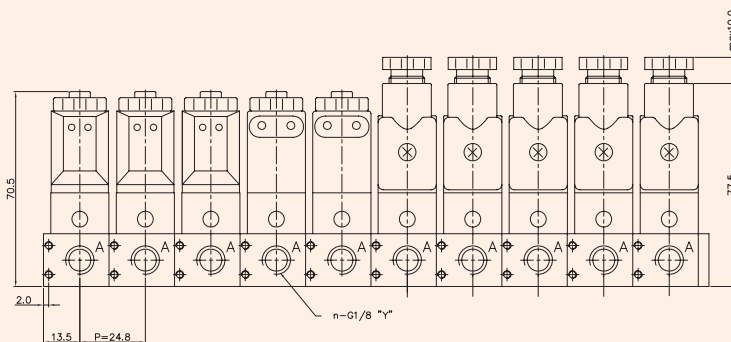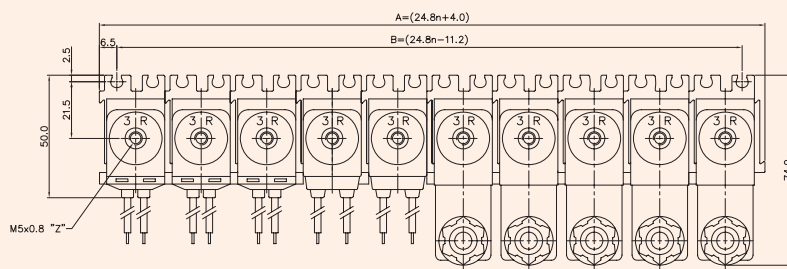

A, B = DIMENSIONS

n = STATION

ITEM	n	2	3	4	5	6	7	8	9	10
A		53.6	78.4	103.2	128.0	152.8	177.6	202.4	227.2	252.0
B		38.4	63.2	88.0	112.8	137.6	162.4	187.2	212.0	236.8