

DIN Connector Series

- A Wide Range of Option
- Various Voltage Specification
- 15mm Coil Width
- 22mm Coil Width

SPECIFICATION

ITEM \ FUNCTION	Connector	
	CN1	CN2
Voltage Tolerances	±10% of Rated Voltage	
Temperature Range	5~60°C (41~140°F)	
Max. Current	2.5A	
Protection Class	IP65(With Coil)	
Section Conductance	Max. 0.75mm ²	Max. 1.50mm ²

The Material of Parts

- Indicator : Glass Pressure Nylon, Polycarbonate
- Sealing Packing : NBR
- Jointing Bolt : Carbon Iron

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.



CN1



CN2



CD1-***



CD2-***



CZ1-***



CZ2-***



***: Voltage Selection

ORDERING NO.

CD1 - A2

Connector Type	
CN1	15mm-3 Pin Normal Connector
CD1	15mm-3 Pin Connector With LED
CZ1	15mm-3 Pin Connector With LED & Surge Suppressor
CN2	22mm-3 Pin Normal Connector
CD2	22mm-3 Pin Connector With LED
CZ2	22mm-3 Pin Connector With LED & Surge Suppressor
CNM2	24mm-3 Pin Metal Normal Connector
CDM2	24mm-3 Pin Metal Connector With LED
CZM2	24mm-3 Pin Metal Connector With LED & Surge Suppressor

Voltage	
A2	AC 220V
A1	AC 110V
A4	AC 24V
D4	DC 24V
D2	DC 12V

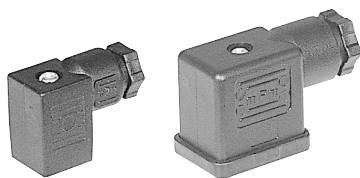

DIN Connector Series

15mm Width / 22mm Width

CN1


(Normal Connector)

CD1-**

(Connector With Connector)

CZ1-**

(Connector With Connector & Surge Suppressor)



CN2


(Normal Connector)

CD2-**

(Connector With Connector)

CZ2-**

(Connector With Connector & Surge Suppressor)

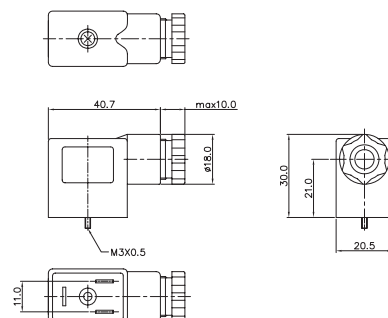

CNM2

Metal Connector

CDM2-**

Metal Connector With LED

CZM2-**

Metal Connector With LED & Surge Suppressor

