

PMEV Series


Panel Mounting Mechanically
Actuated Spool Valves

- 5/2, 3/2 - M5, 1/8, 1/4
- A Wide Range of Option Available
- Direct Operation Type
- Simple Panel Mounting

SPECIFICATION

SERIES	PMEV100	PMEV200	PMEV400
ITEM \ FUNCTION	5/2, 3/2-Way		
Fluids	Compressed Air & Inert Gases		
Port Size	M5	1/8	1/4
Pressure(bar)	0~8.0		
Eff. Sectional Area(mm ²)-5bar	3.5	12.6	19.0
Ambient & Fluid Temp.	5~60°C (41~140°F)		
Lubrication	Not Required(Use ISO VG32 #)		


Transition Capacity Graph

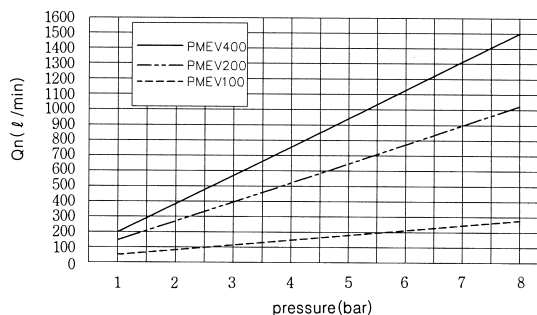

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Button Parts : Stainless Steel, POM
- Switch Parts : Glass Filled Nylon, POM

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

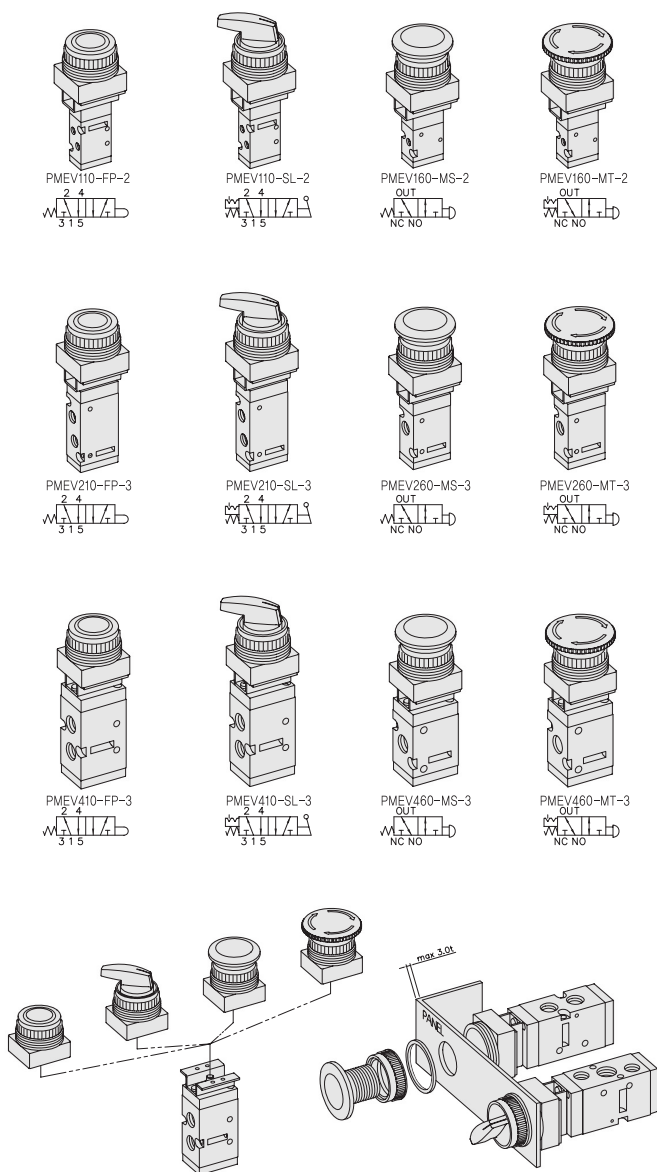

ORDERING NO.

PMEV1

1

0

-

FP

-

2

Valve Series

PMEV1 :
M5×0.8-Port Body

PMEV2 :
1/8-Port Body

PMEV4 :
1/4-Port Body

Function

1	5/2 - Spring Return
6	3/2 - Spring Return

Port Size & Thread

0	G
1	NPT


Switch Type

FP	Flush, Push Button (R)
SL	2-Position Selector (B)
MS	Mushroom 40mm dia Spring Return (R)
MT	Mushroom 40mm dia Turn to Unlock (R)

() Standard Color

Mounting Holes




2	25mm
3	30mm

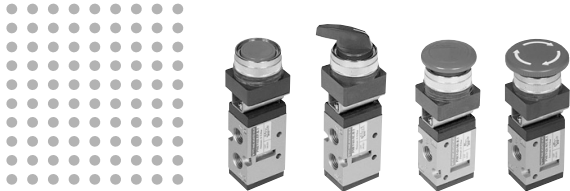

Panel Mounting Mechanically Actuated Spool Valves Port Thread M5, 1/8, 1/4




5/2-Way, Pushrod & Selector Operation Thread-M5×0.8

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	2.5kg
F ₂ Pressure for Invalid Operation	

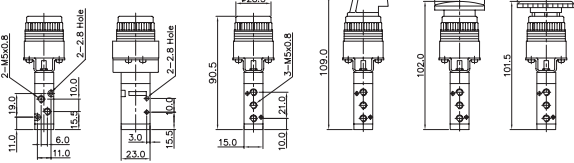




3/2-Way, Pushrod & Selector Operation Thread-M5×0.8

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	2.5kg
F ₂ Pressure for Invalid Operation	

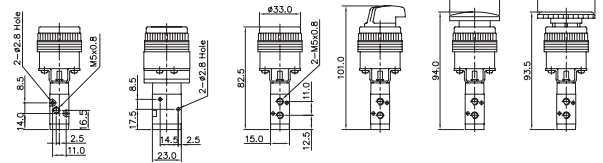




5/2-Way, Pushrod & Selector Operation Thread-1/8

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	3.0kg
F ₂ Pressure for Invalid Operation	

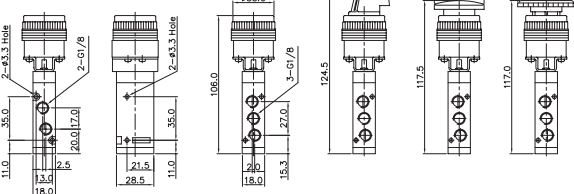




3/2-Way, Pushrod & Selector Operation Thread-1/8

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	3.0kg
F ₂ Pressure for Invalid Operation	

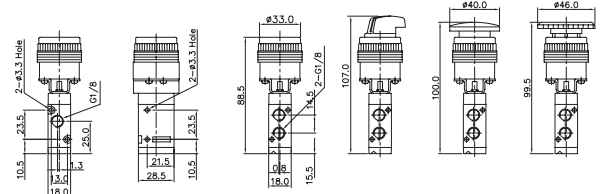

5/2-Way, Pushrod & Selector Operation Thread-1/4

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	4.0kg
F ₂ Pressure for Invalid Operation	

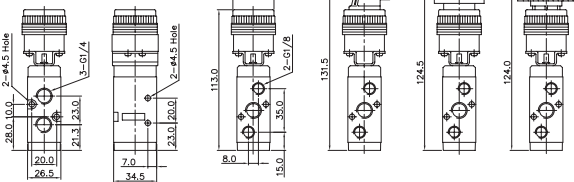

3/2-Way, Pushrod & Selector Operation Thread-1/4

OPERATION SPEC.	
T ₁ Valid Operation Dist	5.5mm
T ₂ Invalid Operation Dist	1.0mm
F ₁ Pressure for Valid Operation	4.0kg
F ₂ Pressure for Invalid Operation	

