


SC300. 1/8

"C" COMPACT Series

Solenoid / Pneumatic Valves


- 5/2, 5/3-1/8, 3/2-M5 ■ 15mm Body Width
- Manifold or Sub-Base Type
- High Efficiency, Space Economy Type
- Transition Flow 500ℓ/min (5bar)

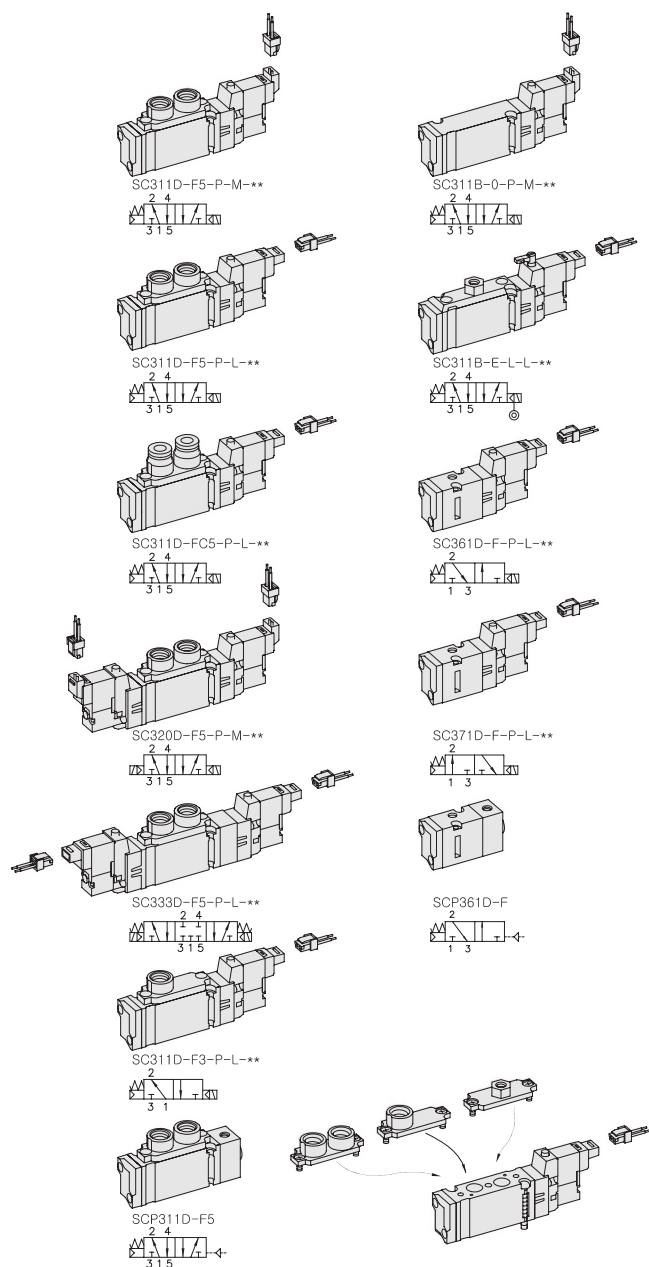

** : Voltage Selection (see page 10)

SPECIFICATION

ITEM	SERIES	SOLENOID, PNEUMATIC	
		5, 3Port 2Position	5Port 3Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~7.0	2.0~7.0
Eff. Sectional Area(mm ²) -5bar		9.0	7.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		8c/sec	5c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		DC:10% or Less	
Power Consumption(DC)		Holding-DC: 0.65W (24V:27.0mA/12V:54.0mA)	

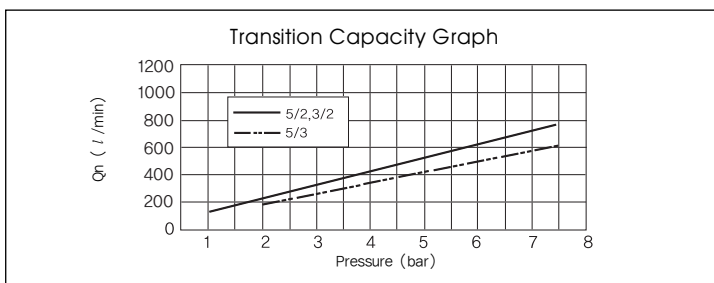

The Material of Parts

■ Valve Body : Die-Cast Aluminium	■ Cap : Zinc Pressure Die-Cast
■ Spool : Aluminium	■ Pilot Parts : Glass Filled Nylon
■ Seals : NBR	■ Armature : Stainless Steel
■ Spring : Stainless	■ Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)


 SC300-F5 5Port G1/8 Bottom Port Plate	 SC300-FC5 5-Port #6 One-Touch Fitting	 SC300-E External Plate
 SC300-F3 3Port G1/8 Bottom Port Plate	 SC300-FC3 3-Port #6 One-Touch Fitting	

* The specification on each item can be amended without any prenotice to improve a performance.
 * The specification on each item can be different from actual specification.

ORDERING NO.

SC3 1 1 D - F5 - P - L - D4

Valve Series	Function	Return Method		Port Type		Port Plate & Thread		Manual Operator		Solenoid Coil Type		Voltage	
SC3 : Solenoid Valve	1 5/2 Single	0	None	D	Manifold	0	None	0	None	0	None	0	None
	2 5/2 Double	1	Air + Spring	B	Sub-Base	F5	5-Port G1/8	P	Push	L	90 Degree Plug-in Wire Assembly with LED	D4	DC 24V
	3 5/3 Closed Center	2	Air			F3	3-Port G1/8		Non-Locking			D2	DC 12V
	4 5/3 Open Center	3	Spring			FN5	5-Port NPT1/8	L	Lever Locking	M	180 Degree Plug-in Wire Assembly with LED		
SCP3 : Pneumatic Valve	5 5/3 Pressure Center					FN3	3-Port NPT1/8						
	6 3/2 Normally Closed					FC5	5-Port #6 One-Touch Fitting						
	7 3/2 Normally Open					FC3	3-Port #6 One-Touch Fitting						
						E	External End Plate, Plate M5×0.8						




Solenoid & Pilot Actuated Spool Valves

Port Thread 1/8, M5

5Port 2Position Solenoid Valve (Manifold)


Single Solenoid

SC311D-F5-P-L-***



Double Solenoid



SC320D-F5-P-L-***



5Port 3Position Solenoid Valve (Manifold)


Closed Center

SC333D-F5-P-M-***




Exhaust Center

SC343D-F5-P-M-***



Pressure Center



SC353D-F5-P-M-***



3Port 2Position Solenoid Valve (Manifold)

Single Solenoid


SC361D-F-P-L-***



5Port 2Position Solenoid Valve (Sub-Base)

Single Solenoid


SC311B-0-P-L-***



Double Solenoid

External Pilot



SC320B-E-P-M-***



5Port 3Position Solenoid Valve (Sub-Base)


Closed Center

SC333B-0-P-L-***




Exhaust Center

SC343B-0-P-L-***



Pressure Center


SC353B-0-P-L-***



5Port 2Position Pneumatic Valve


Single Pneumatic

SCP311D-F5



Double Pneumatic


SCP320D-F5



5Port 3Position Pneumatic Valve


Closed Center

SCP333B



Exhaust Center

SCP343B



Pressure Center



SCP353B



3Port 2Position Pneumatic Valve

Single Pneumatic


SCP361D




SCB30 SINGLE, DOUBLE MANIFOLD BLOCK

(SC300 Solenoid & Pneumatic Valve Use)

Manifold Block Dimension

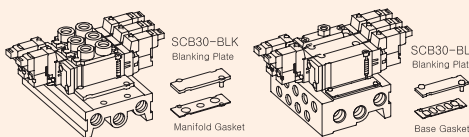

Double Modular Manifold Block Dimension

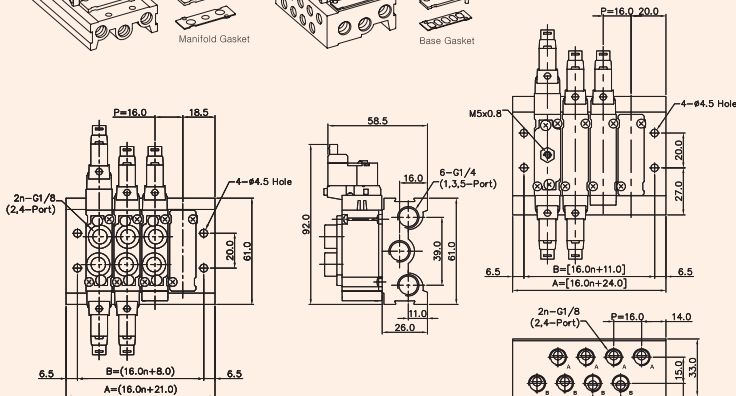


5PORT MANIFOLD BLOCK DIMENSION


ITEM	n	2	4	6	8	10
A		40.0	72.0	104.0	136.0	168.0
B		53.0	85.0	117.0	149.0	181.0

3PORT MANIFOLD BLOCK DIMENSION

ITEM	n	2	4	6	8	10
A		40.0	72.0	104.0	136.0	168.0
B		53.0	85.0	117.0	149.0	181.0




Manifold Block Dimension



Manifold Ordering Code


Series	Port & Thread	Function	Manifold Station
SCB3	0	None	M02 2-Station
SC300 Solenoid Valve	1	G	S Single Station Sub Base, M04 4-Station
	2	NPT	1/4 Port Without Pilot Ports M06 6-Station
			D Manifold, Port 1/4 M08 8-Station
			DB Double Modular Manifold Block, 1/8 Port M10 10-Station
			DC6 Double Modular Manifold Block, Ø6 Fitting
			D3 Manifold, Port 1/8(3/2Way)

Single Station Sub Base Dimension (SCB31-S)



DOUBLE MODULAR DIMENSION

ITEM	n	2	4	6	8	10
A		43.0	75.0	107.0	139.0	172.0
B		56.0	88.0	120.0	152.0	184.0



Ordering Code

SCB36-BLK

Blanking Plate

(Material: STS304)

Manifold Gasket,

(Material: NBR)

Ordering Code

SCB30-BLK

Blanking Plate

(Material: STS304)

Manifold Gasket,

Base Gasket,

(Material: NBR)