


SCE500. 3/8

"E" ECONOMY Series
Solenoid / Pneumatic Valves

- 5/2, 5/3, 3/2-3/8 ■ 26mm Body Width
- Sub-Base or Manifold Mounting Type
- High Efficiency, Expense Reduction Type
- Transition Flow 2200ℓ/min (5bar)

SPECIFICATION


ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5, 3 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		40.0	30.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		30ms or Less	40ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

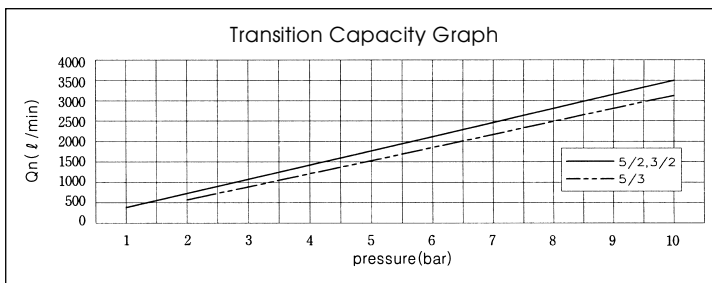

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

Port Plate Ordering Code (Material : Zinc)

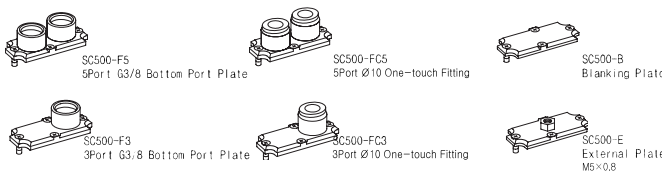

* The specification on each item can be amended without any prenotice to improve a performance.
* The specification on each item can be different from actual specification.

ORDERING NO.

SCE5														1		1		B		-		F		-		P		-		SC2		-		CN2		-		D4	
Valve Series				Function				Return Method				Port Type				Port Plate & Thread				Manual Operator				Solenoid Coil Type				Connector Type				Voltage							
SCE5 : Solenoid Valve				1	5/2 Single			0	None			D	Manifold			F	G3/8			0	None			0	None			0	None										
				2	5/2 Double			1	Air + Spring			B	Sub-Base			FN	NPT 3/8			P	Push			SC2	3 Pin Connector Coil			CN2	Normal Connector			A2	AC 230V						
				3	5/3 Closed Center			2	Air							FC	ø 10 One-Touch Fitting				Non-Locking			SG2	Grommet / Flying Leads			CD2	Connector With LED			A1	AC 110V						
				4	5/3 Open Center			3	Spring											L	Lever Locking			SD2	Grommet / Flying Leads With LED			CZ2	Connector With LED & Surge Suppressor			A4	AC 24V						
SCEP5 : Pneumatic Valve				5	5/3 Pressure Center											B	Blanking End Plate																			D4	DC 24V		
				6	3/2 Normally Closed											E	External End Plate, Plate M5×0.8																			D2	DC 12V		
				7	3/2 Normally Open																																		







Solenoid & Pilot Actuated Spool Valves



Port Thread 3/8

5Port 2Position Solenoid Valve (Manifold)

Single Solenoid
SCE511D-B-P-SG2-***






Double Solenoid
SCE520B-F-P-SG2-***





5Port 2Position Solenoid Valve (Sub-Base)

Single Solenoid
SCE511B-B-P-SG2-CN2-***






Double Solenoid
External Pilot
SCE520B-E-P-SG2-CN2-***






5Port 2Position Pneumatic Valve

Single Pneumatic
SCEP511B-F





Double Pneumatic
SCEP520B-F





5Port 3Position Solenoid Valve (Manifold)


Closed Center
SCE533B-F-P-SG2-***



Exhaust Center
SCE543B-F-P-SG2-***





Pressure Center
SCE553B-F-P-SG2-***




5Port 3Position Solenoid Valve (Sub-Base)


Closed Center
SCE533B-B-P-SG2-CN2-***



Exhaust Center
SCE543B-B-P-SG2-CN2-***





Pressure Center
SCE553B-B-P-SG2-CN2-***




5Port 3Position Pneumatic Valve


Closed Center
SCEP532B-B



Exhaust Center
SCEP542B-B





Pressure Center
SCEP552B-B



SCB50 SINGLE, DOUBLE MANIFOLD BLOCK

(SCE500 Solenoid & Pneumatic Valve Use)


Manifold Block Dimension



SCB50-BLK
Blanking Plate
Blanking Plate Gasket

SCB51-D-M04
Manifold Block

Double Modular Sub Base Dimension


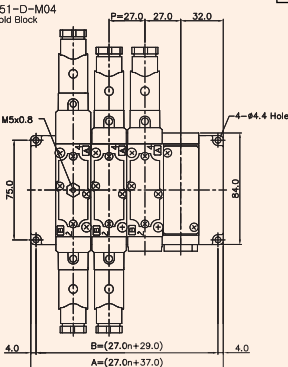


Manifold Ordering Code


SCB5 1 - D - M04			
Series	Port & Throd	Function	Manifold Station
SCB5	0 None	0 None	M02 2-Station
SCE500 Solenoid Valve	1 G	S Single Station Sub Base, 3/8 Port Without Pilot Ports	M04 4-Station
	2 NPT	D Manifold, Port 3/8	M06 6-Station
		DB Double Modular Sub Base, 3/8 Port Without Pilot Ports	M08 8-Station
		DC10 Double Modular Sub Base, ø 10 Fitting	M10 10-Station
		E End Cover, 3/8 Port	
		EB End Blanking Cover	

Double Modular Sub Base Dimension					
ITEM	2	4	6	8	10
B	83.0	137.0	191.0	245.0	299.0
A	91.0	145.0	199.0	253.0	307.0

Single Station Sub Base Dimension



Ordering Code
SCB50-DC10
Double Modular Sub Base
ø10 one-touch fitting
(Material: Al)



Ordering Code
SCB51-DB
Double Modular Sub Base, 3/8
(Material: Al)



Ordering Code
SCB50-EB
End Blanking Cover
(Material: Al)



Ordering Code
SCB50-BLK
Blanking Plate
(Material: STS304)
Manifold Gasket,
Base Gasket,
(Material: NBR)



Ordering Code
SCB51-E
End Cover, 3/8
(Material: Al)