

SF5000. 3/8


"F" FLEXIBLE Series

Solenoid / Pneumatic Valves

- 5/2, 5/3, 3/2 - 3/8
- 32mm Body Width
- Transition Flow 2000ℓ/min (5bar)

SPECIFICATION


ITEM	SERIES FUNCTION	SOLENOID, PNEUMATIC	
		5, 3 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Section Area(mm ²)-5bar		36.0	30.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		30ms or Less	40ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

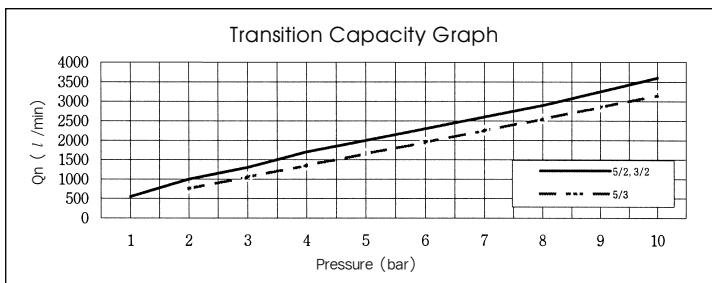

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Pilot Parts : Glass Filled Nylon
- Spool : Aluminium
- Armature : Stainless Steel
- Seals : NBR
- Armature Seals : Viton
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

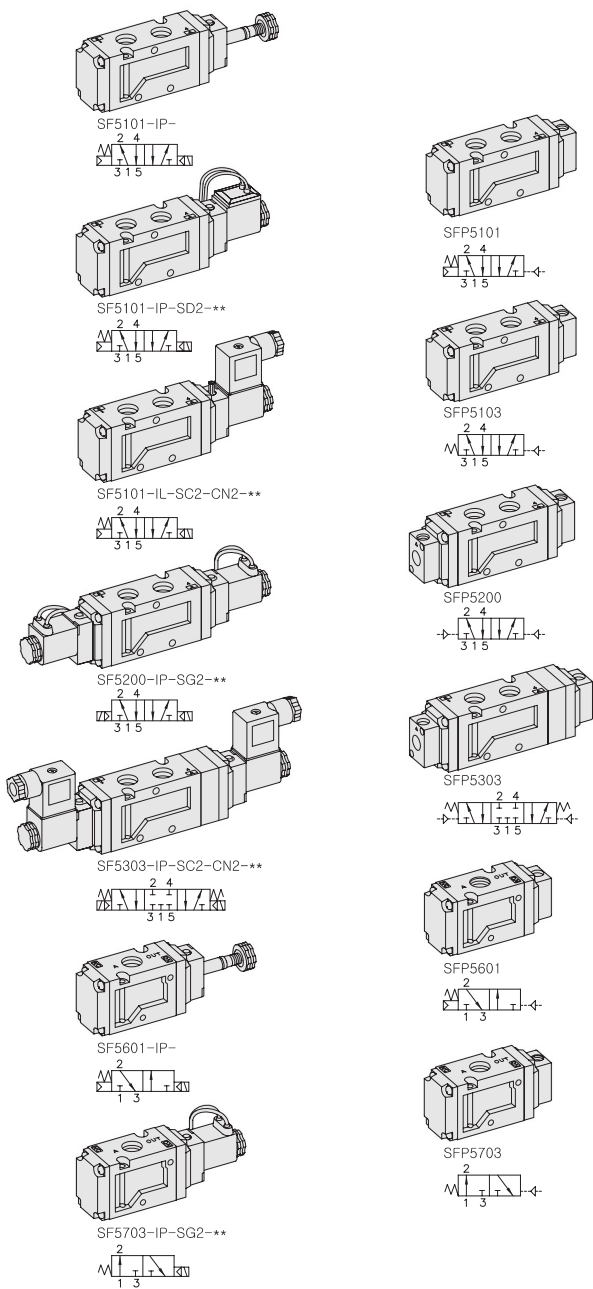


**:Voltage Selection (see page 80)

ORDERING NO.

SF5 1 0 1 - I P - SC2 - CN2 - A2

Valve Series	Function	Port Size & Thread	Return Method	Int/Ext. Pilot	Manual Operator	Solenoid Coil Type	Connector Type	Voltage
SF5 : Solenoid Valve	1 5/2 Single	0 G 3/8	0 None	I Internal Pilot	0 None	0 None	0 None	0 None
	2 5/2 Double	1 NPT 3/8	1 Air + Spring		P Push Non-Locking	SC2 3 Pin Connector Coil	CN2 Normal Connector	A2 AC 220V
	3 5/3 Closed Center		2 Air		L Lever Locking	SG2 Grommet/Flying Leads	CD2 Connector With LED	A1 AC 110V
	4 5/3 Open Center		3 Spring			CZ2 Connector With LED & Surge Suppressor	A4 AC 24V	
SFP5 : Pneumatic Valve	5 5/3 Pressure Center					SD2 Grommet/Flying Leads With LED	D4 DC 24V	
	6 3/2 Normally Closed						D2 DC 12V	
	7 3/2 Normally Open							




Solenoid & Pilot Actuated Spool Valves

Port Thread 3/8

5Port 2Position Solenoid Valve


Single Solenoid
SF5300-IP-SC2-CN2-***
22 44
33 65

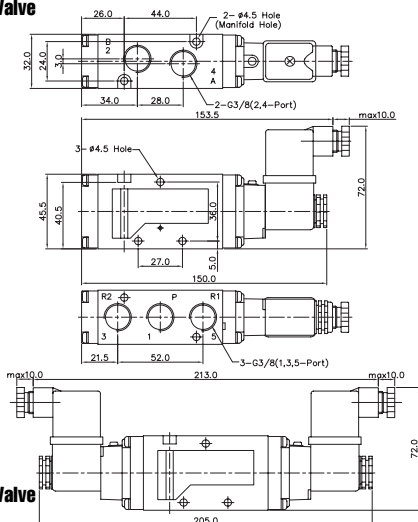

Double Solenoid
SF5300-IP-SC2-CN2-***
22 44
33 65


5Port 3Position Solenoid Valve

Double Center
SF5303-IP-SC2-CN2-***
2 4
3 15
Exhaust Center
SF5403-IP-SC2-CN2-***
2 4
3 15
Pressure Center
SF5503-IP-SC2-CN2-***
2 4
3 15

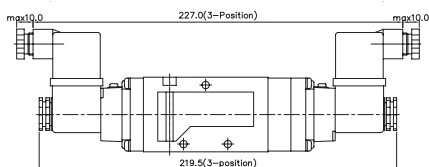

3Port 2Position Solenoid Valve


Normally Closed
SF5601-IP-SD2-***
2
3
Normally Closed
SF5701-IP-SD2-***
2
3

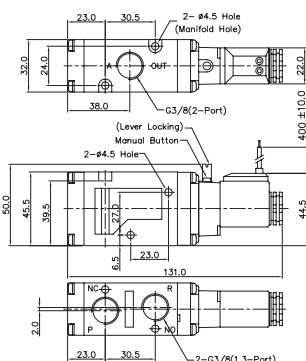

5Port 2Position Pneumatic Valve

Single Pneumatic
SFP5101
2 4
3 15

Double Pneumatic
SFP5200
2 4
3 15

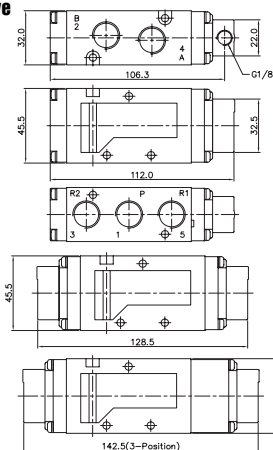


5Port 3Position Pneumatic Valve

Closed Center
SFP5303
2 4
3 15
Exhaust Center
SFP5403
2 4
3 15
Pressure Center
SFP5503
2 4
3 15

3Port 2Position Pneumatic Valve

Single Pneumatic
SFP5601
2
3




MF5000 MANIFOLD BLOCK

(SF5000 Solenoid & Pneumatic Valve Use)

5-Port Manifold Block


MF5500-4

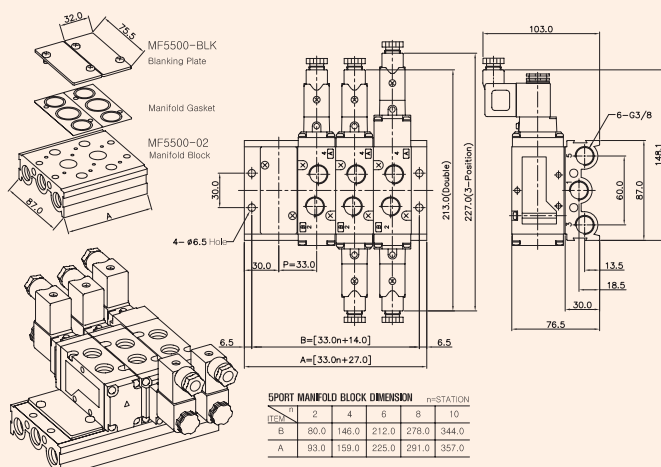

5PORT MANIFOLD BLOCK DIMENSION	n=STATION
ITEM	2 4 6 8 10
B	80.0 146.0 212.0 278.0 344.0
A	93.0 159.0 225.0 291.0 357.0

3-Port Manifold Block

MF5300-4

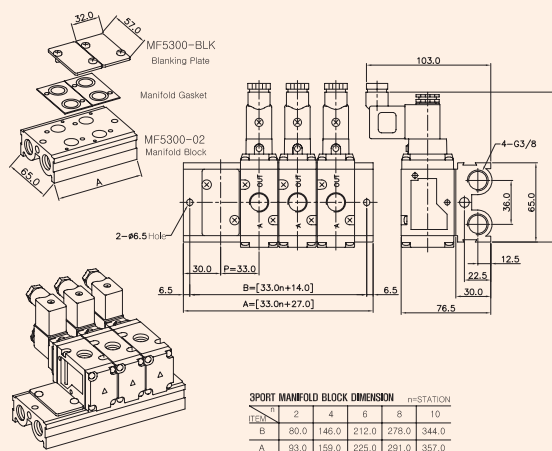

3PORT MANIFOLD BLOCK DIMENSION	n=STATION
ITEM	2 4 6 8 10
B	80.0 146.0 212.0 278.0 344.0
A	93.0 159.0 225.0 291.0 357.0

Manifold Block Ordering Code

MF 5500	-	2
Series	Manifold Station	
MF5500	5 Way	02 2-Station
MF5300	3 Way	04 4-Station
		06 6-Station
		08 8-Station
		10 10-Station

Blanking Plate Ordering Code

MF5500-BLK
Blanking Plate.
(Material: SCP1)
Manifold Gasket.
(Material: NBR)

MF5300-BLK
Blanking Plate.
(Material: SCP1)
Manifold Gasket.
(Material: NBR)