


SIE200

"E" ECONOMY Series
Solenoid / Pneumatic Valves


- 5/2, 5/3
- 18mm Body Width
- Sub-Base or Manifold Mounting Type
- Transition Flow 700ℓ/min (5bar)

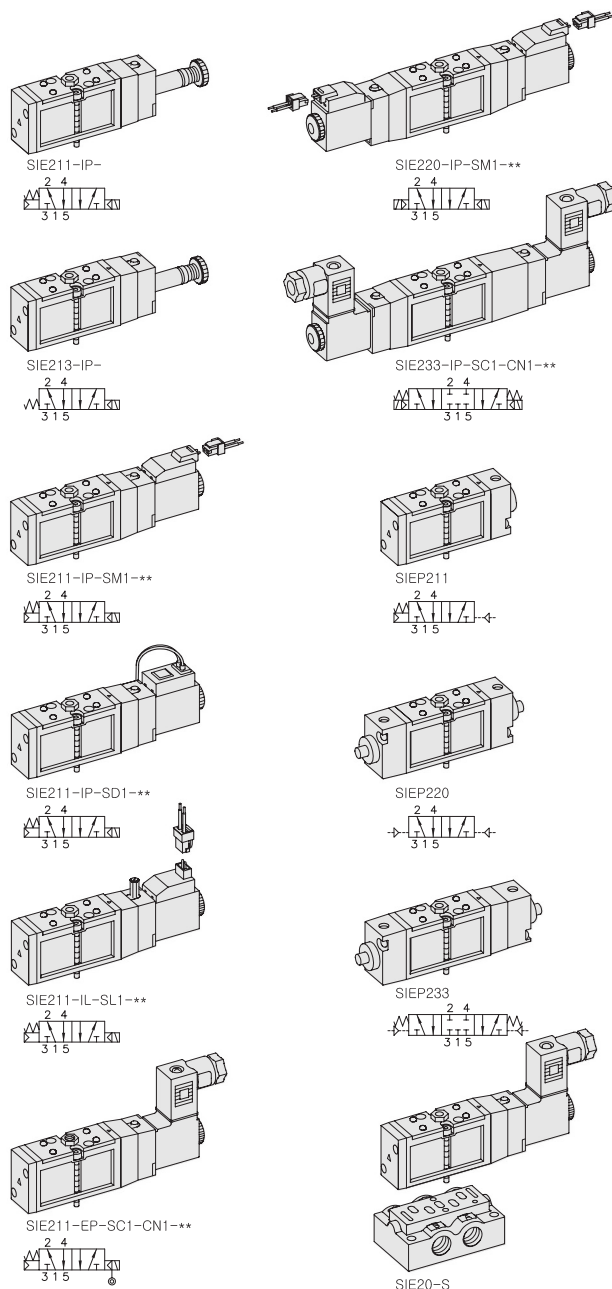

**: Voltage Selection (see page 80)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		12.0	8.5
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		25ms or Less	35ms or Less
Max. Working Frequency		5c/sec	3c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:3.5VA(60Hz) / DC:2.5W	

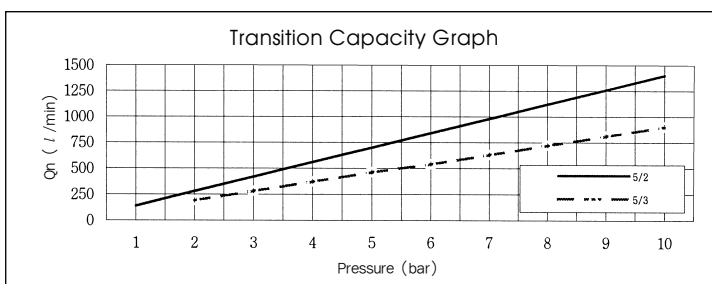



The Material of Parts

- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

Valve Series		Function		Return Method		Int/Ext. Pilot		Manual Operator		Solenoid Coil Type		Connector Type		Voltage	
SIE2		1	5/2 Single	0	None	I	Internal Pilot	0	None	0	None	0	None	0	None
		2	5/2 Double	1	Air + Spring	E	External Pilot	P	Push Non-Locking	SC1	3 Pin Connector Coil	CN1	Normal Connector	A2	AC 220V
		3	5/3 Closed Center	2	Air			L	Lever Locking	SG1	Grommet/Flying Leads	CD1	Connector With LED	A1	AC 110V
SIEP2		4	5/3 Open Center	3	Spring					SD1	Grommet/Flying Leads With LED	CZ1	Connector With LED & Surge Suppressor	A4	AC 24V
		5	5/3 Pressure Center							SL1	90 Degree Plug-in Wire Assembly With LED			D4	DC 24V
										SM1	180 Degree Plug-in Wire Assembly With LED			D2	DC 12V




Solenoid & Pilot Actuated Spool Valves


18mm Body Width

5Port 2Position Solenoid Valve


Single Solenoid
SIE211-IP-SG1-***




External Pilot
SIE211-EP-SG1-***





SIE211-IP-SM1-***



SIE211-IP-SC1-CN1-***




Double Solenoid
SIE220-IP-SL1-***

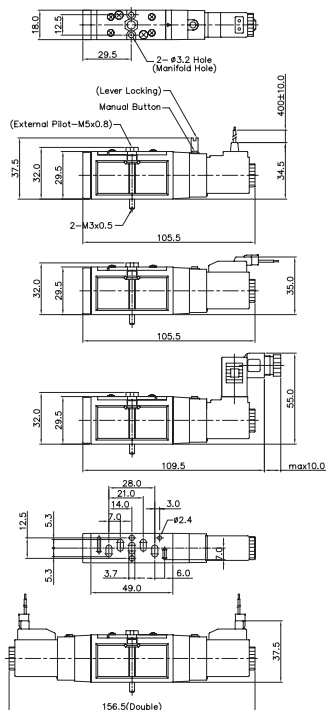

5Port 3Position Solenoid Valve



Closed Center
SIE233-IP-SC1-CN1-***



Exhaust Center
SIE243-IP-SC1-CN1-***



Pressure Center
SIE253-IP-SC1-CN1-***

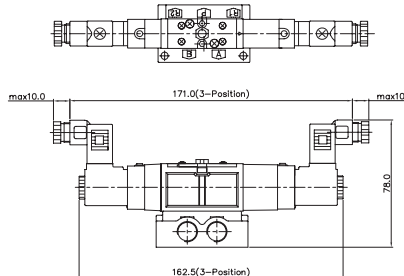


5Port 2Position Pneumatic Valve

Single Pneumatic
SIEP211




Double Pneumatic
SIEP220



5Port 3Position Pneumatic Valve



Closed Center
SIEP233



Exhaust Center
SIEP243



Pressure Center
SIEP253

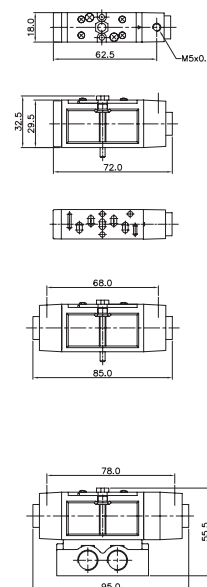


Sub Base Ordering Code


Sub Base Series	Port & Thread	Function
SIB2	0 None	S Single Station Sub Base, 1/4 Port Without Pilot Ports
SIE200 Solenoid Valve	1 G	SP Single Station Sub Base, 1/4 Port With Pilot Ports
	2 NPT	DB Double Modular Sub Base, 1/8 Port Without Pilot Ports
		DC6 Double Modular Sub Base #6 One-Touch Fitting
		E End Cover, 1/8 Port
		EB End Blanking Cover

SIB20 SINGLE, DOUBLE SUB BASE


(SIE200 Solenoid & Pneumatic Valve Use Sub Base)

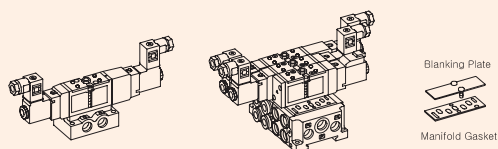

Single Station Sub Base Dimension

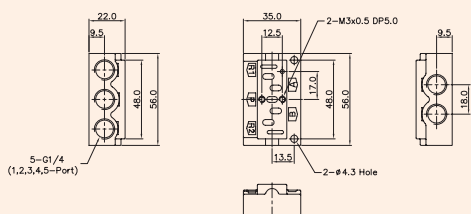

Double Modular Sub Base Dimension

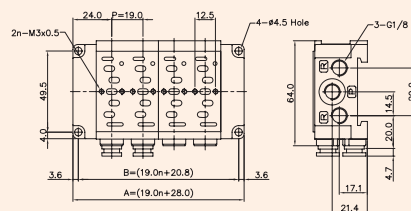

DOUBLE MODULAR SUB BASE DIMENSION (mm)		POSITION				
PORT	PORT	2	4	6	8	10
B	58.8	96.8	134.8	172.8	210.8	
A	66.0	104.0	142.0	180.0	218.0	

Ordering Code SIB20-BLK	Blanking Plate (Material: STS304)
Ordering Code SIB20-E	End Cover, 1/8 (Material: Al)
Ordering Code SIB20-EB	End Blanking Cover (Material: Al)
Ordering Code SIB21-DB	Double Modular Sub Base, 1/8 (Material: Al)
Ordering Code SIB20-DC6	Double Modular Sub Base #6 one-touch fitting (Material: Al)