


SIV500


ISO-2

Solenoid / Pneumatic Valves



- 5/2, 5/3 ■ 50mm Body Width
- 30mm CNOMO PILOT
- Sub-Base Mounting Type
- Transition Flow 3500ℓ/min (5bar)




SIV511-IP-***





SIP511




SIV511-EP-SC2-CN2-***





SIP520





SIV520-IP-SD2-***



SIP533

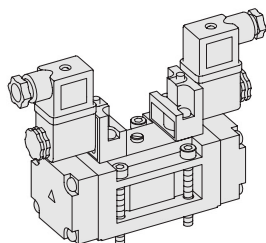


SIV533-IP-SC2-CN2-***

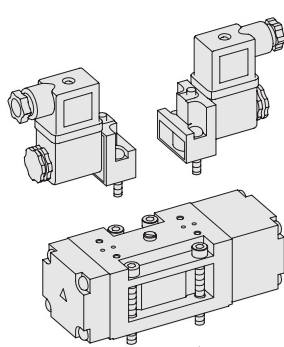

** : Voltage Selection (see page 80)

SPECIFICATION

ITEM	FUNCTION	SOLENOID, PNEUMATIC	
		5 Port 2 Position	5 Port 3 Position
Fluids		Compressed Air & Inert Gases	
Pressure(bar)		1.5~10.0	2.0~10.0
Eff. Sectional Area(mm ²) -5bar		65.0	50.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Response Time(5bar)		35ms or Less	45ms or Less
Max. Working Frequency		3c/sec	1c/sec
Lubrication		Not Required(Use ISO VG32 #)	
Manual Override		Push Button(Standard), Lever Lock(Option)	
Coil Insulation Class		F-Class or Equivalent	
Permissible Voltage Variation		±10% of Rated Voltage	
Off Min. Residual Voltage		AC:20% or Less / DC:10% or Less	
Power Consumption		Holding-AC:5.5VA(60Hz) / DC:2.5W	

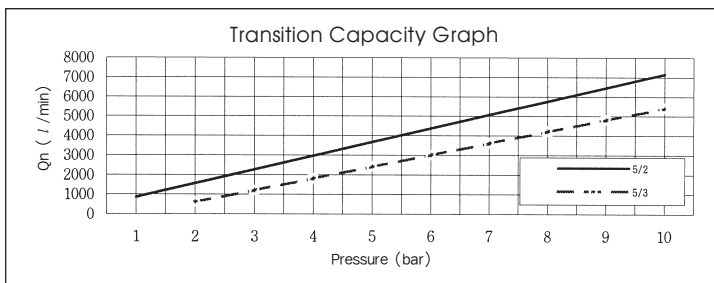

The Material of Parts


- Valve Body : Die-Cast Aluminium
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Cap : Zinc Pressure Die-Cast
- Pilot Parts : Glass Filled Nylon
- Armature : Stainless Steel
- Armature Seals : Viton

※ The specification on each item can be amended without any prenotice to improve a performance.
 ※ The specification on each item can be different from actual specification.

ORDERING NO.

SIV5 1 1 - I P - SC2 - CN2 - A2

Valve Series	Function	Return Method		Int/Ext. Pilot	Manual Operator	Solenoid Coil Type		Connector Type	Voltage	
SIV5 : Solenoid Valve	1 5/2 Single	0	None	I Internal Pilot	0 None	0	None	0	None	0
	2 5/2 Double	1	Air + Spring	E External Pilot	P Push Non-Locking	SC2	3 Pin Connector Coil	CN2	Normal Connector	A2 AC 220V
	3 5/3 Closed Center	2	Air		L Lever Locking	SG2	Grommet/Flying Leads	CD2	Connector With LED	A1 AC 110V
	4 5/3 Open Center	3	Spring			SD2	Grommet/Flying Leads With LED	CZ2	Connector With LED & Surge Suppressor	A4 AC 24V
SIP5 : Pneumatic Valve	5 5/3 Pressure Center									D4 DC 24V
										D2 DC 12V




5Port 2Position Solenoid Valve

Single Solenoid
SIV511-IP-SD2-***





External Pilot

SIV511-EP-SD2-***



Double Solenoid
SIV520-IP-SC2-CN2-***

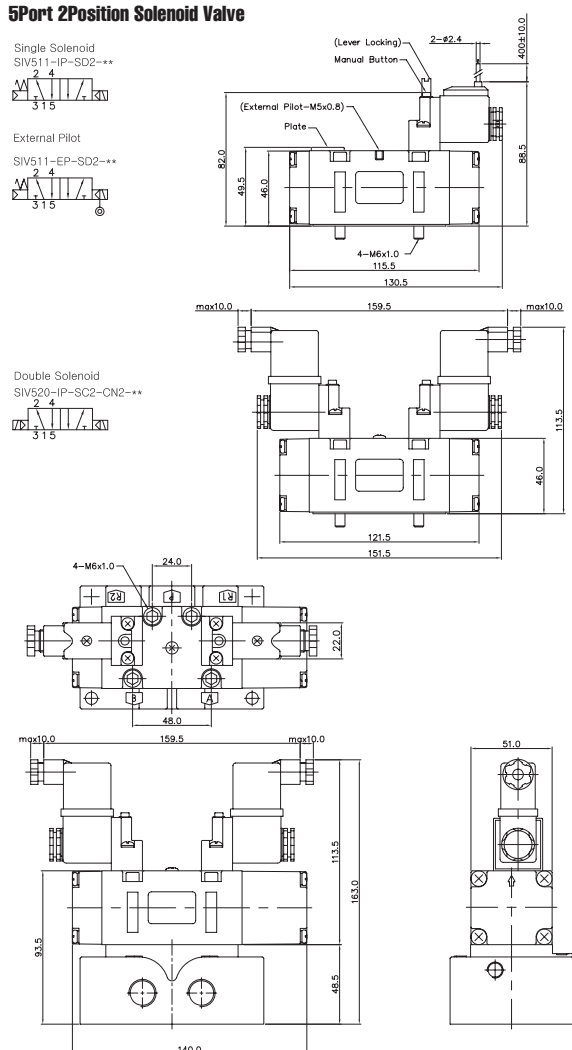

5Port 3Position Solenoid Valve

Closed Center
SIV533-IP-SC2-CN2-***



Exhaust Center
SIV543-IP-SC2-CN2-***



Pressure Center
SIV553-IP-SC2-CN2-***




5Port 2Position Pneumatic Valve

Single Pneumatic
SIP511




Double Pneumatic
SIP520

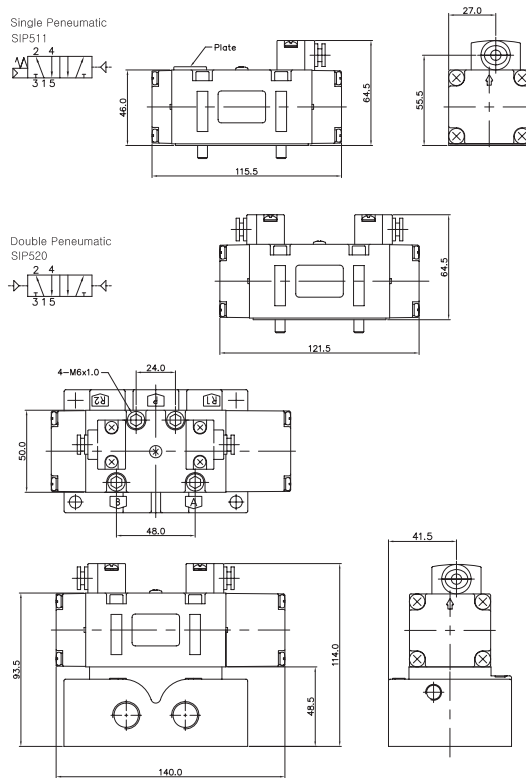


5Port 3Position Pneumatic Valve


Closed Center
SIP533



Exhaust Center
SIP543



Pressure Center
SIP553




Sub Base Ordering Code

SIB5 1 - S			
Sub Base Series	Port & Thread	Function	
SIB5	0 None	S	Single Station Sub Base, Without Pilot Ports
SIV500 Solenoid Valve	2 G 3/8	SP	Single Station Sub Base, With Pilot Ports
	3 G 1/2		
	4 G 3/4		
	7 NPT 3/8		
	8 NPT 1/2		
	9 NPT 3/4		


SIB50 SINGLE SUB BASE

(SIV500 Solenoid & Pneumatic Valve Use Sub Base)



Single Station Sub Base Dimension



Sub Base Gasket
(Material: NBR)



Sub Base
(Material: Al)

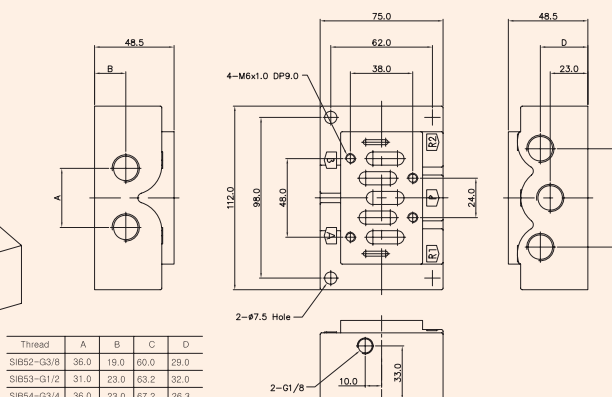

Thread	A	B	C	D
SIB52-G3/8	36.0	19.0	60.0	29.0
SIB53-G1/2	31.0	23.0	63.2	32.0
SIB54-G3/4	36.0	23.0	67.2	26.3