
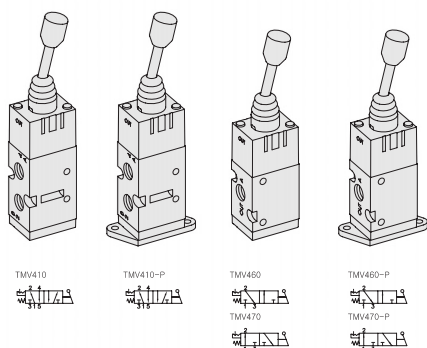


TMV Series

Toggle Lever operated Mechanically
Actuated Spool Valves


- 5/2, 3/2 - 1/8, 1/4
- Direct Operation Type
- Simple Operation
- Manifold Mounting Type

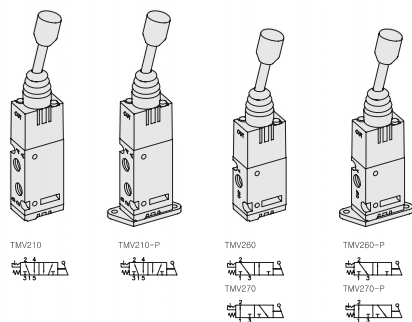

SPECIFICATION

ITEM	SERIES	TMV200	TMV400
		5/2, 3/2-Way	
Fluids		Compressed Air & Inert Gases	
Port Size		1/8	1/4
Pressure(bar)		2.0~10.0	0~8.0
Eff. Sectional Area(mm ²) -5bar		9.0	18.0
Ambient & Fluid Temp.		5~60°C (41~140°F)	
Lubrication		Not Required(Use ISO VG32 #)	

Transition Capacity Graph

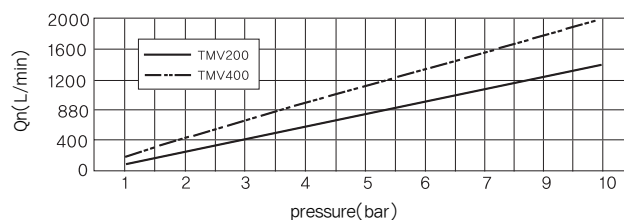

The Material of Parts

- Valve Body : Die-Cast Aluminium
- Cap : Zinc Pressure Die-Cast
- Spool : Aluminium
- Seals : NBR
- Spring : Stainless
- Lever Parts : Steel, NBR, Aluminium

Standing Plate (Material : SCP1)



Ordering Code
TMV-P

※ The specification on each item can be amended without any prenotice to improve a performance.
※ The specification on each item can be different from actual specification.

ORDERING NO.

TMV2

1

-

0

-

P

Valve Series

TMV2 :
1/8-Port Body

TMV4 :
1/4-Port Body

Function

1	5/2 Single
6	3/2 Normally Closed
7	3/2 Normally Open

Port Size & Thread

0	G
1	NPT



Plate

P	Standing Plate
---	----------------



Port Thread 1/8, 1/4

3/2-Way, Toggle Lever Manually Actuated Valve Thread-G1/8

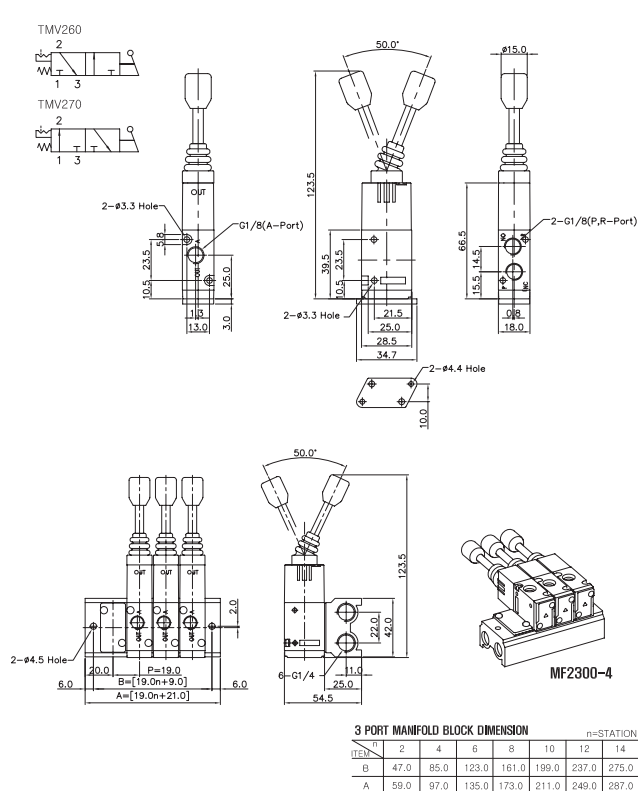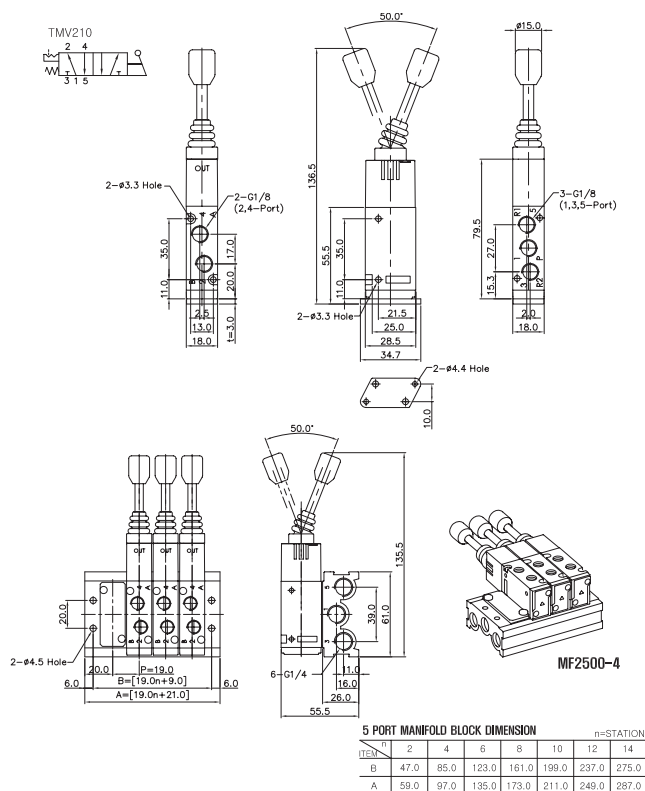

3/2-Way, Toggle Lever Manually Actuated Valve Thread-G1/4

