

Welcome!

CIS 7000: Special Topics on Mobile and IoT Sensing

Mingmin Zhao


Lecture 6



Wireless Network Architectures

There are 3 kinds of wireless network architectures

Access Network

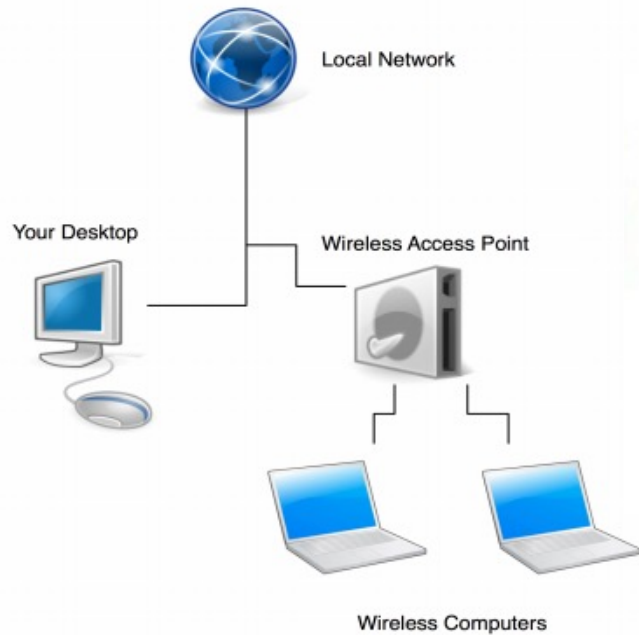


e.g., WiFi, cellular

Device-to-device



e.g., Bluetooth

Ad Hoc Network

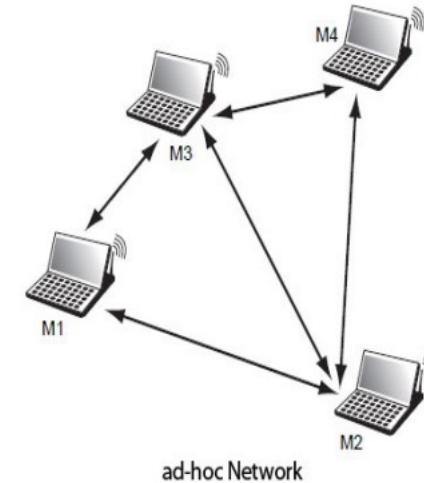

e.g., leverage P2P to reach internet (crises)

One-hop

Multi-hop

Networking From the Rooftop

MIT researchers are developing new routing strategies for a wireless network that hops data in the roofs of the city.


by **Erico Guizzo**

Aug 29, 2003

A few weeks ago, MIT graduate student Shan Sinha canceled his broadband Internet service. Now his Net connection comes through the chimney. From


7 YEARS AFTER ROOFNET, MIT AND CSAIL CHOOSE MERAKI FOR WIRELESS LAN

February 17, 2010
Posted by: @merakisimon
[Share](#)

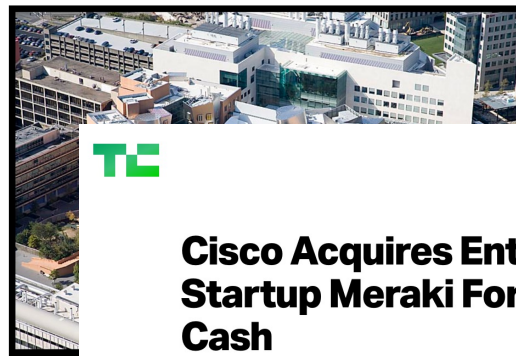

Cisco Acquires Enterprise Wi-Fi Startup Meraki For \$1.2 Billion In Cash

Josh Constone @joshconstone / 6:36 pm EST • November 18, 2012

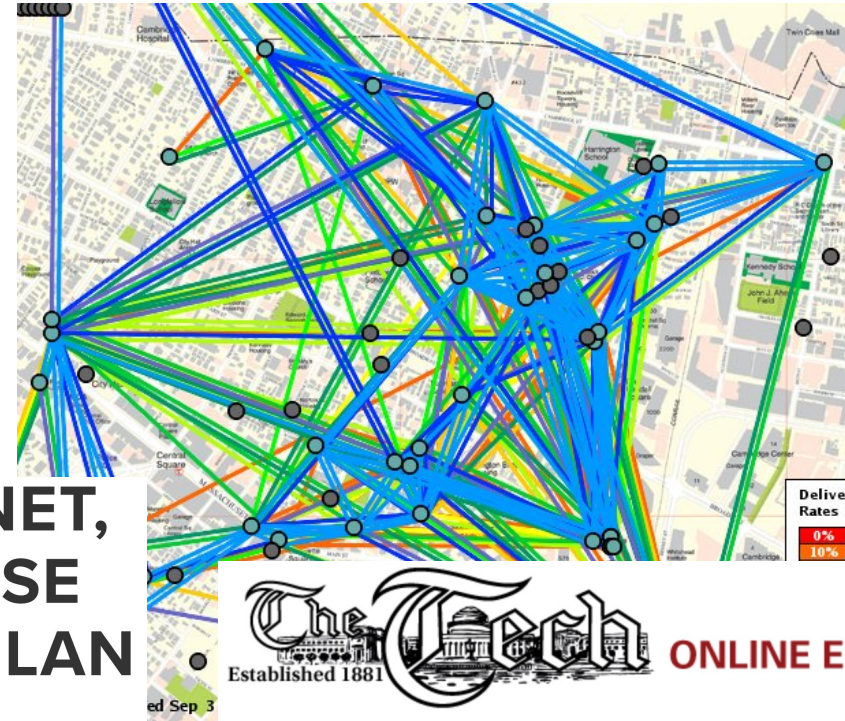

ONLINE EDITION

[HOME](#) [NEWS](#) [OPINION](#) [ARTS](#) [SPORTS](#) [CAMPUS LIFE](#) [PHOTOS](#) [BLOGS](#)

Volume 125 >> Issue 65 : Wednesday, February 1, 2006

[PDF of This Issue](#)

MIT and City Collaborate To Provide Free

Thibault
NEWS EDITOR

MIT researchers may provide Cambridge with a free, city-wide, wireless internet service as early as next year. The project will rely on a mesh networking technology that allows individual computers to become nodes, projecting the reach of the network beyond its original antennas.

One of the project's goals is to provide internet access to Cambridge residents who live in public housing, said Cambridge City Manager Mary P. Hart, though the resulting infrastructure will have a far wider benefit for the city.

John '68, vice president for Information Services and Technology, said he expects the maximum speed of the network to be 54 megabits per second. The speed users experience will decline as more people access the network.

Although the level of internet service will not be known until the antennas are tested, users should be able to use a browser and send e-mail, though they might not be able to send large pictures or view streaming video.

Single Path Routing

Represent the wireless network as a graph

- Two nodes have an edge if they can communicate (i.e., are within radio range)
- Each edge is labeled with a weight (where a smaller weight indicates a preferred edge)

Run shortest path algorithm on the graph (e.g., Dijkstra)

- Produce the minimum weight path between every pair of nodes

How do you pick the edge weights?

- i.e., what metric should shortest path minimize?


Focus of this lecture

Approach 1:

Assign all edges the same weight → Minimize number of hops

Reasoning:


- Links in route share radio spectrum
- Extra hops reduce throughput

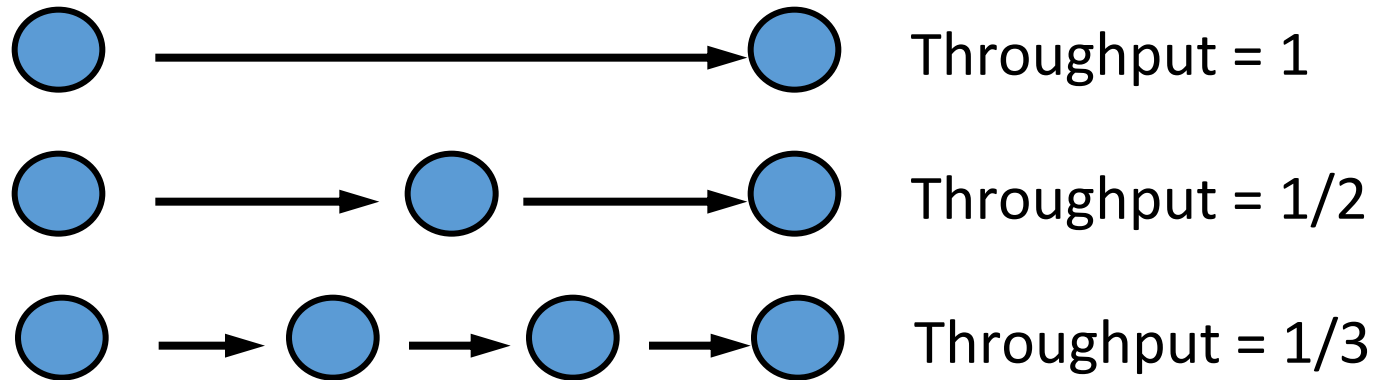

Pros? Cons?


Challenge: many links are lossy

One-hop broadcast delivery ratios

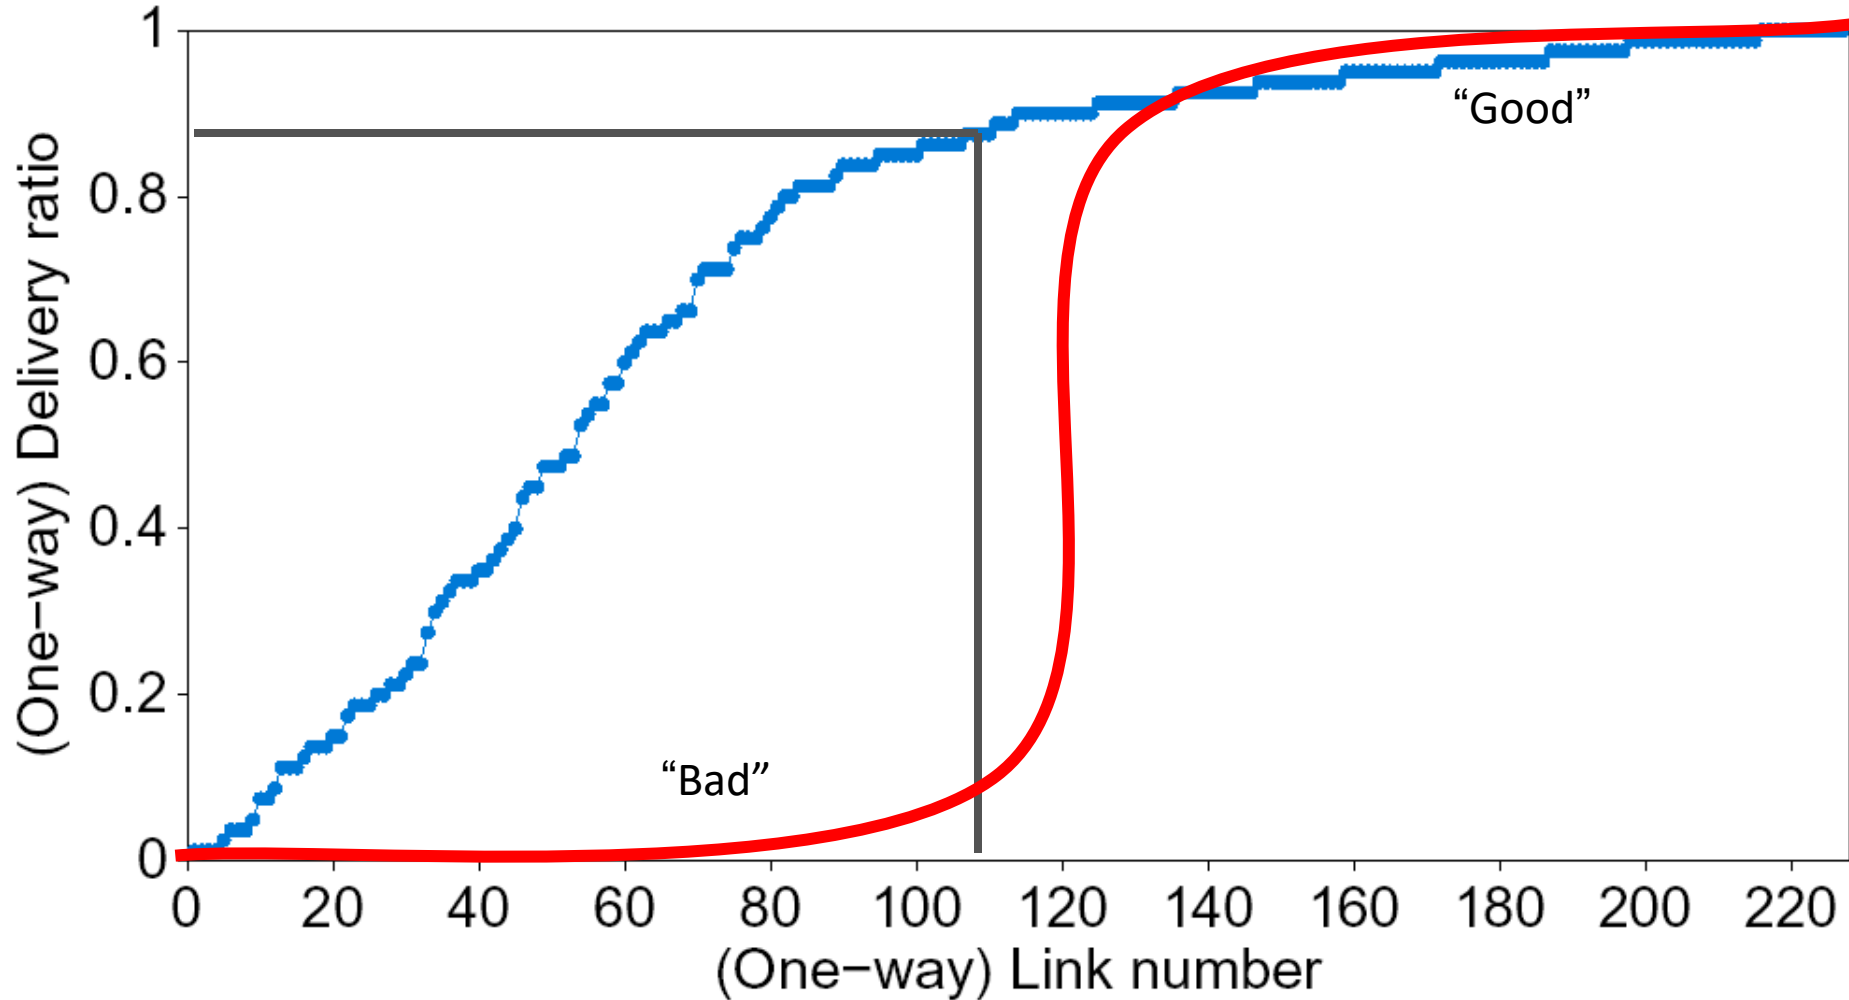

Smooth link distribution complicates link classification.

Challenge: links are lossy and asymmetric

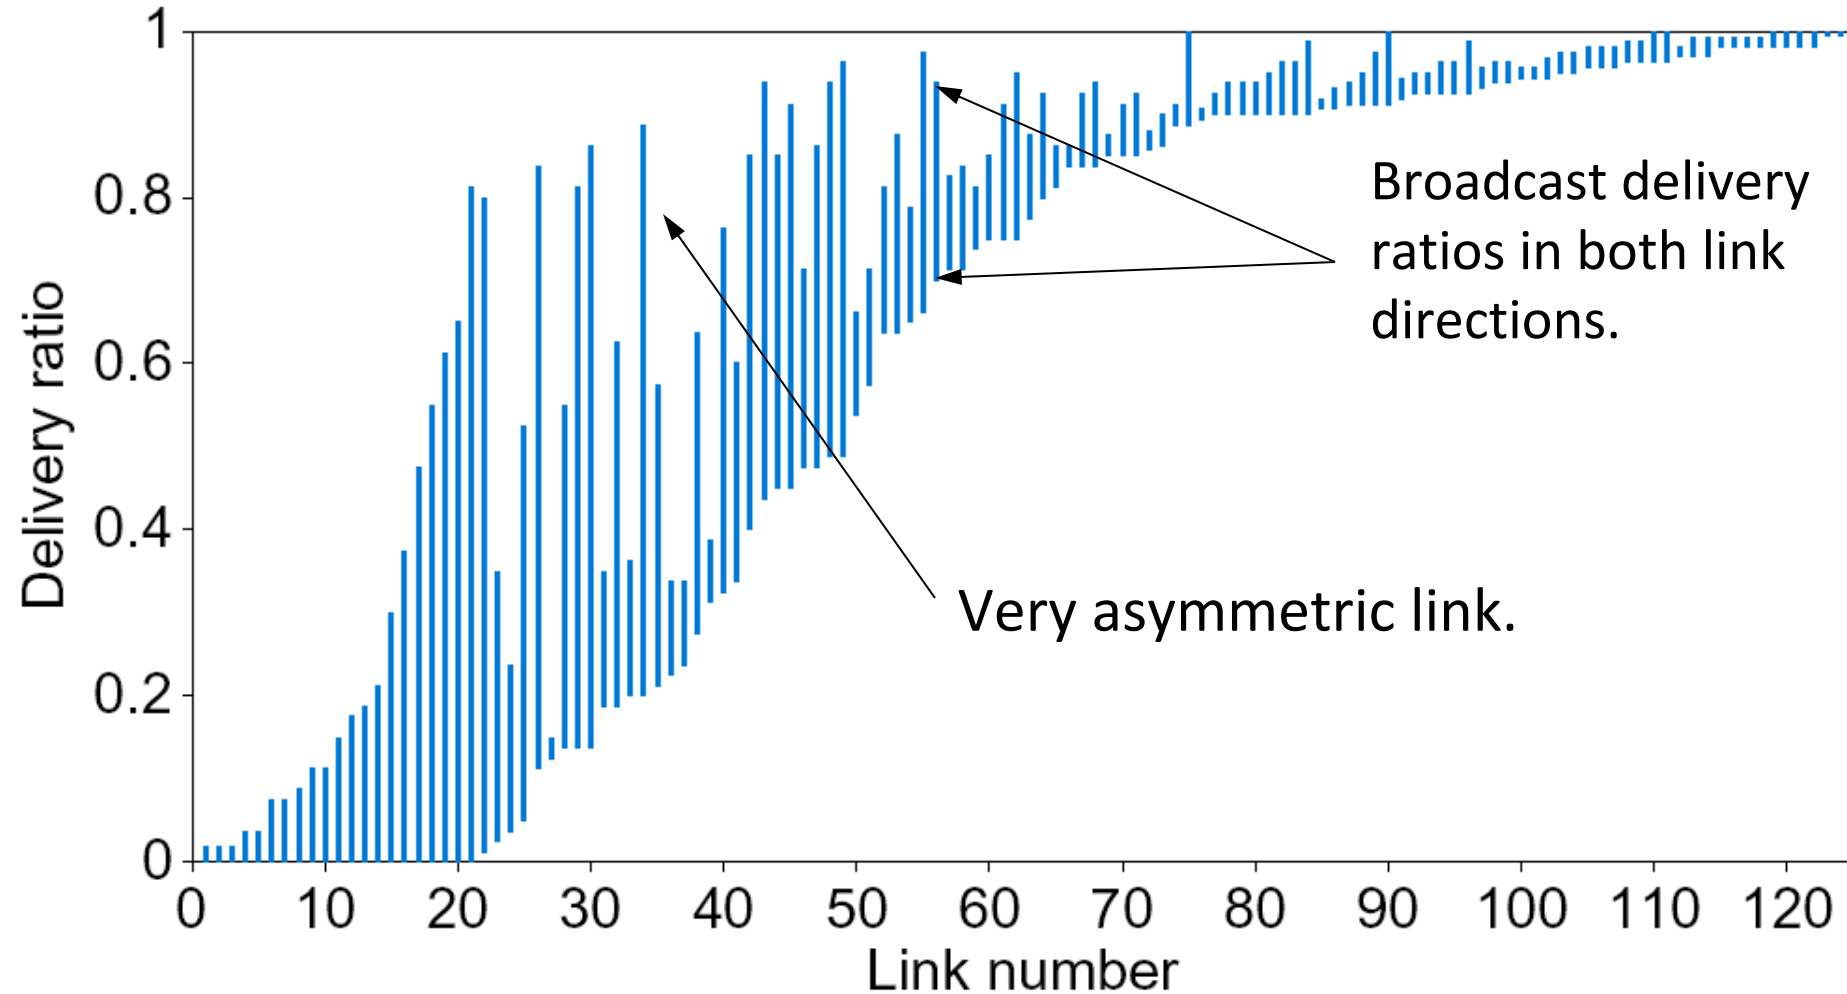


Different links have different loss rates

Further, the loss rate may be different in each direction

Approach 2:

Maximize bottleneck throughput

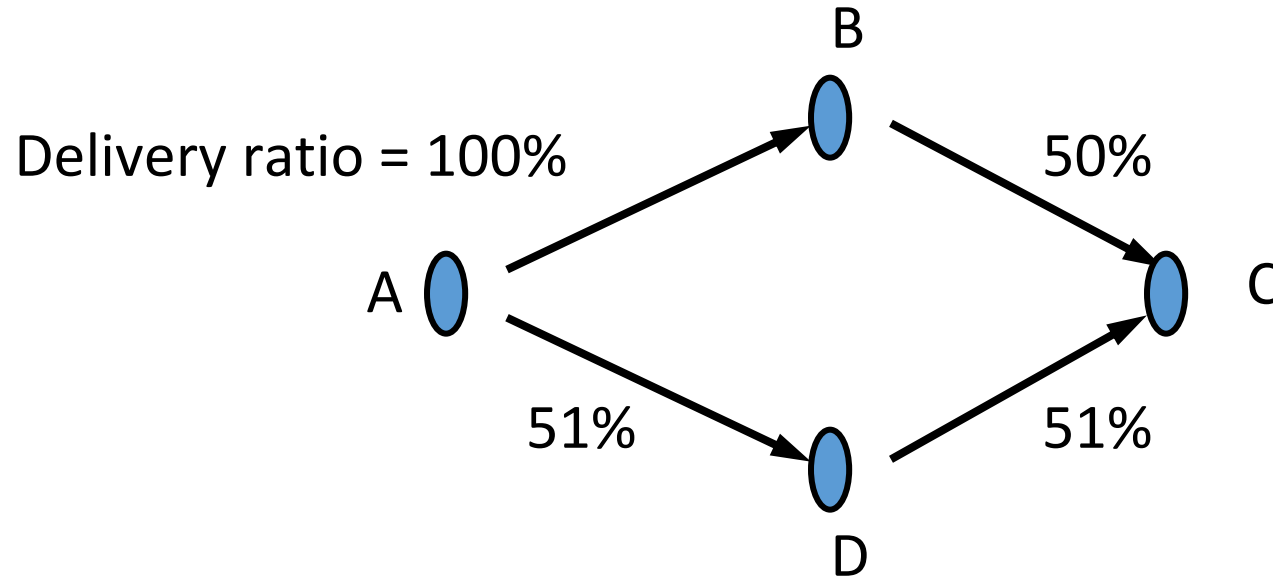


Bottleneck throughput: $\begin{cases} A-B-C = 50\% \\ A-D-C = \underline{51\%} \end{cases}$

Actual throughput: $\begin{cases} A-B-C : A \cancel{B} B A \cancel{B} B A \cancel{B} B = \underline{33\%} \\ A-D-C : \cancel{A} A \cancel{D} D \cancel{A} D \cancel{A} D = 25\% \end{cases}$

Pros? Cons?

Approach #3:

Maximize end-to-end delivery ratio

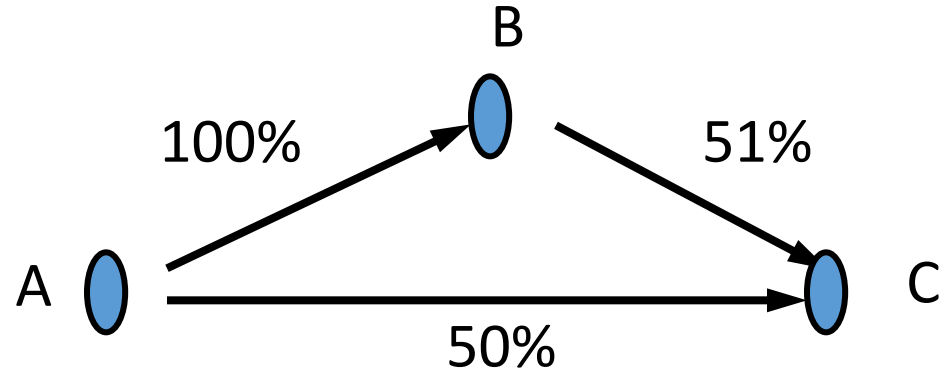

End-to-end delivery ratio: $\begin{cases} A-B-C = \underline{51\%} \\ A-C = 50\% \end{cases}$




Actual throughput: $\begin{cases} A-B-C : A \text{ * } B \text{ * } A \text{ * } B \text{ * } B = 33\% \\ A-C : \text{ * } A \text{ * } A \text{ * } A \text{ * } A = \underline{50\%} \end{cases}$

Pros? Cons?

Approach #4: Wireless routing metric: ETX

Minimize total transmissions per packet
(ETX, 'Expected Transmission Count')

Link throughput $\approx 1 / \text{Link ETX}$

<u>Delivery Ratio</u>		<u>Link ETX</u>	<u>Throughput</u>
100%		1	100%
50%		2	50%
33%		3	33%

Calculating Link ETX


- Assuming 802.11 link-layer acknowledgments (ACKs) and retransmissions:
- $P(\text{TX success}) = P(\text{Data success}) \times P(\text{ACK success})$
- $\text{Link ETX} = 1 / P(\text{TX success})$
 $= 1 / [P(\text{Data success}) \times P(\text{ACK success})]$
- Estimating link ETX:
 - $P(\text{Data success}) \approx \text{measured fwd delivery ratio } r_{\text{fwd}}$
 - $P(\text{ACK success}) \approx \text{measured rev delivery ratio } r_{\text{rev}}$
- $\text{Link ETX} \approx 1 / (r_{\text{fwd}} \times r_{\text{rev}})$

How can we measure delivery ratios?

- Each node broadcasts small link probes once per second
- Nodes remember probes received over past 10 seconds
- Reverse delivery ratios estimated as






$$r_{\text{rev}} \approx \text{pkts received} / \text{pkts sent}$$

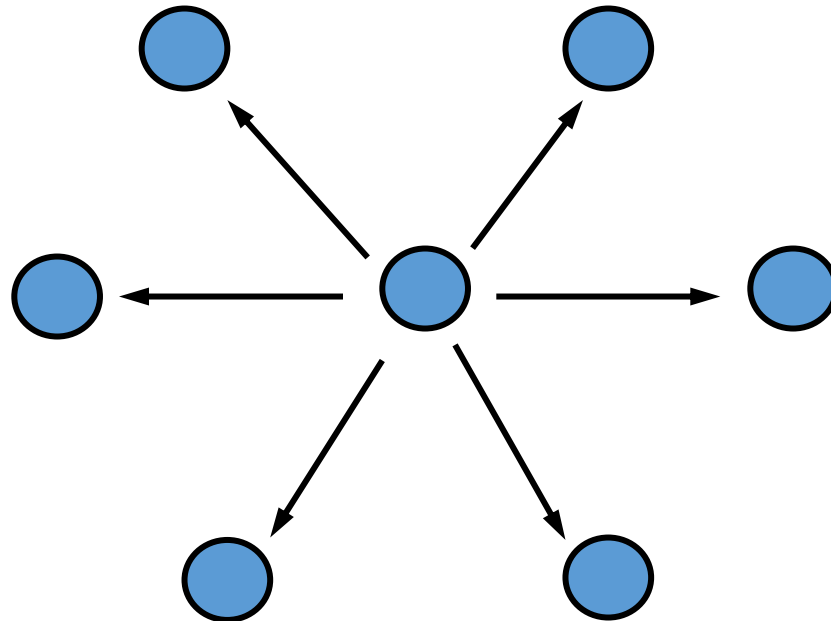- Forward delivery ratios obtained from neighbors (piggybacked on probes)



Route ETX

Route ETX = Sum of link ETXs

	<u>Route ETX</u>	<u>Throughput</u>
	1	100%
	2	50%
	2	50%
	3	33%
	5	20%

ETX Pros?


- ETX predicts throughput for short routes (1, 2, and 3 hops)
- ETX captures loss
- ETX captures asymmetry

ETX Caveats

- It is hard to measure link quality/loss
 - Changes as a function of load
 - Changes with time
- ETX ignores differences in bit-rate and packet size
- ETX ignores spatial re-use (i.e., assumes all links interfere)

How Can We Account to Different Bitrates?

(and different delivery ratios)

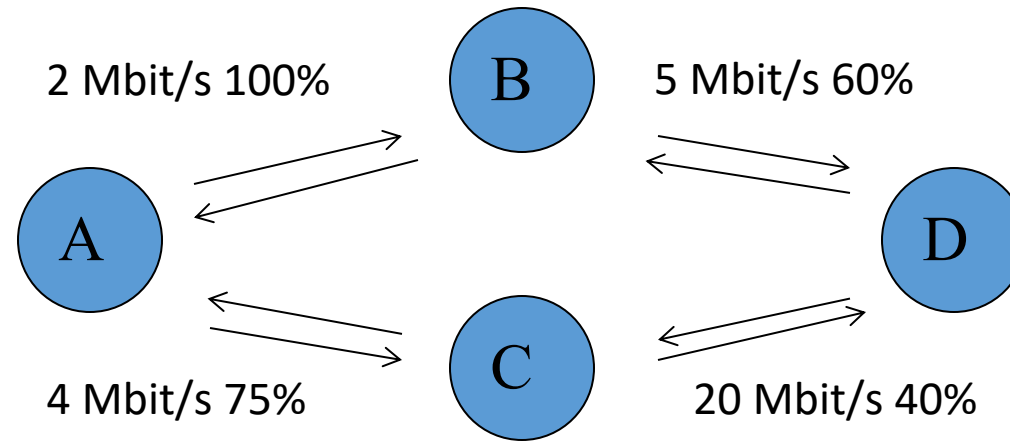

Idea: Take into account both the delivery rate and the **time** taken to transmit packet (i.e., time occupied on “air” by packet)


Assume pkt size = 20

$$ETT = ETX * (pkt_size / link-bit-rate)$$

$$ABD: 1 * 10 + 5/3 * 4 = 50/3$$

$$ACD: 4/3 * 5 + 2/5 * 1 = 55/6$$

MIT Roofnet

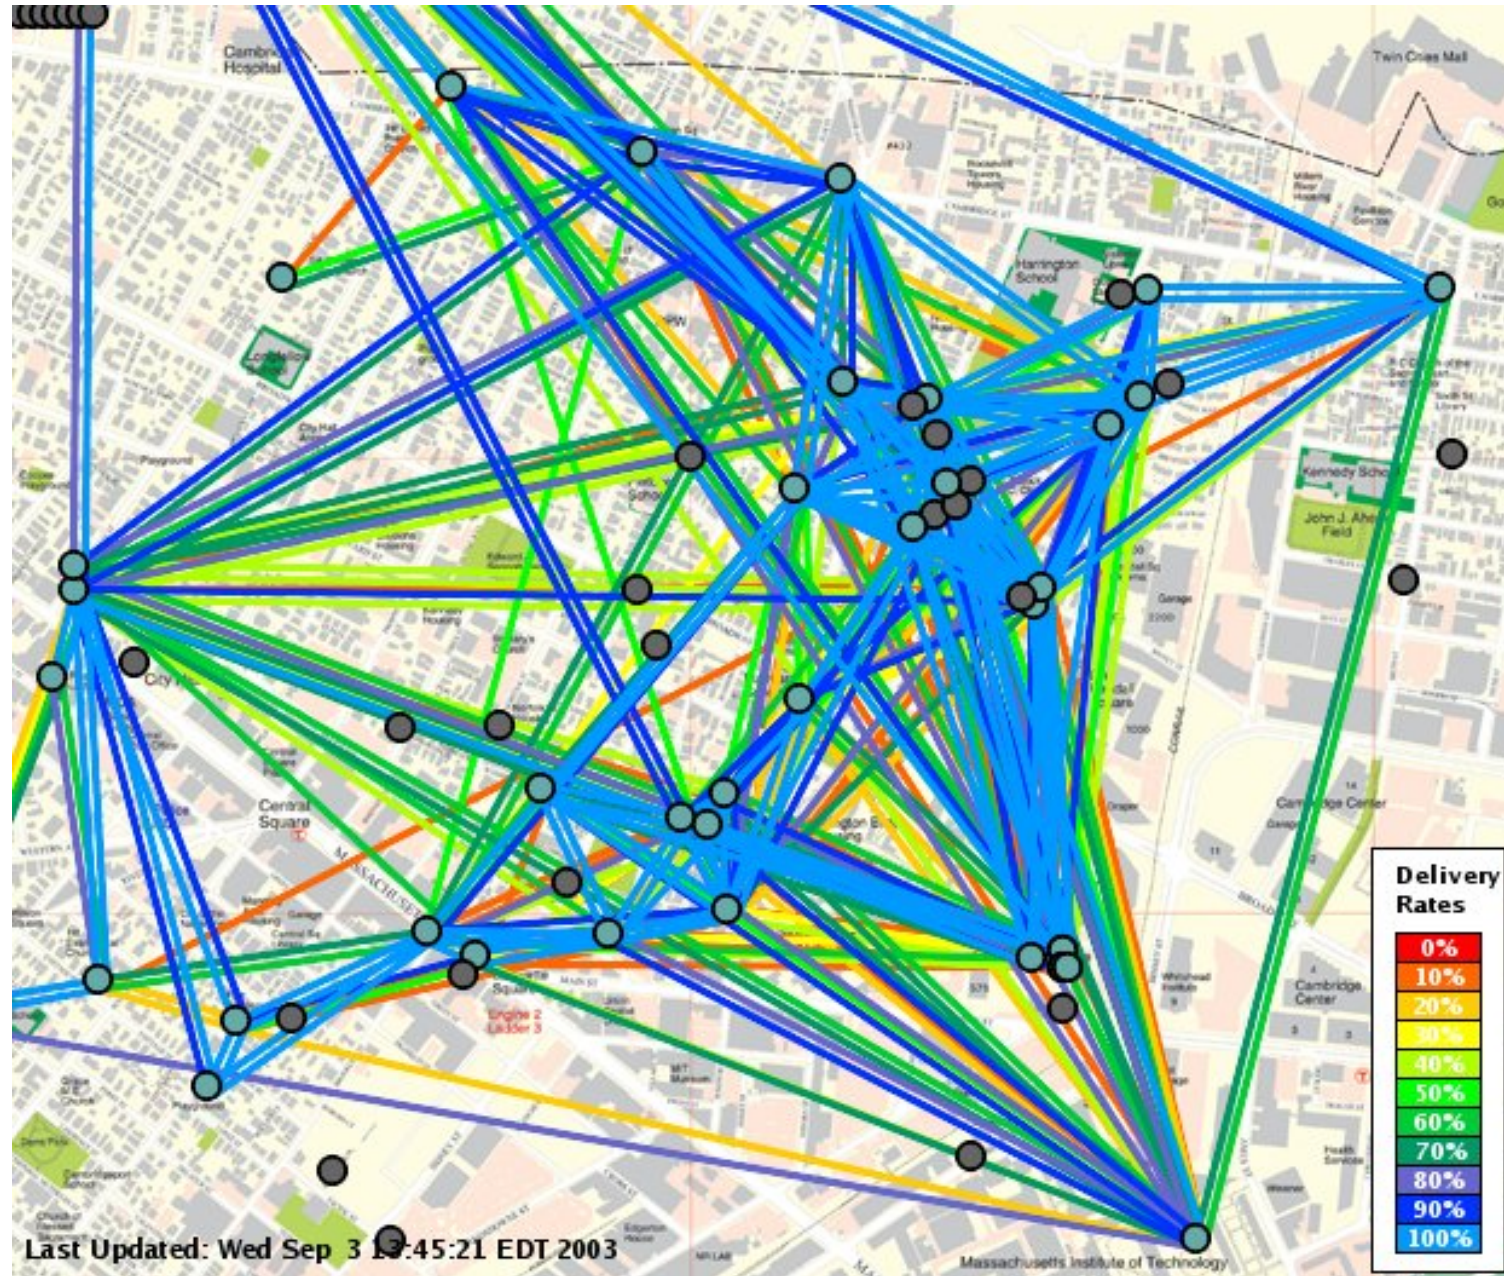

Why Wi-Fi Stinks—and How to Fix It

Neglected channels could add Wi-Fi capacity if router makers used them properly


By Terry Ngo

Global Market Insights
Insights to innovation.

Wireless Mesh Network Market revenue to hit USD 8 Bn by 2026, growing at around 15%: Global Market Insights, Inc.

Lebanon Protests: How To Communicate Securely in Case of a Network Disruption

📅 October 18, 2019 📖 News, Services

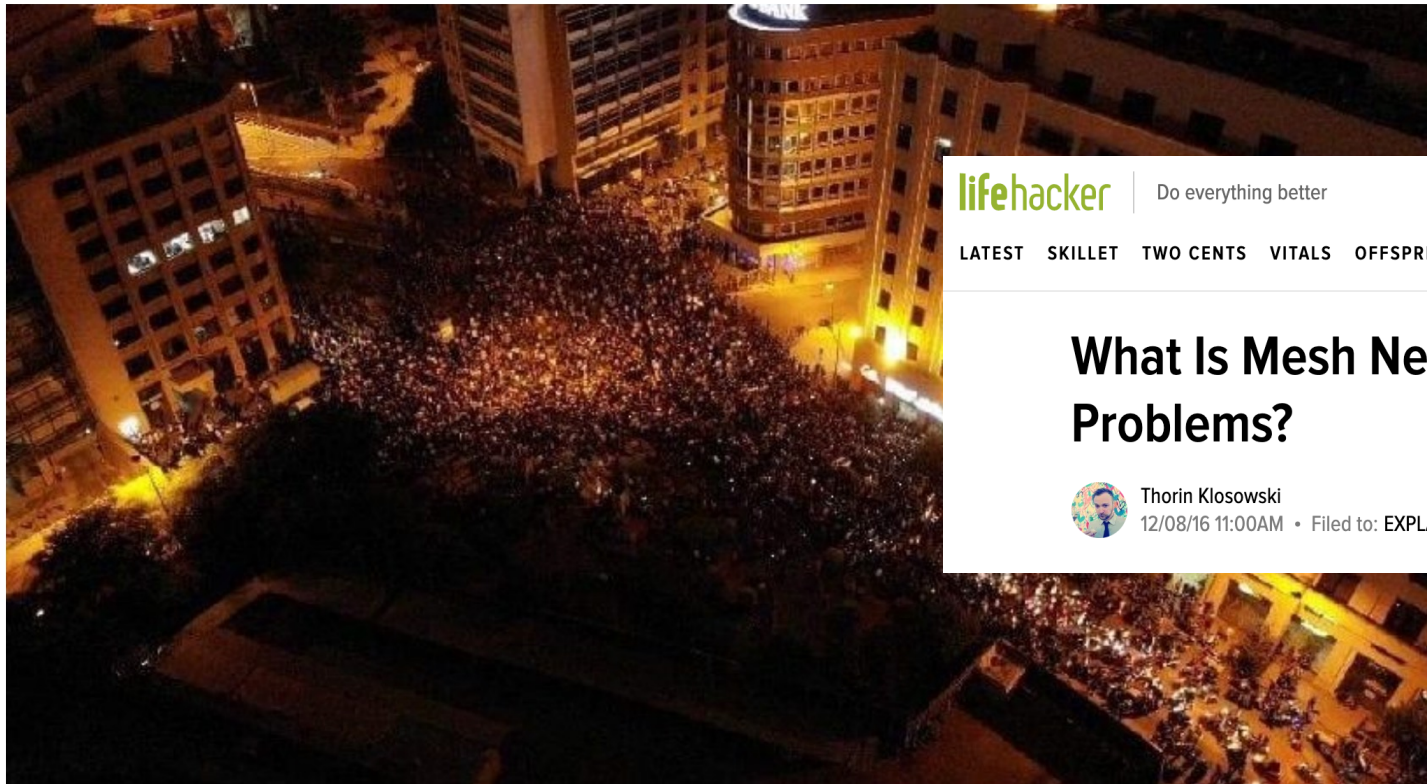

lifehacker | Do everything better



Subscribe



LATEST SKILLET TWO CENTS VITALS OFFSPRING THE UPGRADE APP DIRECTORY HOW I WORK VIDEO

What Is Mesh Networking and Will It Solve My Wi-Fi Problems?



Thorin Klosowski

12/08/16 11:00AM • Filed to: EXPLAINER ▾

🔥 203.1K

💬 69

🔖 6



Next class

- Monday Sep 25th.
- Batteryless Connectivity
 - Required: Caraoke (without section 8)
- Lab 1 is out; due on Oct 1st.
 - Location API
 - Power drain vs accuracy

