
DUROTECH

Waterproofing • Sealants • Adhesives

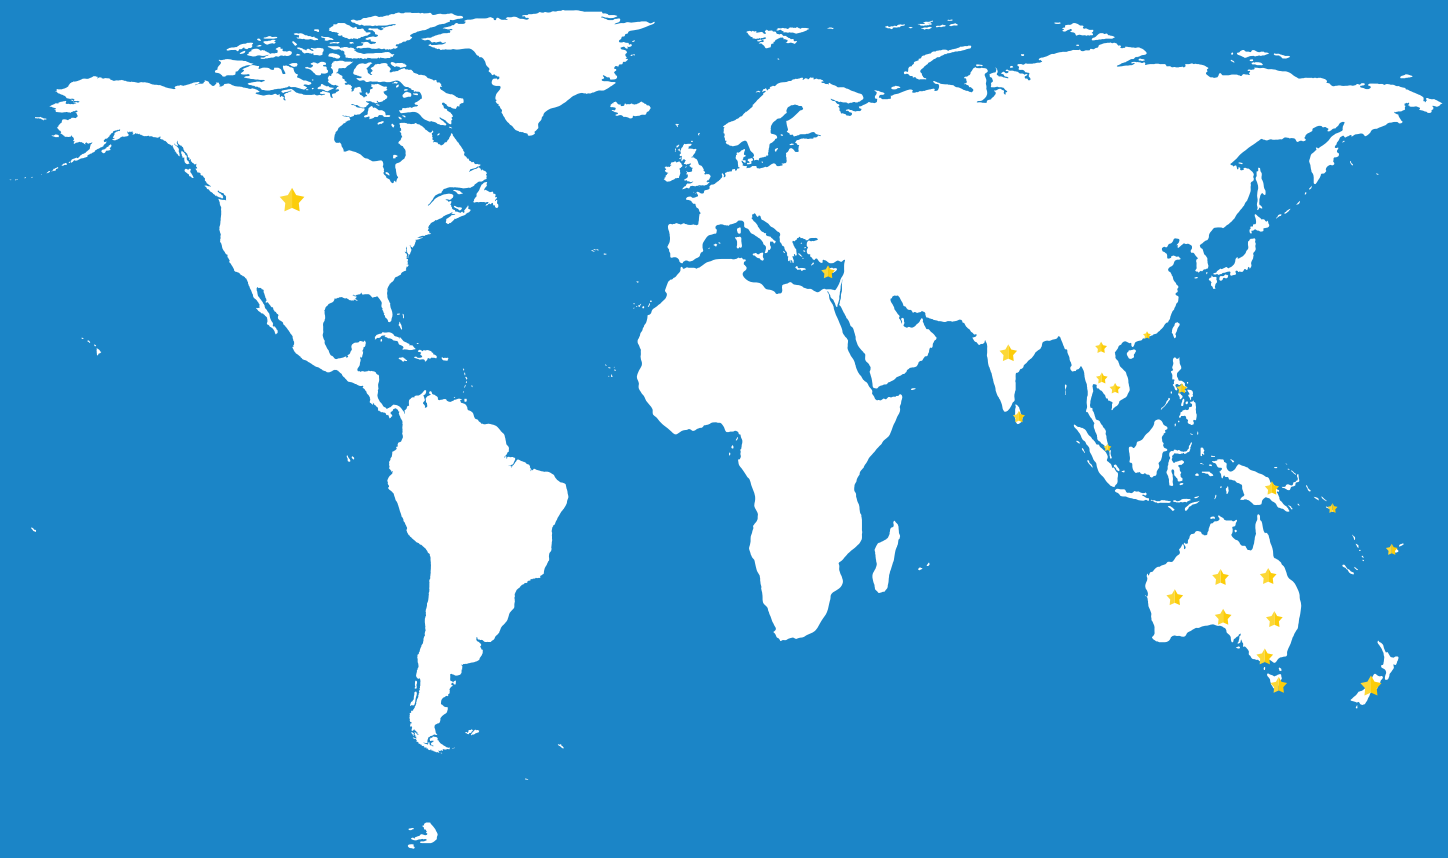

DUROTECH WATERPROOFING SYSTEMS

Made In Australia For Over 42 Years

www.durotechindustries.com.au



TABLE OF CONTENT

SYSTEM 1	Lift Pits	2
SYSTEM 2	Basement Waterproofing	3
SYSTEM 3	Retaining Walls	4
SYSTEM 4	Planter Box Waterproofing	5
SYSTEM 5	Podium Waterproofing	6
SYSTEM 6	Balcony/Decks	7
SYSTEM 7	Internal Wet Area Waterproofing	8
SYSTEM 8	External Facade Coatings	9
SYSTEM 9	Plant Room Waterproofing	10
SYSTEM 10	Water Tanks	11
SYSTEM 11	Ponds/ Water Features	12
SYSTEM 12	Roof Waterproofing Non Exposed	13
SYSTEM 13	Roof Waterproofing Exposed	14
SYSTEM 14	Epoxy Flooring System	15

Disclaimer : The information provided in this Durotech Waterproofing System brochure is correct at the time of printing (albeit is subject to change at any time) and is intended to give a simple description of the product and its capabilities. In practice, the substrate, intended surface to be treated and environmental conditions vary widely, making it essential for the user to determine the products suitability for a particular application and to ensure that the product is not used beyond its physical limitations. If in doubt contact the manufacturer. The product will perform as described herein provided it is applied in accordance with the manufacturer's instructions as stated in the manufacturers technical data sheet and provided that the building and installation is structurally sound and the application is carried out competently. Durotech terms and conditions of sale apply.

Lift Pits



Duroproof PU BLACK (System 1a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PU black

- Moisture curing
- Application by brush, spray, roller, squeegee
- +800 % Elongation
- Single component no mixing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums



Duroproof BLW (System 1b)

Water Based Bitumen Latex Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic BLW

- Single Component, Simple Application
- Waterbased, Environmentally Friendly
- Excellent Strength & Elongation
- Rapid Curing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes



Duroflex Tank (System 1c)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks



DuroTorch Peel n Stick (System 1d)

Self Adhesive Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch Peel n Stick

- Excellent Elongation
- High Tensile Strength
- Tear Resistant
- Suitable for Low Temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



DuroTorch APP (System 1e)

Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (non Exposed light traffic)





Basement Waterproofing



Duroproof PU BLACK (System 2a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PU black

- Moisture curing
- Application by brush, spray, roller, squeegee
- +800 % Elongation
- Single component no mixing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums



Duroproof BLW (System 2b)

Water Based Bitumen Latex Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic BLW

- Single Component, Simple Application
- Waterbased, Environmentally Friendly
- Excellent Strength & Elongation
- Rapid Curing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes



Duroflex Tank (System 2c)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks



DuroTorch Peel n Stick (System 2d)

Self Adhesive Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch Peel n Stick

- Excellent Elongation
- High Tensile Strength
- Tear Resistant
- Suitable for Low Temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



DuroTorch APP (System 2e)

Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (non Exposed light traffic)







Retaining Walls



Duroproof PU BLACK (System 3a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PU black

- Moisture curing
- Application by brush, spray, roller, squeegee
- +800 % Elongation
- Single component no mixing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums



Duroproof BLW (System 3b)

Water Based Bitumen Latex Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic BLW

- Single Component, Simple Application
- Waterbased, Environmentally Friendly
- Excellent Strength & Elongation
- Rapid Curing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes



Duroflex Tank (System 3c)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks



DuroTorch Peel n Stick (System 3d)

Self Adhesive Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch Peel n Stick

- Excellent Elongation
- High Tensile Strength
- Tear Resistant
- Suitable for Low Temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



DuroTorch APP (System 3e)


Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (non Exposed light traffic)

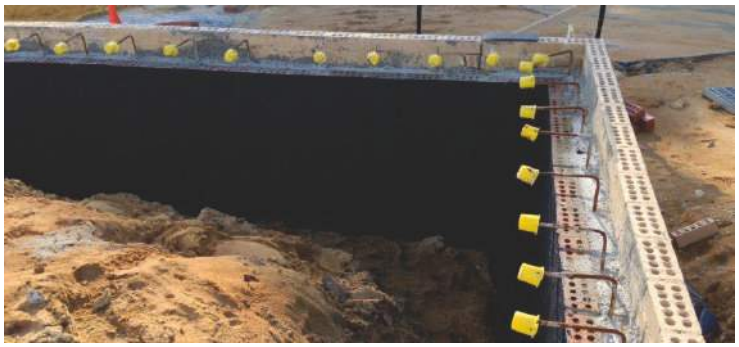



Planter Box Waterproofing



Duroproof PU BLACK (System 4a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PU black

- Moisture curing
- Application by brush, spray, roller, squeegee
- +800 % Elongation
- Single component no mixing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums



Duroproof BLW (System 4b)

Water Based Bitumen Latex Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic BLW

- Single Component, Simple Application
- Waterbased, Environmentally Friendly
- Excellent Strength & Elongation
- Rapid Curing

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes



Duroflex Tank (System 4c)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks



DuroTorch Peel n Stick (System 4d)


Self Adhesive Sheet Membrane System


Primer	Durotorch Bitumen Primer
Membrane	DuroTorch Peel n Stick

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops(non Exposed light traffic)

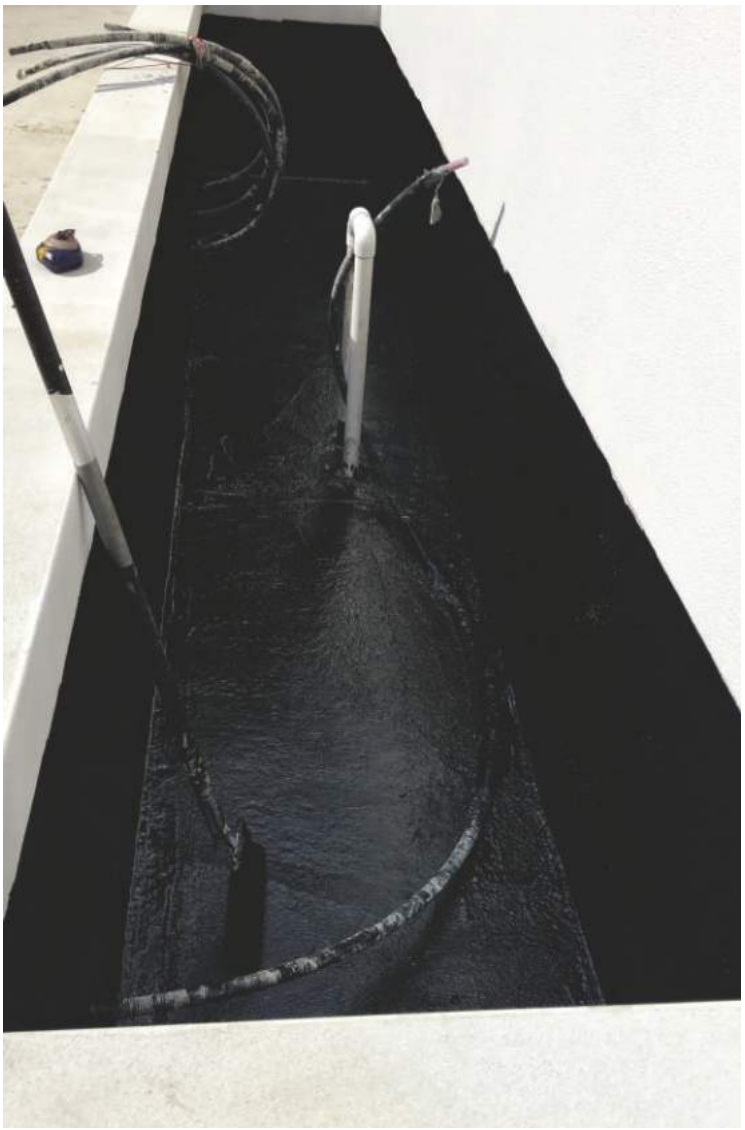

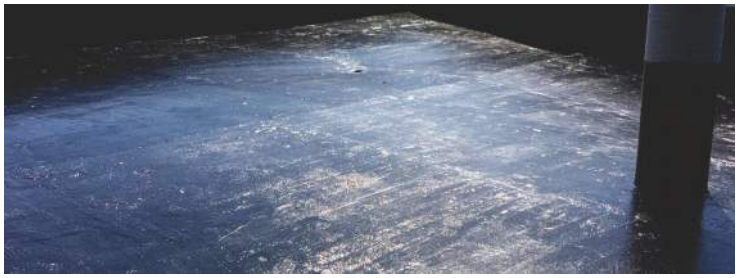

Podium Waterproofing



Duroproof PPM (System 5a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PPM

- Single component, easy to spread
- Class III - elongation as per AS/NZ 4858
- Excellent toughness
- Low odour, low VOC

Use Areas

- Internal Wet areas
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)





Duromastic P15 (System 5b)

Water Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic P15

- Fast drying Rapid Cure Technology
- Water-Based, Environmentally Friendly
- Excellent Strength & over 800% Elongation
- Single Component, Simple Application

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)





DuroTorch APP (System 5c)

Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (non Exposed light traffic)



Balcony/Decks



Duroproof NEP (System 6a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof NEP

- Single component
- Excellent water resistance
- Excellent Toughness
- + 600% Elongation

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



Duromastic P15 (System 6b)

Water Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic P15

- Fast drying Rapid Cure Technology
- Water-Based, Environmentally Friendly
- Excellent Strength & over 800% Elongation
- Single Component, Simple Application

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



Duromastic ACS2 (System 6c)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic ACS-2

- Water-Based, Environmentally Friendly
- Rapid Cure Membrane
- Economical Waterproofing Membrane
- Durable Fibre reinforced

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Exterior Facade walls



DuroTorch APP (System 6d)

Torch Applied Sheet Membrane System


Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



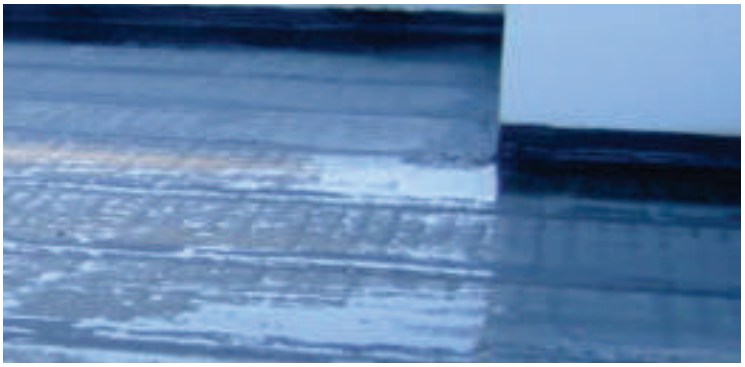



Internal Wet Area Waterproofing



Duroproof NEP (System 7a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof NEP

- Single component
- Excellent water resistance
- Excellent Toughness
- + 600% Elongation

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)





Duromastic P15 (System 7b)

Water Based Polyurethane Membrane

Joint Sealant	DuroSeal PU-25
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic P15

- Fast drying Rapid Cure Technology
- Water-Based, Environmentally Friendly
- Excellent Strength & over 800% Elongation
- Single Component, Simple Application

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



External facade and parapet exposed surfaces



Duromastic Duroarmor (System 8a)

Water Based Elastomeric Membrane

Primer	Hibuild Epoxy Primer
Membrane	DuroMastic P15

- Available in over 1000 Colours
- Excellent water resistance
- Low VOC
- + 300% Elongation

Use Areas

- Rooftops(Exposed to UV)
- Balconies
- Rooftops (Non exposed light traffic)
- Exterior Facade walls











Duromastic Durosolar (System 8a)

Solar Reflective Membrane Coating For Facades, Walls & Fascias

Primer	Hibuild Epoxy Primer
Membrane	Durosolar

- Water Based, Environmentally Friendly
- Light Foot Traffic Resistant
- Low Odour & Low VOC
- Available in Colours

Use Areas

- Concrete, brick, blockwork, render walls and facades, concrete roof tiles
- Bitumen roof top coating
- As a Solar Reflective colour topcoat for Duroroof, Duromastic AC & P15.



Plant Room Waterproofing



Duroproof PPM/ATC (System 9a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PPM
Top Coat	Duroproof TTC

- Single component, easy to spread
- Class III - elongation as per AS/NZ 4858
- Excellent toughness
- Low odour, low VOC

Use Areas

- Rooftops (Exposed to UV)
- Rooftops (Non exposed light traffic)



Duromastic AC non slip (System 9b)

Water Based Acrylic Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic AC non slip

- UV Stable
- Light Foot Traffic Resistant
- Water Based, Environmentally Friendly
- Low Odour & Low VOC

Use Areas

- Rooftops (Exposed to UV)
- Rooftops (Non exposed light traffic)
- Exterior Facade walls



Duropoxy wear MC (System 9c)

Solvent Less Epoxy Coating

Joint Sealant	Duropoxy Repair Compound
Primer	Self Priming
Membrane	Duropoxy wear MC

- Non-flammable, negligible odour and toxicity
- Resists mildew, mould and bacteria growth
- Withstands steam and chemical cleaning
- Long pot life and short touch-dry time.

Use Areas

- Plant room
- Garage
- Factory floor
- Car showroom floor







Water Tanks



Duroflex Tank (System 10a)


2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks

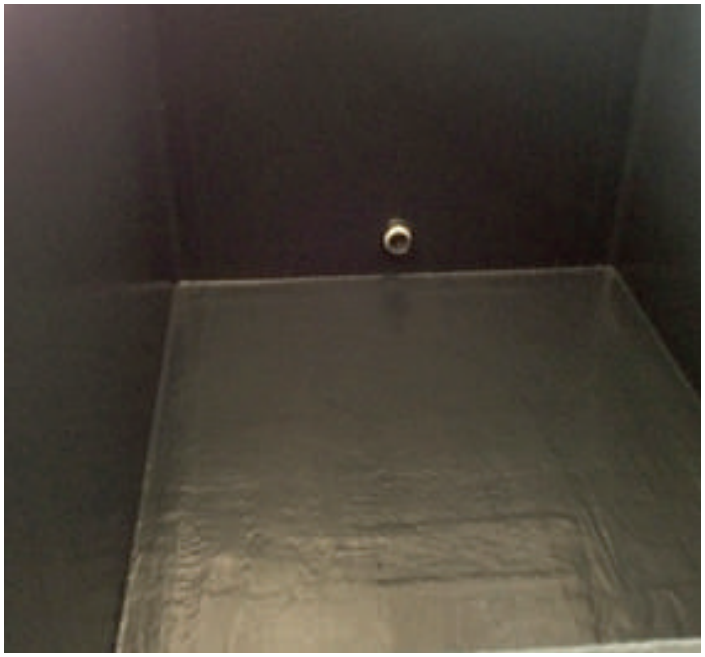





Ponds/ Water Features



Duroflex Tank (System 11a)

2 Part Flexible Cementitious Membrane

Joint Sealant	DuroElasto Tape
Primer	Self Priming
Membrane	DuroFlex Tank

- No primer required, bonds to damp surfaces
- Flexible with good elongation properties
- Can be applied on vertical and horizontal surfaces
- Suitable for immersed and underground areas

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- OSD Water Tanks





Duromastic Duropond (System 11b)

Water Based Polyurethane Membrane

Joint Sealant	Duroseal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic Duropond

- Single component, waterbased
- Excellent water resistance
- Low VOC
- + 600% Elongation

Use Areas

- OSD Water Tanks
- Water features
- Ponds
- Fountains & bird baths



Roof Waterproofing non exposed



Duroproof PPM (System 12a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PPM

- Single component, easy to spread
- Class III - elongation as per AS/NZ 4858
- Excellent toughness
- Low odour, low VOC

Use Areas

- Internal Wet areas
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



Duromastic P15 (System 12b)

Water Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic P15

- Fast drying Rapid Cure Technology
- Water-Based, Environmentally Friendly
- Excellent Strength & over 800% Elongation
- Single Component, Simple Application

Use Areas

- Internal Wet areas
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)



DuroTorch APP (System 12c)

Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)







Roof Waterproofing Exposed



Duroproof PPM/ATC (System 13a)

Solvent Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	Duroproof PPM
Top Coat	Duroproof ATC

- Single component, easy to spread
- Class III - elongation as per AS/NZ 4858
- Excellent toughness
- Low odour, low VOC

Use Areas

- Rooftops (Exposed to UV)
- Rooftops (Non exposed light traffic)



Duromastic Duraroof (System 13b)

Water Based Polyurethane Membrane

Joint Sealant	DuroSeal 25LM
Primer	Hibuild Epoxy Primer
Membrane	DuroMastic Duraroof

- Innovative Crack-bridging Technology
- Excellent Strength & Elongation
- Foot Traffic Resistant
- Water-Based, Environmentally Friendly

Use Areas

- Balconies
- Rooftops(Exposed to UV)
- Rooftops (Non exposed light traffic)
- Exterior Facade walls



DuroTorch APP / Durotorch Mineral (System 13c)

Torch Applied Sheet Membrane System

Primer	Durotorch Bitumen Primer
Membrane	DuroTorch APP
Top Coat	Durotorch Mineral

- Excellent elongation
- High tensile strength
- Tear resistant
- Suitable for low temperature

Use Areas

- Basement / Lift Pit Walls
- Retaining Walls & Planter Boxes
- Balconies
- Podiums
- Rooftops (Non exposed light traffic)







DUROTECH

Waterproofing • Sealants • Adhesives

EPOXY

FLOORING SYSTEMS







Epoxy Flooring Systems

DuroPoxy SLR 100

Epoxy Based Durable Top-Coat Coloured Floor Coating

Description:

DuroPoxy SLR100 is a solvent free, durable floor coating based on a hard wearing, two component epoxy resin system. The cured floor provides excellent resistance to chemical and mechanical damage. There is a semi-gloss surface finish for this product that is textured and durable. This product can be applied to a 400um profile, this can be achieved in two coats.

Features

- Kits - No onsite mixing errors
- 100% solvent free
- Extended resistance
- Bonds to damp surface
- Chemical resistant
- Non-flammable
- Can be coloured - enhance the solution for client needs.

Uses

- Workshops
- Garage floors
- Factory floors
- Warehouses
- Shop floors.

Component Properties

Property	Resin	Hardener
Appearance	Neutral Grey	Straw to amber colour liquid
Spcific gravity g/cm^3	1.64 ± 0.05	1.06 ± 0.05
Viscosity @ 25°C	4,000-8,000 cps	100 - 300 cps

Mixing and Curing Condition

Property	Resin / Hardener
Mix ratio by weight (resin / weight)	100/23
Solids Content	100%
Mixed specific gravity	1.57 gms/cm^3
Work Time (10L Kit)	20 minutes @ 25°C
Recoat Time	Less than 12 hours @ 25°C
Ready for foot traffic	24 - 48 hours @25°C
Ready for vehicular traffic	48 – 72 hours @ 25°C

Typical Physical Properties

Property	Method	Resin / Hardener
Hardness	AS/NZS 1683.15	63 Shore D
Tensile Strength	AS/NZS 1683.11	23 MPa
Compressive Strength	ASTM D1621-04	67 MPa
% Elongation	AS/NZS 1683.11	6%

Dry and Curing time for SLR100

Substrate Temperature	15°C	25°C	35°C
Re-coat, minimum (hours)	24	12	8
Re-coat, minimum (hours)	48	24	24
Cured ready for foot traffic (hours)	48	24	24
Cured ready for car traffic (hours)	96	48	48

Packaging and Colour Availability

Duropoxy SLR100 is supplied as a 10L Kit (7.3L Resin / 2.7L Hardener).

Storage

Duropoxy SLR100 stored in its original sealed containers for up to 12 months in controlled environment. Place out of direct sunlight at temperatures between 15-30°C.

Cleaning

Clean the tools and equipment with rags, then wipe off using a solvent such as xylene before the resin system hardens.

Epoxy Flooring Systems

Application

Surface Preparation: The surface must be clean, dry and free from loose particles, including dust, grease, coatings and curing compounds and other foreign matter. The substrate must be prepared by any way of degreasing, grinding or captive shot blasting to expose aggregate and provide a profile. Allow floor to dry if degreasing has been carried out.

DuroPoxy Primer 100 may be used to seal floor after cleaning or degreasing. Ensure floor is dry before applying the Duropoxy Primer 100.

Duropoxy Binder with aggregate (Durosand K5) may be used to level surface irregularities. For further information on aggregate quantities, please refer to Duropoxy Binder datasheet.

The compressive strength of substrates shall not be less than 23MPa. A minimum direct tensile pull off is 1.5 MPa. The moisture content of substrate shall not be higher than 8% throughout and the temperature of the substrate must be 3°C above the current dew point.

Fill surface irregularities such as cracks, honeycombs with DuroPoxy aggregate system. Protect walls and columns against flashes using masking tape and polyethylene sheet.

Mixing: Prior to mixing the temperature of the components must be between 10-30°C. All mixing should be done using a slow speed drill (300-600 rpm) and a spiral mixing paddle. Add the hardener to the resin and continue to mix for 3 minutes at 300- 600rpms.

Allow to stand for a minimum 5 minutes after stirring in cold weather (below 15°C or above 8°C). Ensure all the containers are empty before disposal. Allow to stand for 2 minutes at 25°C.

400um thickness can be achieved in two coats by applying and spreading with brush or roller...see coverage rates.

NOTE: Working time is approximately 20 minutes. This will vary depending on ambient conditions, quantity mixed and placed (see Dry and Curing times).

The following restrictions must be observed:

- Only apply the coating when the substrate temperature is at least 3°C above the dew point.
- Do not apply the coating if the substrate is below 5°C.
- Do not apply the coating if the substrate is wet or likely to become wet.
- Do not apply the coating if the weather is clearly deteriorating or unfavourable for application or curing
- Do not apply coating in strong wind conditions.

Colours:

Red Oxide




Safety Yellow



Koala Grey



Dark Grey



Light Grey



Neutral Grey



Estimating Coverage

The consumption will depend upon substrate condition or type. Apply to give a coverage of Xm² per litre a second prime coat may be required for porous substrate.

Recommended film thickness per coat (SLR100 is designed for 2 coats)

Film thickness and spread rate	Dry film thickness (um)	Wet film thickness (um)	Theoretical spread rate (Litres/m²) per coat
Minimum	125	125	6.6
Recommended	200	200	5
Maximum	300	300	3.3

E.g. Coverage at 150um is 6.6m2 per Litre per coat (2 coats required to give an approximate coverage of 3.3M2 at 300um thick).

HEALTH and SAFETY:

Please observe the precautionary notices displayed on container. Use under well ventilated conditions. Avoid skin contact. Spillage on the skin should be removed immediately with suitable cleanser, soap and water. Eyes should be well flushed with water and seek medical attention immediately.

For the full health and safety hazard information and how to safely handle and use the product, please make sure you refer to relevant MSDS.

Epoxy Flooring Systems

DuroPoxy SLR 100



DuroPoxy SLR100 is a solvent free, durable floor coating based on a hard wearing, two component epoxy resin system. Allow 14 day for green concrete to drive.

Features

- Kits – no onsite mixing errors
- 100% Solvent Free
- Extended working time
- Chemical resistance
- Bonds to damp surface upto max. 5% - 6%
- Chemical resistant
- Non-flammable
- Moisture seal
- Can be coloured – enhance the solution for client needs

Use Areas

- Workshops
- Garage floors
- Factory floor
- Warehouses
- Shop floors

DuroPoxy SLT 2000



DuroPoxy SLT 2000 is a solvent free, durable floor coating based on a hard wearing, two component epoxy resin system.

Features

- Kits – no onsite mixing errors
- 100% solvent free
- Extended working time
- Chemical resistance
- Bonds to damp surface
- Chemical resistant
- Non-flammable
- Can be coloured – enhance the solution for client needs

Use Areas

- Workshops
- Garage floors
- Factory floor
- Warehouses
- Shop floors

Can be applied 2000 microns in one coat

Epoxy Flooring Systems

DUROPOXY PRIMER 100



DuroPoxy Primer 100 is a solvent free, non pigmented, two component epoxy based primer for Durotech self leveling epoxy flooring systems.

Features

- High adhesive strength - creates an extremely good bond to concrete substrates and aggregates
- Lower viscosity
- Excellent cure rate low temperatures
- Chemical resistance
- Excellent adhesion to dry, damp and or dense surfaces
- Multi-purpose epoxy primer
- Non-flammable , low VOC content

Use Areas

- Primer for dense concrete
- Mortar
- Screed
- Primer for trafficable epoxy systems
- Primer for polyurethane membranes
- Primer for damp substrates

DuroPoxy Binder



DuroPoxy Binder is an excellent product that is truly versatile. It is truly good technology ready for saving cost and creating leverage in your current based markets.


Features

- One product - creates many solutions
- 100% Solvent Free
- Low temperature cure
- Extended working time
- Chemical resistance
- Excellent adhesion to damp or dry concrete
- Chemical resistant
- Excellent mechanical strength
- Extend time and suitable for aggregate mixture

Use Areas


- Repair and structural bonding of new to old concrete
- Repair of cracks in old concrete floors
- Grouts for bolts and support in concrete
- Coving applications

Epoxy Floor Project Image

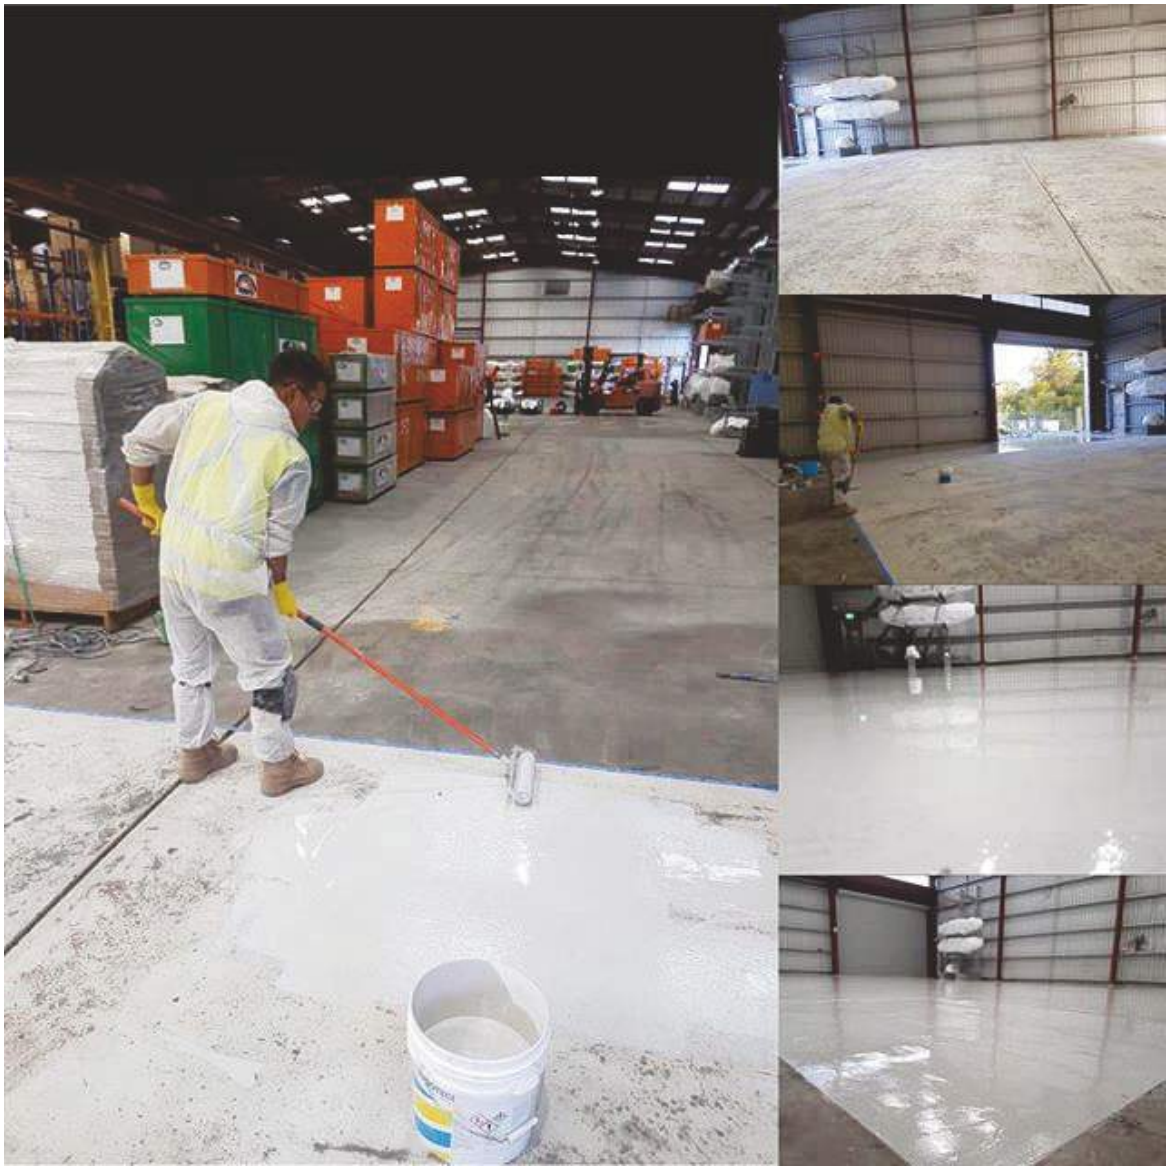





DUROFLAKE



DUROFLAKE - Black Marble



DUROFLAKE - Richmond Grey


DUROFLAKE - Black Marble Large


DUROFLAKE - Black Marble Small



DUROFLAKE - Richmond Marble Large



DUROFLAKE - Richmond Marble Small


DUROFLAKE - Black Granite


DUROFLAKE - Grey Granite


DUROFLAKE - Moonlite Rated



DUROFLAKE - Storm



DUROFLAKE - Ash Grey Large


DUROFLAKE - Ash Grey Small


DUROFLAKE - Steel Large


DUROFLAKE - Steel Small


DUROFLAKE - Pewter


DUROFLAKE - Volcaniv Ash

CONCEPT OF EPOXY FLOORING

Epoxy is a term that's come to represent a class of materials and the act of using those materials. Epoxy "systems" are based on a combination of resins and hardeners. When mixed together, the resin and hardener chemically react to form a rigid plastic material. The final material is strong, durable, resistant, and bonds extremely well to most base layers. Epoxy floors are so strong that they're often used in heavy traffic areas such as industrial environments, hospitals, or sports facilities. If you've ever considered an easy-to-maintain, industrial-grade flooring option, we bet there's an epoxy solution for you! At Performance Industrial, we offer over 5+ different epoxy and industrial flooring systems including Self-Leveling Epoxy Floors, Epoxy Mortar Floors and Epoxy Flake Floors. Epoxy is a unique solution because it's not only incredibly practical, but the materials used in it make it flexible for almost endless applications. Whether you need to make a beautiful entrance to your hotel lobby, or create a fire-proof warehouse floor, there's an epoxy system for you.



DUROTECH
Waterproofing • Sealants • Adhesives

Our Project Pictures



ACT Womens & Children's Hospital


Belmore Park Substation


Kurnell Substation


Rail Corp


Revesby Workers Club

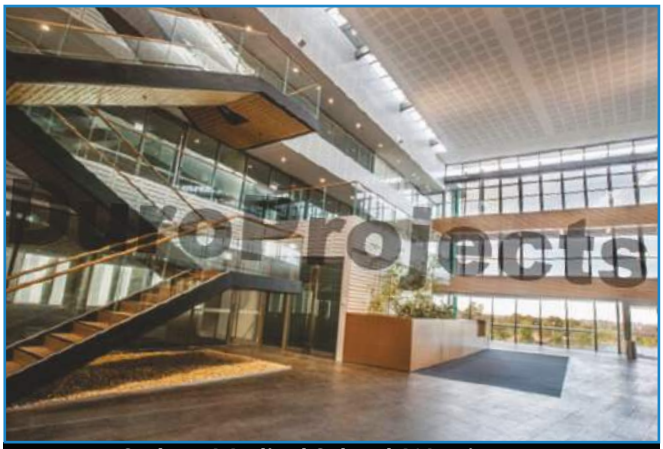
Sydney Medical School, Werrington

DUROTECH
Waterproofing • Sealants • Adhesives

Our Project Pictures


Global Switch (400 Harris St, Ultimo)


Queenwood School for Girls, Mosman



University of Wollongong – Early Start Facility



University of Wollongong – Early Start Facility


Westmead Millennium Institute (Westmead Hospital)


University of Western Sydney

DUROTECH

Waterproofing • Sealants • Adhesives

AUSTRALIAN Technology

SINCE 1977 Trialled • Tested • Approved


Durotech Product Project Photos









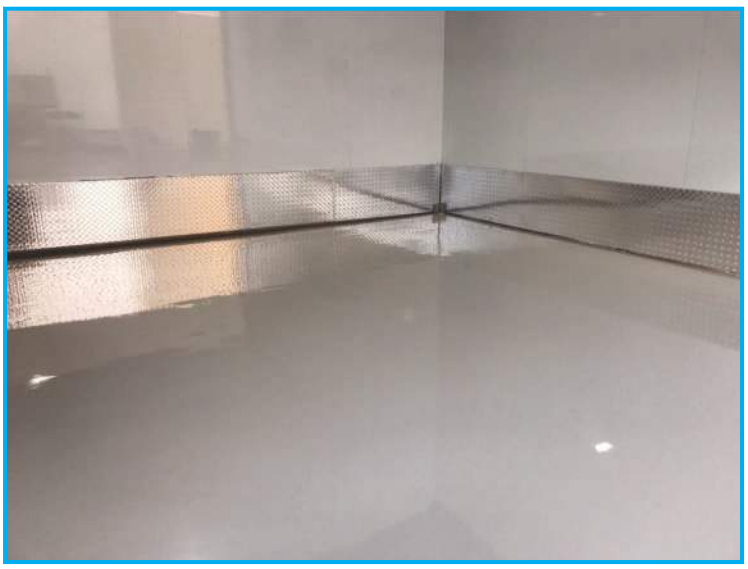

DUROTECH

Waterproofing • Sealants • Adhesives

Durotech Product Project Photos













DUROTECH

Waterproofing • Sealants • Adhesives

CASE STUDY

The Tallest Residential Tower In Western Sydney - One Australia Avenue



- **PROJECT**
  Sydney, NSW, Australia
- **PROJECT COMPLETION DATE**
  February 2015
- **DEVELOPER**
  Parkview

PROJECT SPECIFICATIONS

Australia Avenue Olympic village is one of the most prestigious premium buildings in the Sydney Homebush area. Spanning over 2 towers featuring 360 views in Syndey as well as an impressive world class design and beautiful city and bridge views.

THE DUROSYSTEM PRODUCT RANGE

The tallest residential tower in western Sydney – at 30 floor high – is to be known as One Australia Avenue and is located in Sydney Olympic Park.

The elliptical glass-walled building will have bronze-coloured bands wrapped around its façade and will be surrounded by 430-hecatres of parklands.

Supported, tested and backed by a team of specialist local experts with a combined 40 years of Australia market experience, Durotech was used across a number of applications.



- Water Tanks
- Lift Pits
- Planter Boxes
- Internal Wet Areas
- Plant Rooms
- Balconies
- Podiums
- Roof Tops



With sustainability now the focus of many Tier One construction projects, Durotechs ECO friendly low VOC and green building products proved to be a high-quality environmentally friendly alternative to other waterproofing solutions on the market.

DUROTECH
Waterproofing • Sealants • Adhesives

CASE STUDY

ALTITUDE

Parramatta's Tallest Riverfront Residential Tower

330 Church Street Parramatta NSW 2150



- **PROJECT**
  Sydney, NSW, Australia
- **PROJECT COMPLETION DATE**
  February 2017
- **DEVELOPER**
  Meriton

PROJECT SPECIFICATIONS

Altitude rises over 170m high with 54 levels of luxury apartment living, spectacular views and an unrivalled riverfront location. Live in the heart of the cultural district, surrounded by dining, sporting and outdoor options. Experience the ultimate height of living at Altitude apartments, and enjoy the luxurious fixtures and finishes, designed by award-winning Tony Caro architects.



THE DUROSYSTEM PRODUCT RANGE

Products Used

- Duromix Hibuild WBE Epoxy Primer
- Duroproof PPM
- Duromastic P15
- Duroseal 25LM

Use Areas

- Planter Boxes
- Internal Wet Areas
- Plant Rooms
- Balconies





DUROTECH
Waterproofing • Sealants • Adhesives

DuroToll

Duro Original Equipment Manufacturer

DuroToll is a specialist manufacturer providing private label, OEM and toll manufacturing services to the construction, trade and citil industries throughout the world with a primary focus on manufacturing innovative solvent free, solvent less and solvent based technologies.

By having multiple technologies in-house DuroToll is able to cater for a wide end to end range of waterproofing membranes, adhesives, protective coatings and sealing products.

DuroToll has a massive database of technologies after being catering for these markets for 40 years. In return is able to offer unparallel complete systems to their clients. With the state of the art facility with local manufacturing and technical support.

DuroToll is unmatched and continues to gain a stronger foot hold in the market place. Offering both bulk finished products and small goods remain DuroToll strength. DuroToll has the ability to pack from 1L to 1000L IBC drums. After 40 years DuroToll has and is the preferred option for clients in 2017.



DUROTECH
Waterproofing • Sealants • Adhesives

The DuroLab

With the new age of a fast pace world, it's more important than ever to be able to stay one step ahead of the market. It's extremely important to make sure that when deciding which technologies, you are choosing to use on your next project when you are partnering with the right people. At Durotech, we make it our mission to be at the front when choosing construction chemical products andsolutions.

How do we stay at the front?

After establishing in 1977 Durotech is now just over 40 years old making Durotech one of the Original Australian Made and Owned manufactures of construction chemicals. Durotech now 40 years later has cemented themselfs in the market as the most powerful Australian MADE and Australian OWNED companies with 40 years comes a lot of history, evidence and facts that Durotech does not only have some of the highest quality products it has the most innovative products backed by an extremely well experienced and educated team off technical chemists and engineers. After 40 years Durotech has proven that its products have been designed and have latest some of the harshest conditions in the world.... The Australian Sun. By manufacturing locally in Sydney Australia we are able to support out customers with local support and fast response times.

In today market the environment comes first. At Durotech we realise this and we ensure that we keep it that way. By utalising the lastest research techniques Durotech Laboratory technical team is able to develop a range of low VOC products and ULTRA low VOC products making these products not only safe for Australian conditions but being safe for global conditions as well.

While Durotech has its own testing laboratory, the Durotech range has also been externally tested as low VOC by an independent, nationally accredited Firm. by doing this Durotech has become the most environmental construction chemical supplier in Australia.

At Durotech 40 years ago DuroLab was establishing for one main purpose to support and show our responsibility to our customers and our country. Making QUALITY products was and still is our priority and continually investing in the backbone of our company. DuroLab is where it all started and it where it will take us into the future.

Making Sure We Meet The Most Up to Date Standards

Our State of the Art Laboratory is just one piece of the puzzle. The other part is making sure that we comply with all the latest and most upto date Australian standards. Being Australian compliant is extremely strenuous and tough standard to comply to but with our state of the art testing facility and highly trained technical team, our products pass with flying colours:

Some of the Australian Standards we test to:

- AS4654.1 - Waterproofing Membrane Systems for External above ground use – materials
- AS4858 – Wet Area Membranes
- AS4020 – Products for use in contact with Drinking Water


Some of the Test We perform:

- Abrasion Resistance	- Heat Ageing
- Bond Strength	- Temperature Resistance
- Cylic Movement	- Ultraviolet Resistance
- Dimensional Stability	- Tensile Strength
- Elongation at Break	- Thickness
- Field Seam Strength	- Durability
- Negative pressure rating	- Water Vapour Transmission Rate

Durotech is very clear on its quality standards if the product don't pass we dont sell it. Qaulity first.

DUROTECH
Waterproofing • Sealants • Adhesives

GET READY TO SEE SOMETHING AWESOME.

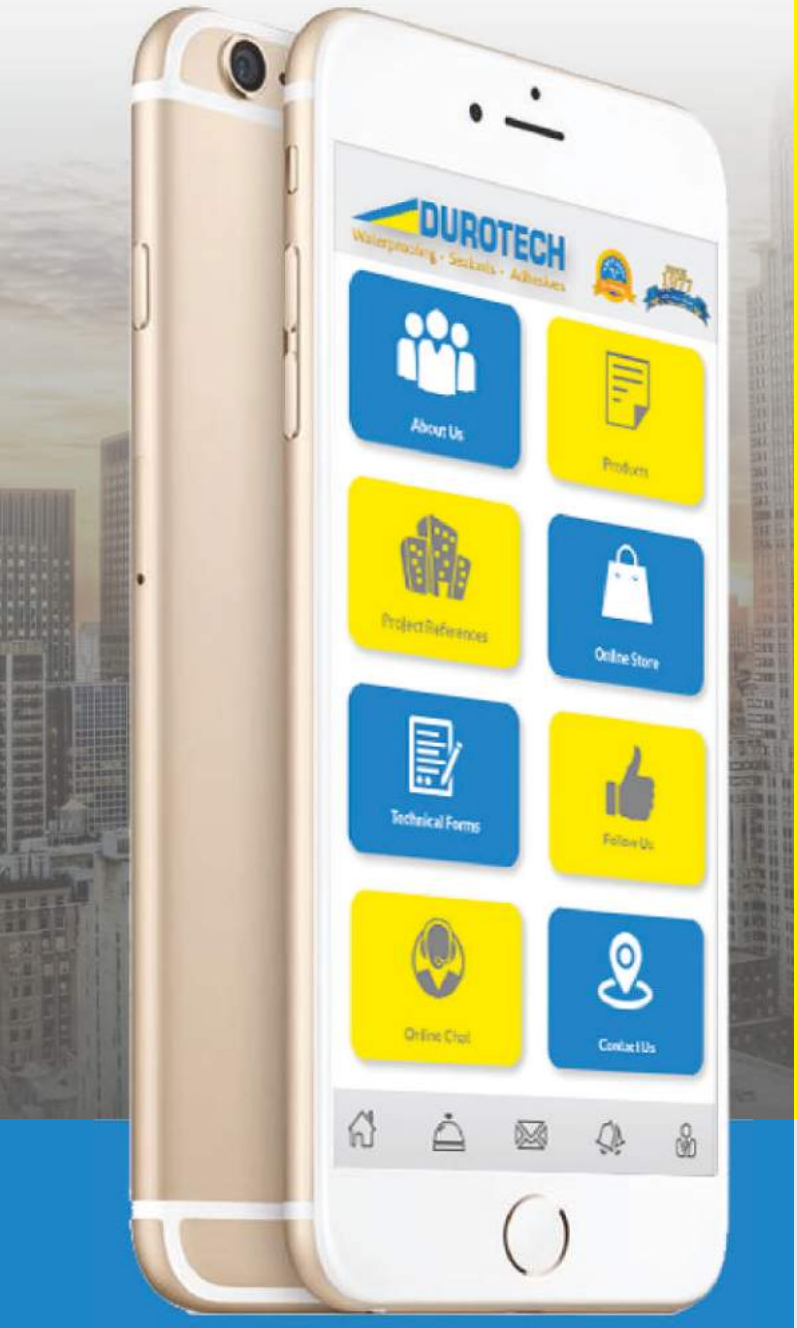

+61 2 9603 1177
1300 791 177
+61 2 9475 5059

www.durotechindustries.com.au

Be always up to date

DuroAPP industry first innovation waterproofing sealant and adhesive smart APP

1 New Products

Stay up to date with all the latest Durotech products and projects.

2 Technical Support

Get quick access to Data sheets and MSDS

3 Project Leads

Sign up and get FREE project leads sent straight to your mobile

4 Quick Access

Use our new Quick scan QR code to get information on any Durotech product


If you don't have our app just scan QR

Download on the App Store
GET IT ON Google Play

Follow us @:

Shop Online

DUROTECH
Waterproofing • Sealants • Adhesives

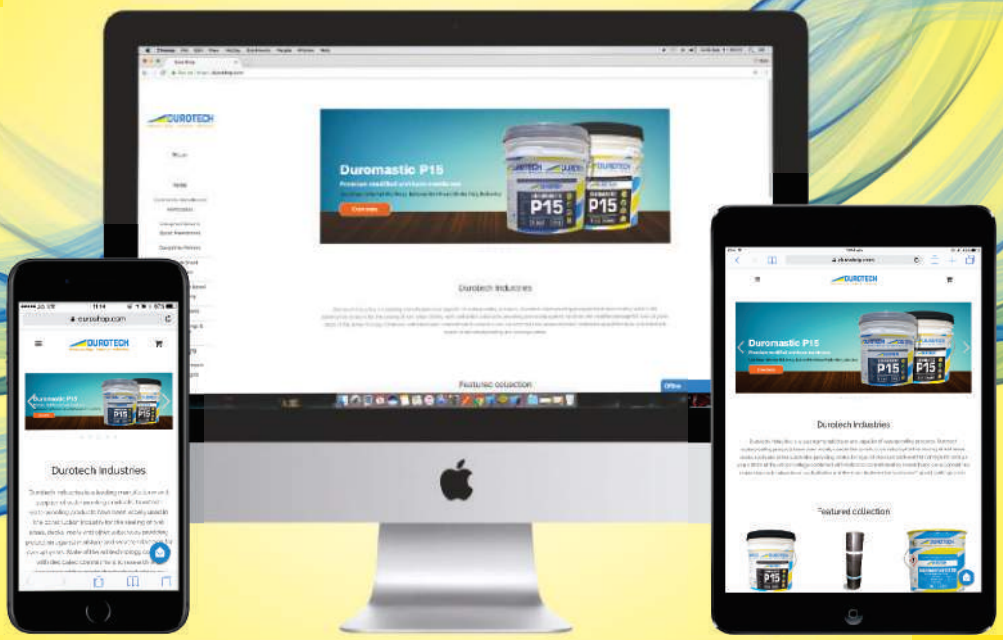

DUROTECH Launches its new Online store, we want our solution driven innovative products right into our customers hands.

Why DUROTECH ?

1. Innovative Products
2. High quality locally made
3. Online Customer Support
4. Australian made Australian warranties
5. 40 Years Australian Made
6. Compatible full systems

Follow us @:

PROUDLY AUSTRALIAN MADE



AUSTRALIAN Technology

Made In Australia For Over 42 Years



DUROTECH
Waterproofing • Sealants • Adhesives

Durotech Industries

+61 2 9603 1177
1300 791 177
+61 2 9475 5059
sales@durotechindustries.com.au
www.durotechindustries.com.au

Follow us @: