DUROTECH

Waterproofing • Sealants • Adhesives

Made In Australia For Over 40 Years





Did you KNOW?

Waterproofing is generally approximately 1% of a total construction cost.

Unfortunately it is the cause of approximately 80% of building complaints.



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Who is DUROTECH and What we Believe



Durotech Industries is a leading manufacturer and supplier of waterproofing, sealants and adhesive technologies. Durotech Systems products have been widely used in the construction industry for the sealing and coating of Both residential, commercial and industrial buildings for over 40years.

At Durotech we don’t believe that one product can do it all but we do belive a Durotech System can.

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

What services do we provide?

- Site visits
- Local supply
- Qualified waterproofing installers
- Specification & Design Services
- Onsite and Inhouse QA and Technical Support
- Australian manufacturing for over 40 years
- Upto 20 years warranty

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Product Systems

- Waterproofing Membrane Systems
- Sealants
- Epoxy Flooring
- Sheet membranes
- Spray systems

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

NATIONAL NATSPEC APPROVED PRODUCT PARTNER



Get access to the latest national specifications for all your local and national projects

Other affiliate partners:-

MASTER BUILDERS ASSOCIATION MEMBER
MASTER BUILDER, BETTER BUILDER


HIA you're in good hands
MEMBER

AIW Australian Institute of Waterproofing

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Premium Liquid Applied Waterproofing Systems

- Liquid waterproofing aims to create a joint less, continuous thick waterproofing membrane by the application of a liquid resin that cures (gets dry) directly over the surface to be protected.

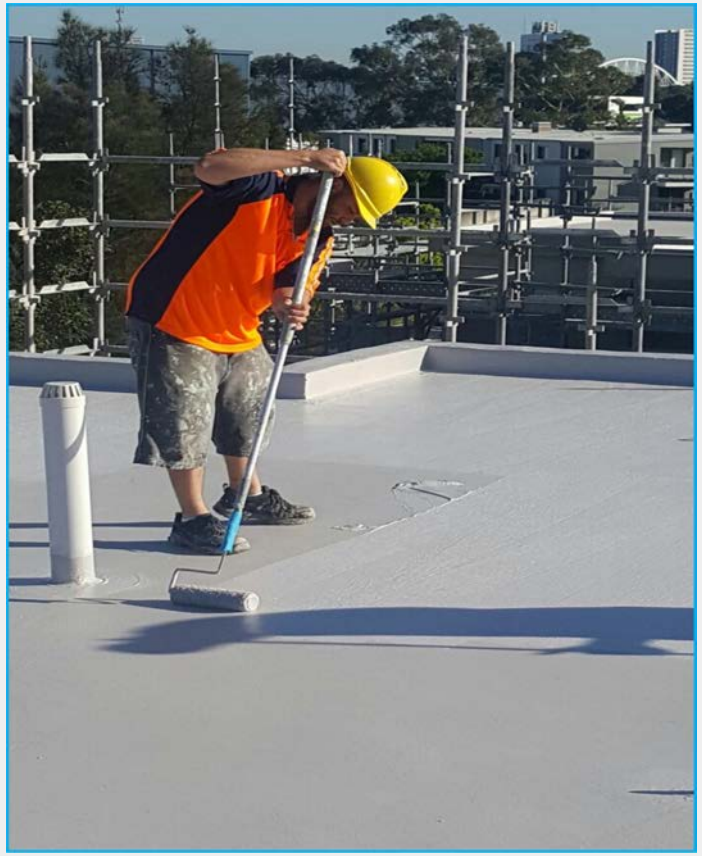



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Liquid Waterproofing Advantages over the traditional systems

1. Set up an elastic, continuous, joint less, without overlaps, thick waterproofing membrane able to bridge over cracks and movements of the substrate.
2. Fully adhered systems, water cannot flow between layers.
3. Details and singular points are easily solved and completely watertight.
4. Versatile. Over different types of surfaces and materials. Accepts many different finishes. Exposed/non exposed.





DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Why use Duromastic P15

Water based polyurethane membrane

- Fast drying Rapid Cure Technology
- Water-Based, Environmentally Friendly
- Excellent Strength & Over 800% Elongation
- Single Component, Simple Application



Where can I Use it

- Internal Wet Areas
- Balconies
- Podiums
- More flexibility in design
- Cost Effective
- Fast Installation
- Rooftops (Non Exposed Light Traffic)



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Polyurethane Liquid Applied Trafficable Roof system



Why use this system

- Fast installation
- Time and money saving
- Make your valuable roof top real estate
- A living and accessible area
- Astatically very pleasing arising the value of your pocket.
- Great for complex design such as multiple joins, junctions and corners.



Features

- Single component, easy to spread
- Class III – elongation as per AS / NZ 4858
- Excellent toughness
- Low odour, low VOC

Use Areas

- Rooftops (Exposed to UV)
- Rooftops (Non exposed light traffic)

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Durotech Duroseal Joint Sealants

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Duroseal 25FC

Duroseal 25FC is a single component moisture curing polyurethane construction sealant. Duroseal 25FC is tough durable and has good chemical resistance.



Where we can use

- Perimeter sealing of windows
- Curtain walls
- Masonry Joints
- Expansion joints in precast / tilt up panels.
- Tile joints in walls & floors.
- Metal cladding
- Pavement joints,
- Car parks,
- Drivewyas.
- General construction sealant.
- Adhesive for light weight components.

Why use it

- Highly Flexible
- Fast curing
- Paintable
- Tear resistant
- Excellent adhesion to most common building materials

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Duroseal Hyperflex 25

Duroseal Hyperflex 25 is a one part, moisture curing Hybrid Technology Sealant that displays excellent performance characteristics including +/-25% Joint Movement capability.



Where it can be used

- Construction Joint Sealant applications
- Vertical and horizontal expansion joints
- Non fire rated pipe penetrations
- Perimeter seals around doors, windows and facades
- General purpose interior joint sealant applications
- Sealing and bonding metal roofing systems
- Automotive and marine applications requiring a flexible adhesion profile between substrates.

Why is it number one?

- Low modulus, meaning that it is easy to extrude
- Is easy to tool and maintains Non Slump characteristics
- Technically advanced material
- Safer, less hazardous material to work with
- Most importantly, Hyperflex 25 is Isocyanate Free and contains no solvents.

Durotech Epoxy Systems



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Duropoxy SLR 100





Description:

DuroPoxy SLR 100 is a solvent free, durable floor coating wearing, two component epoxy resin system.

Why use Duropoxy SLR 100

- Kits – no onsite mixing errors
- 100% solvent free
- Extended working time
- Chemical resistance
- Bonds to damp surface
- Chemical resistant
- Non-flammable
- Can be coloured – enhance the solution for client needs

Uses

- Workshops
- Garage Floors
- Factory Floor
- Warehouses
- Shop Floors



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Duropoxy SLT 2000



Description:

DuroPoxy SLT 2000 is a solvent free, durable floor coating based on a hard wearing, two component epoxy resin system.

Why use Duropoxy SLT 2000

- Kits – no onsite mixing errors
- 100% solvent free
- Extended working time
- Chemical resistance
- Bonds to damp surface
- Chemical resistant
- Non-flammable
- Can be coloured – enhance the solution for client needs

Uses

- Workshops
- Garage Floors
- Factory Floor
- Warehouses
- Shop Floors



* Can be applied 2000 microns in one coat*

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

PRIMER & MOISTURE Barrier

Duromix WBE Hibuild is a two-part water-based epoxy coating designed as a primer/sealer and barrier coat.



Why Use Duromix Hibuild WBE Epoxy

- Blistering of paint and texture coating finishes
- Poor top coat adhesion
- Drummy render
- Poor masonry bonding
- Efflorescence
- Crumbling substrates Duromix WBE Hibuild also enables new/green concrete or render to be top coated with minimum delay.



ALSO IDEAL FOR USE ON:

- Water Features
- Retaining Walls
- Planter Boxes
- Primer Under waterproofing membranes

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

DUROTORCH GREEN ROOF WATERPROOFING SYSTEMS




DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years


Building owners decide to install a green roof for many reasons: environmental, energy savings, increasing the useful life of the roof, increasing the value of the building, marketing power and to block out surrounding buildings.

INTRODUCING DUROTORCH GARDEN ANTIROOT

Problem

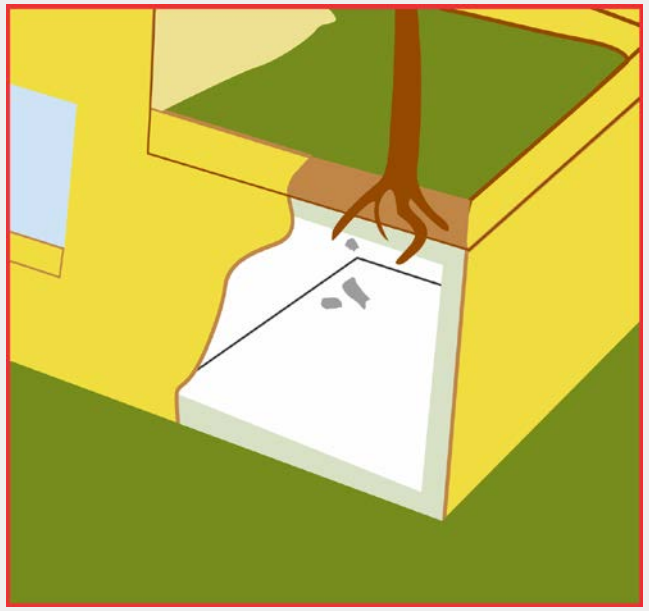

Solution

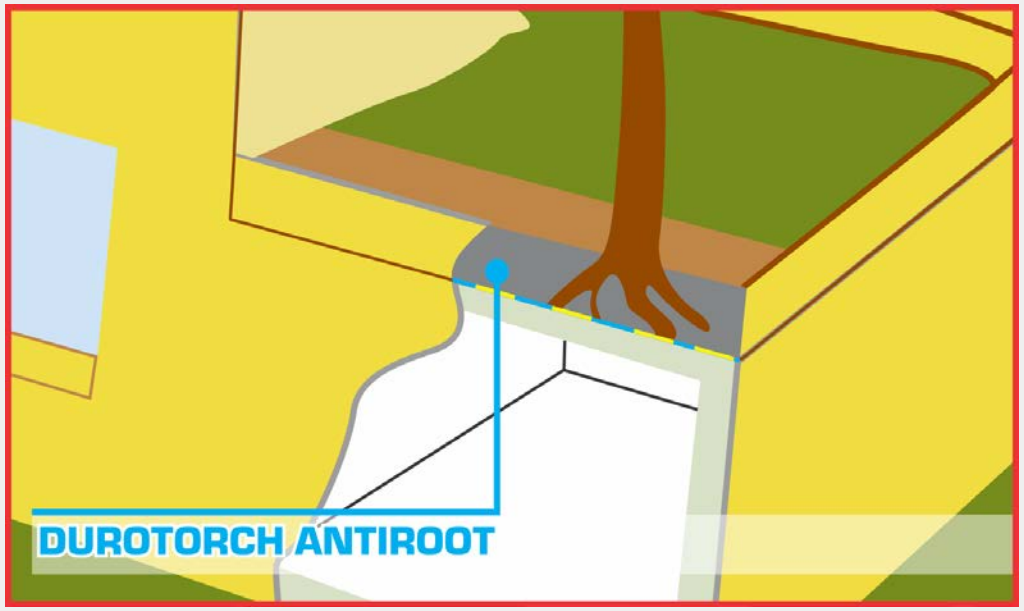

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Environmental Benefits:

Green roof systems benefit the environment in several ways. They help to reduce the “heat island” effect. As urbanization increases, greenhouse gases and congestion increases the pollution in the air and helps temperatures rise but only in the city; the surrounding rural areas are not affected.


Economical Benefits:

Green roof systems reduce our dependence on non-renewable sources of energy such as coal and oil by reducing the building’s use of energy for heating and cooling interiors spaces, thus reducing your overall utility bills.

How does it work?

DUROTORCH GARDEN ANTI ROOT Waterproofing membrane is composed of APP modified bitumen with a composite polyester reinforcement which results in a better dimensional stability and mechanical resistance.


The coating mass and the reinforcement contain a root-repellent substance to prevent roots to penetrating the waterproofing system

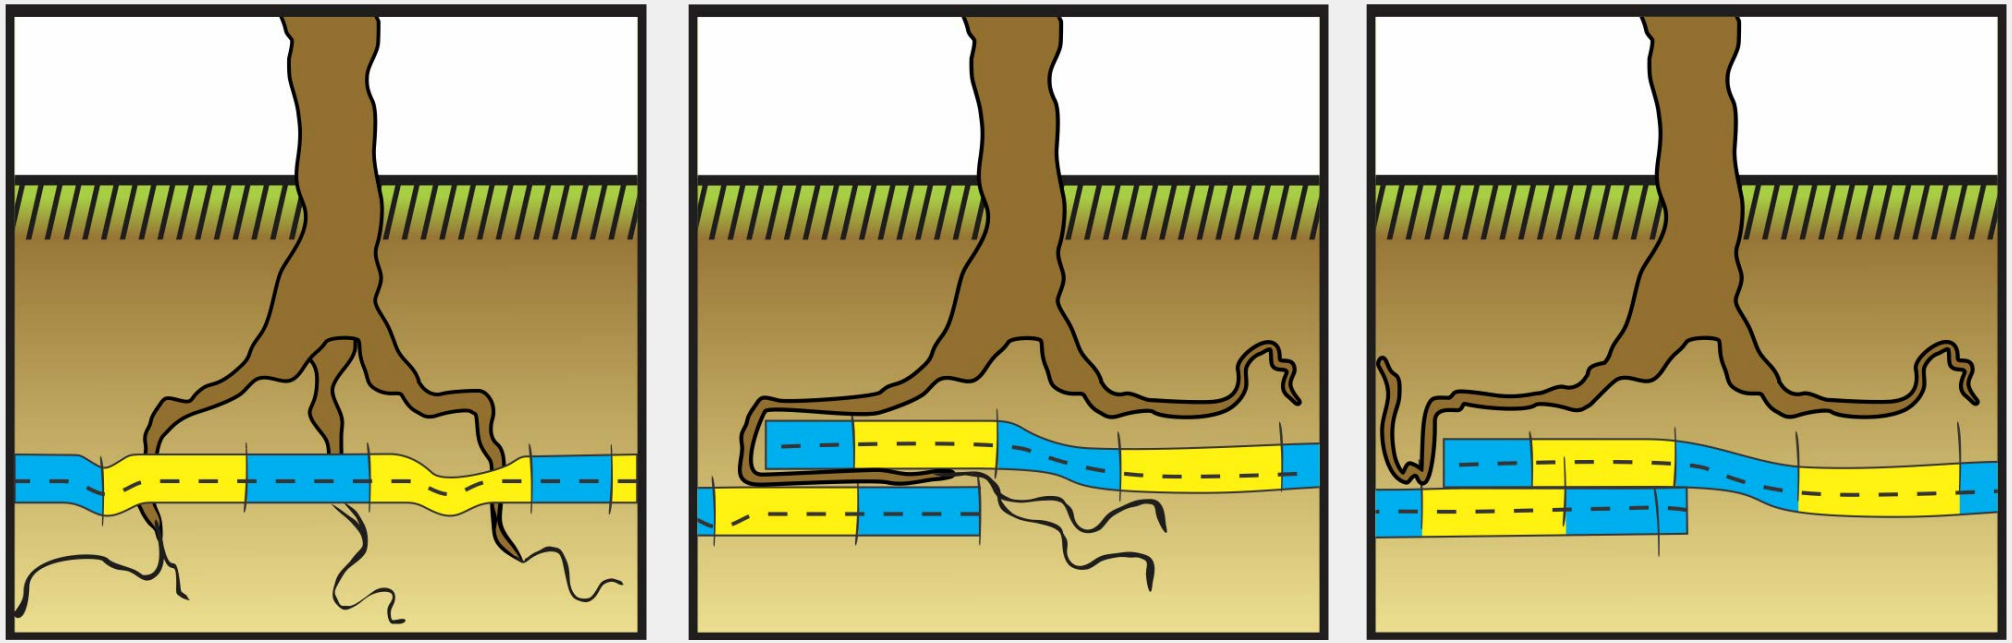

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Where does it get used?

It is always applied as the last waterproofing layer in contact with the earth for gardens. When waterproofing roof gardens for instance, it is used as the top layer of a system, the first layer being a polymer-bitumen membrane reinforced with “non-woven” polyester fabric **DUROTECH TORCH APP 3MILL** and the second being **DUROTORCH GARDEN ANTIROOT** which is placed astride the overlaps of the previous layer and full bonded with the torch

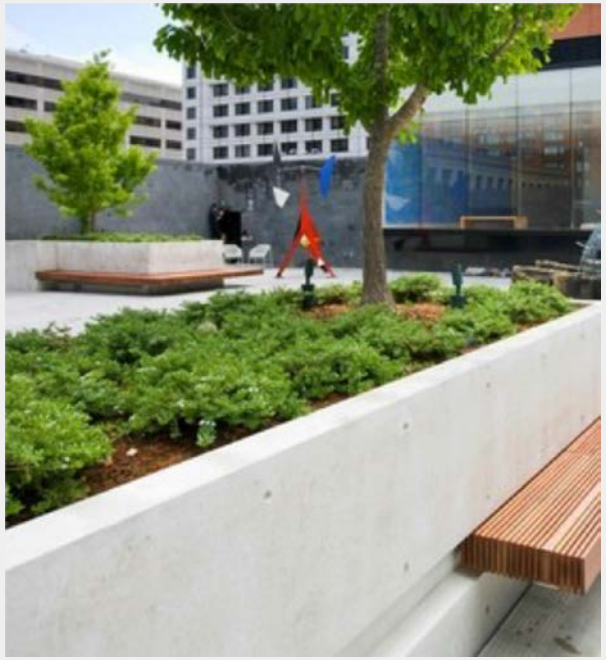

Why use it?

DUROTORCH GARDEN ANTIROOT exhibits both excellent dimensional and mechanical stability, making it particularly suitable for waterproofing civil, industrial and residential building projects. Limited land resources and expensive energy costs have contributed to creating the need for green roofs. Green roofs provide excellent insulation, reduce noise transmission and improve air quality .

Use Areas

- Waterproofing Retaining Walls
- Waterproofing Planter Boxes
- Waterproofing Roof Gardens (Green Roofs)

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years



DUROTECH POLYMERS

Made In Australia For Over 40 Years

DOW®

Authorized Distributor

Durotech Polymers is proud to announce that it is now a DOW Diamond authorized distributor of DOW HYPERLAST™ Spray Systems which have sprayed thousands of jobs all over the WORLD.

®™ Trademark of The Dow Chemical Company ("DOW") or an affiliated company of DOW.

Waterproofing Membrane that drys in 15 seconds!!!

The Five Second waterproofing system

Polyurethane spray can be used in extreme conditions. When it is used on substrates almost saturated with water, polyurethane spray will not provoke blistering nor will blistering occur when the air contains high amounts of humidity. Even at very low temperatures (as low as minus 20°C) the Polyurethane spray coating will still cure. Polyurethane spray coatings combine high flexibility with hardness. They are the most suitable coatings when the following is required:

Why use this Technology

- High curing speed,
- Application under high humidity and/or at low temperatures,
- Extreme abrasion resistance
- Impermeable membranes
- High thickness build up
- Chemical resistance.

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Introducing DOW HYPERLAST™ EMH 85

HYPERLAST™ EMH 85 is a two component sprayable elastomer designed for use through 1:1 volumetric equipment.

Features:


- Fast curing
- Elastomeric
- Solvent free
- 100% solids
- 100% waterproof
- Very Low VOC
- Seamless application
- Excellent abrasion resistance
- Trafficable
- Excellent Durability
- Fast System
- Application Convenient 1:1 Mix ratio

Use Areas:

- Green Roofs
- Podiums
- Roof Tops
- Planter Boxes
- Car Parks
- Retaining Walls
- Balconies
- Cut & Covered Tunnels

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

What is the Waterproofing System

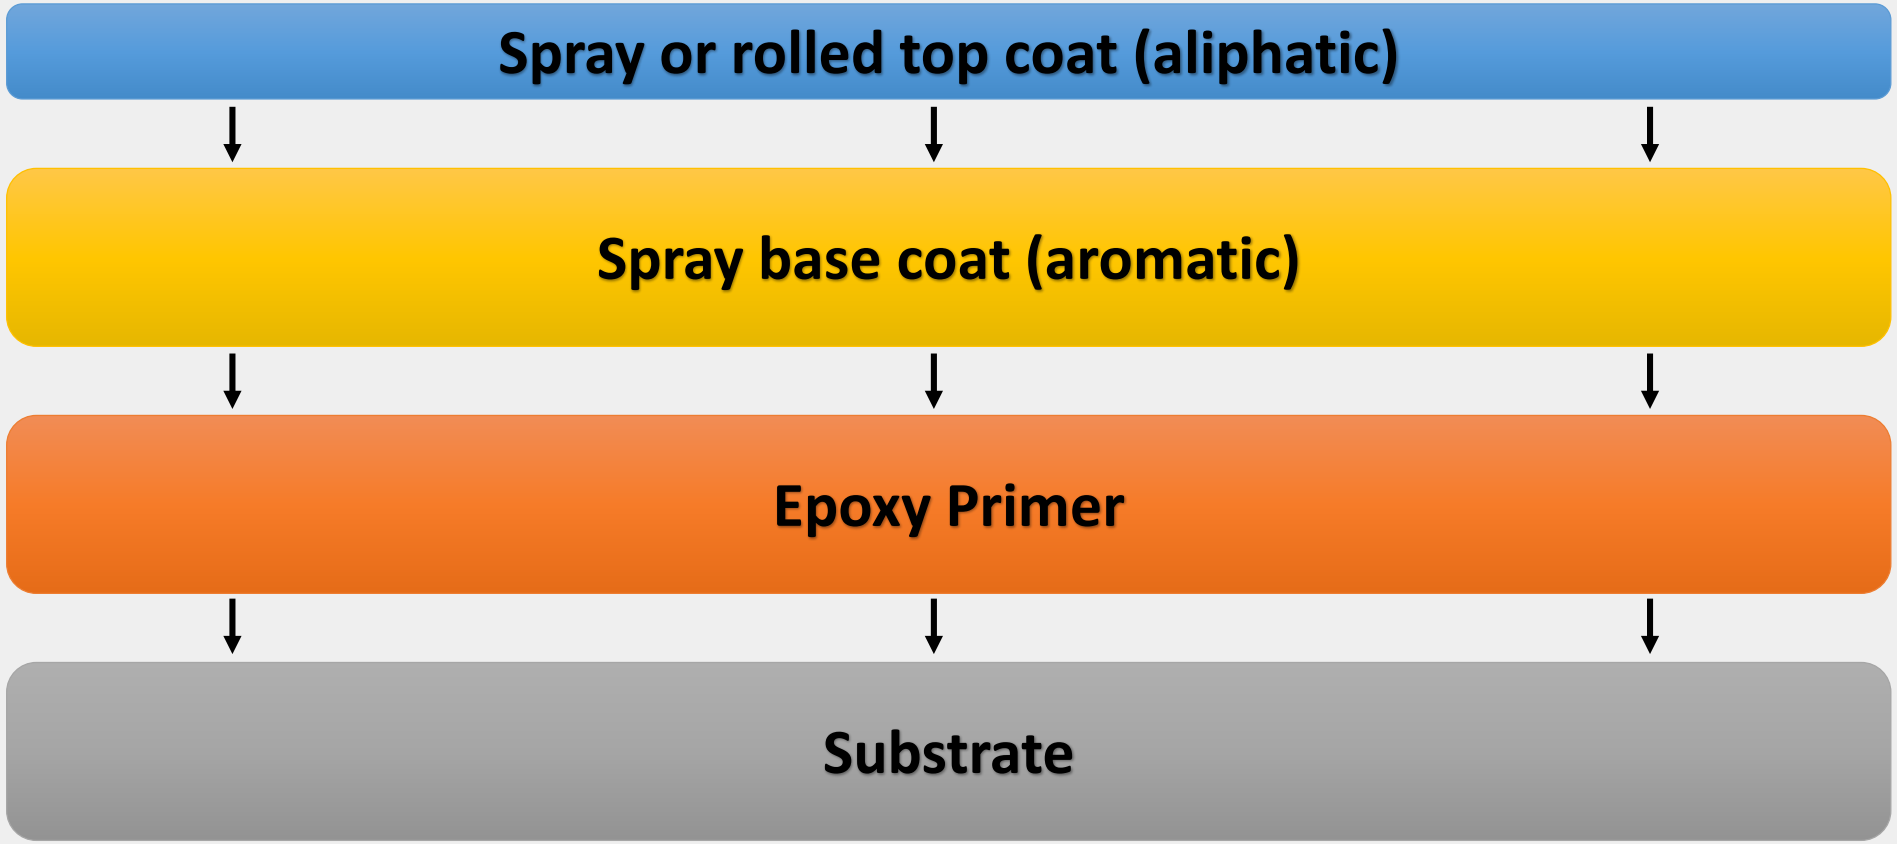

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

How does Polyurethane Spray compare?

Properties	Polyurethane	Epoxy	Spray System
Working Times	Slow	Slow	**Extremally fast (5 seconds to 45 minutes)**
Moisture Sensitivity	Yes	Yes	**No, moisture insensitive**
Elongation	600%	Tend to get brittle	**Up 700%**
Colour stability	Average, yellowing	Average, yellowing	**Aromatics: average** **Aliphatics: 100% UV resistant and color stable**
Abrasion resistance	Average	Good	**Very Good**
Superior tensile strength	Good	Average	**Good**
Chemical resistance	Good	Good	**Excellent**
VOC free	No	No	**Yes**
Temperature resistance	From -30^{0}C to +140^{0}C	From -20^{0}C to +110^{0}C	**From -50^{0}C to +150^{0}C**
Seamless	No	No	**Yes, unlimited mil thickness with one layer**
Coverage	Different	Different	**Average 1L = 1m^2 = 1mm**
Duration	Good	Average	**Excellent**

DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years

Thanks for Listening
Any Questions?



DUROTECH
Waterproofing • Sealants • Adhesives
Made In Australia For Over 40 Years