PRODUCT DATA SHEET

DUROPVC 800

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

DUROPVC 800 is a PVP-P based waterproof roofing membrane with underlay of a non-woven PES-textile (mass per unit area-120g/m^2). It is resistant to UV radiation and can be exposed to the direct weathering influences. DUROPVC 800 has one edge of the sheet without non-woven textile due to enable a longitudinal band joining.

USE

Fatrafol 807v is identified for adhesion systems. The membrane can be adhered directly onto a construction of a roofing mantle, which fulfils requirements for flatness (Fibre-cement, vibrates concrete, etc), possibly onto a suitable waterproof layer beginning treated by heat. The expansion polyurethane adhesives which are especially identified for cementing can be applied.

The membrane is unsuitable for adhesion onto bitumen surfaces and for mechanical anchoring.


It is necessary to apply a homogenous sheet Fatrafol 804 due to detail working.

APPLICATION

The laying of DUROPVC 800 can be made by specialised and for this purpose trained firms at the constructions. The membrane is applied under conformity with fundamentals being set and described in a Construction and Technologic Instruction of the producer, being valid in the time of waterproofing.

The membrane must be adhered to a stable part of the substrate/coating by sticking (polyurethane adhesives).

The membrane is mutually jointed by welding of hot air. The laying and jointing can be carried out in temperatures up to -5 degrees celsius.

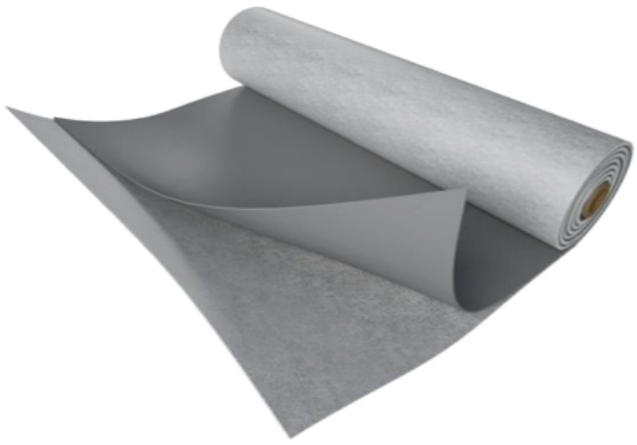

SINCE 1977

PRODUCT DATA

DUROPVC 800 meets the requirements of the standard EN 13956

Thickness [mm] (EN 1849-2)	**Width [mm]** (EN 1848-2)	**Length [m]** (EN 1848-2)	**Quantity [m²]**
effective: 1.20 (- 0.06; + 0.12) total: 1.60 *)	total: 2050 (- 10; + 20) free edge: 70 (± 10)	19 (- 0; + 0.95)	38.95
	total: 1650 (- 10; + 20) free edge: 70 (± 10)	19 (- 0; + 0.95)	31.35
		15 (- 0; + 0.75)	32.8
effective: 1.50 (- 0.07; + 0.15) total: 1.90 *)	total: 2050 (- 10; + 20) free edge: 70 (± 10)	16 (- 0; + 0.8)	
	total: 1650 (- 10; + 20) free edge: 70 (± 10)	16 (- 0; + 0.8)	26.43
		12 (- 0; + 0.6)	19.8
effective: 2.00 (- 0.10; + 0.20) total: 2.40 *)	total: 2050 (- 10; + 20) free edge: 70 (± 10)	13 (- 0; + 0.65)	26.65

Dimensions

*) Informative value

Packing, transport & storage: Fatrafol 807 is packed into the rolls, which are laid on the wood pallets and fixed by a packing film. FATRAFOL 807 must be transported in covered transporting means and stored in original closed packing. The recommended storage temperature is from -5 °C to +30 °C. There is necessary to protect the product from pollution at the building site. There is recommended to protect it from weathering influences till the processing time.

Technical Parameters

*) The samples meet also at the pressure of 60 kPa

Characteristic		Test standard	Values of individual product thicknesses		
			1.60 mm	1.90 mm	2.40 mm
Visible defects		EN 1850-2	meets	meets	meets
Straightness		EN 1848-2	≤ 50 mm	≤ 50 mm	≤ 50 mm
Flatness		EN 1848-2	≤ 10 mm	≤ 10 mm	≤ 10 mm
Dimensional stability		EN 1107-2	max. ± 0.3 %	max. ± 0.3 %	max. ± 0.3 %
Maximum tensile force	MD CD	EN 12311-2 method A	≥ 650 N/50 mm ≥ 650 N/50 mm	≥ 700 N/50 mm ≥ 700 N/50 mm	≥ 950 N/50 mm ≥ 950 N/50 mm
Elongation at maximum tensile force	MD CD		≥ 150 % ≥ 150 %	≥ 150 % ≥ 150 %	≥ 150 % ≥ 150 %
Tear resistance		EN 12310-2	≥ 160 N	≥ 180 N	≥ 220 N
Foldability at low temperature		EN 495-5	≤ -25 °C	≤ -25 °C	≤ -25 °C
Joint peel resistance		EN 12316-2	≥ 200 N/50 mm	≥ 250 N/50 mm	≥ 280 N/50 mm
Joint shear resistance		EN 12317-2	≥ 600 N/50 mm	≥ 720 N/50 mm	≥ 800 N/50 mm
Water tightness, 400 kPa		EN 1928 method B	meets	meets	meets
Resistance to static load		EN 12730 method B	meets 20 kg	meets 20 kg	meets 20 kg
Reaction to fire		EN 13501-1	Class E	Class E	Class E
Resistance to impact		EN 12691 method A	meets 1000 mm	meets 1250 mm	meets 1250 mm
		EN 12691 method B	meets 1500 mm	meets 2000 mm	meets 2000 mm
Exposure to UV radiation, elevated temperature and water		EN 1297	meets, grade 0	meets, grade 0	meets, grade 0
Water vapour properties - factor μ		EN 1931	10000 ± 3000	10000 ± 3000	10000 ± 3000
Mass per unit area		EN 1849-2	1.64 (-0.08; +0.16) kg/m²	2.03 (-0.10; +0.20) kg/m²	2.66 (-0.13; +0.27) kg/m²
Resistance to root penetration		EN 13948 FLL test	meets	meets	meets

Safety Instruction

Scrap disposal: Fatrafol 807 must be disposed conformable with valid legal regulations. The clear scrap can be recycled, scrap not suitable for recycling you can depony. Waste, polluted by dangerous substances, is necessary to dispose by burning in the incinerator of dangerous wastes.

Safety at work and health protection

There is necessary to keep all safety, hygienic and fire regulations valid in the time of laying and membrane joining.

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ

ISO 9001 Quality Certified System
ISO 14001 Environment Certified System
ISO 45001 Health and Safety Certified System