PRODUCT DATA SHEET

DUROPVC 900

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

DuroPVC 900 is a roofing membrane on the basis of PVC-P reinforced with a polyester grid. It is resistant to UV-radiation and can be exposed to the direct weathering influences. The membrane is not compatible with bitumen, protection layer is required where exposed to bitumen. DuroPVC 900 is produced by calendaring and lamination, DuroPVC 900 by a multi-extrusion processing. All the production variants are described in this Technical Data Sheet further like DuroPVC 900, only.

USE

DuroPVC 900 is identified first of all making the one layer coating coverings of flat roofs, mechanically anchored to the underlay without loading layers.

APPLICATION


The laying of DuroPVC 900 can be made by specialised and for this purpose trained firms at the constructions.

DuroPVC 900 is applied conformable with fundamentals being set and described in a Construction and Technologic Instruction of the producer, being valid in the time of waterproofing providing. The membrane must be fixed to a stable part of a roofing coating by suitable way and it is by means of special anchoring elements. The kind of anchoring must be proposed for the particular applications so for being the membrane secured from the dimensional changes and wind suction.

The membrane is mutually jointed by welding of hot air. The laying and jointing can be carried out in temperatures up to -5 degrees celsius.

PRODUCT DATA

DuroPVC 900 fulfils requirements of the standard EN 13956

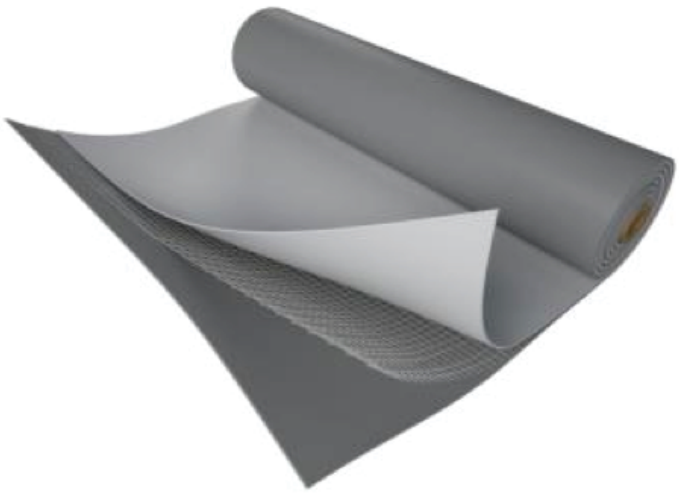

SINCE 1977

PRODUCT DATA

DUROPVC 800 meets the requirements of the standard EN 13956

Thickness [mm] (EN 1849-2)	Width [mm] (EN 1848-2)	Length *) [m] (EN 1848-2)	Quantity [m^2]	Weight of the roll [kg]**)
FATRAFOL 810				
1.20 (-0.06; +0.12)	1300 (-6; +13)	20 (-0; +1)	26	41
	650 (-3; +6)	20 (-0; +1)	13	21
	215 (-2; +4)	40 (-0; +2)	8.6	13
	160 (-2; +4)	40 (-0; +2)	6.4	10
	120 (-2; +4)	40 (-0; +2)	4.8	8
1.50 (-0.07; +0.15)	1300 (-6; +13)	20 (-0; +1)	26	51
	1000 (-5; +10)	20 (-0; +1)	20	38
	650 (-3; +6)	20 (-0; +1)	13	26
	215 (-2; +4)	32 (-0; +1.5)	6.88	14
	160 (-2; +4)	32 (-0; +1.5)	5.12	10
2.00 (-0.10; +0.20)	1300 (-6; +13)	15.4 (-0; +0.7)	20	39
FATRAFOL 810/V				
1.20 (-0.06; +0.12)	2000 (-10; +20)	25 (-0; +1)	50	78
	2000 (-10; +20)	20 (-0; +1)	40	61
	1000 (-5; +10)	25 (-0; +1)	25	39
	2050 (-10; +20)	25 (-0; +1)	51.12	80
	1025 (-10; +20)	25 (-0; +1)	25.625	39
	1600 (-10; +20)	25 (-0; +1)	40	61
	1600 (-10; +20)	20 (-0; +1)	32	49
1.50 (-0.07; +0.15)	2000 (-10; +20)	20 (-0; +1)	40	78
	1000 (-5; +10)	20 (-0; +1)	20	39
	2050 (-10; +20)	20 (-0; +1)	41	80
	1025 (-10; +20)	20 (-0; +1)	20.5	40
	1600 (-10; +20)	20 (-0; +1)	32	61
	1600 (-10; +20)	15 (-0; +0.7)	24	46
	1300 (-10; +20)	20 (-0; +1)	26	50
	750 (-10; +20)	20 (-0; +1)	15	29
1.80 (-0.09; +0.18)	2000 (-10; +20)	16.5 (-0; +0.8)	33	77
	1000 (-5; +10)	16.5 (-0; +0.8)	16.5	39
	2050 (-10; +20)	16.5 (-0; +0.8)	33.825	78
	1025 (-10; +20)	16.5 (-0; +0.8)	16.9	39
	1600 (-10; +20)	16.5 (-0; +0.8)	26.4	61
2.00 (-0.10; +0.20)	2000 (-10; +20)	15 (-0; +0.7)	30	78
	1000 (-5; +10)	15 (-0; +0.7)	15	39
	2050 (-10; +20)	15 (-0; +0.7)	15	79
	1025 (-10; +20)	15 (-0; +0.7)	15	39
	1600 (-10; +20)	15 (-0; +0.7)	24	61
2.40 (-0.12. +0.24)	2000 (-10; +20)	13 (-0; +0.65)	26	81
	1600 (-10; +20)	13 (-0; +0.65)	20.8	64

Dimensions

*) The membrane can be provided also in another winding lengths (deviation from the normal length is of -0% + 5%) after agreement between producer and customer
**) Informative value

Packing, transport & storage: DuroPVC 900 is packed into the rolls, which are laid on the wood pallets and fixed by a packing film. DuroPVC 900 must be transported in covered transporting means and stored in original closed packing. The recommended storage temperature is from -5 °C to +30 °C. There is necessary to protect the product from pollution at the building site. There is recommended to protect it from weathering influences till the processing time.

FATRAFOL 810/V, FATRAFOL 810/V AA							
Characteristic		**Test standard**	**Values of individual product Thicknesses**				
			1.20 mm	**1.50 mm**	**1.80 mm**	**2.00 mm**	**2.40 mm**
Visible defects		EN 1850-2	meets				
Straightness		EN 1848-2	≤ 50 mm				
Flatness		EN 1848-2	≤ 10 mm				
Dimensional stability		EN 1107-2	max. ± 0,3 %				
Tensile strength	MD	EN 12311-2 method A	≥ 1000 N/50 mm	≥ 1000 N/50 mm			≥ 1100 N/50 mm
	CD		≥ 1000 N/50 mm	≥ 1100 N/50 mm			≥ 1200 N/50 mm
Elongation at break	MD		≥ 15 %				
	CD		≥ 20 %				
Tear resistance	MD	EN 12310-2	≥ 200 N				≥ 250 N
	CD		≥ 220 N				≥ 270 N
Foldability at low temperature		EN 495-5	≤ -25 °C				
Joint peel resistance	MD	EN 12316-2	≥ 260 N/50 mm				
	CD		≥ 260 N/50 mm				
Joint shear resistance	MD	EN 12317-2	≥ 1000 N/50 mm				≥ 1100 N/50 mm
	CD		≥ 1000 N/50 mm				≥ 1100 N/50 mm
Water tightness 400 kPa *)		EN 1928 method B	meets				
Resistance to static load		EN 12730 method B	meets 20 kg				
Resistance to fire		EN 13501-1	Class E				
Resistance to impact		EN 12691 method A	meets 1000 mm	meets 1250 mm			meets 1750 mm
		EN 12691 method B	meets 2000 mm				
Exposure to UV radiation, elevated temperature and water		EN 1297	meets, grade 0				
Water vapour properties - factor μ		EN 1931	15000 ± 4500				
External fire performance **)		ENV 1187	B_{ROOF} (t1), B_{ROOF} (t2), B_{ROOF} (t3)				
Rezistance to root penetration		EN 13948 FLL test	meets				

Technical Parameters

*) The membranes meet the test pressure of 60 kPa.

**) The DuroPVC 900 AA achieved within a given ply-structure of roofing coat a classification of AA rating according to BS 476-3:1958.

MD - Machine Direction, CD - Cross Direction

Safety Instruction

Scrap disposal: DuroPVC 900 must be disposed conformable with valid legal regulations. The clear scrap can be recycled, scrap not suitable for recycling you can depony. Waste, polluted by dangerous substances, is necessary to dispose by burning in the incinerator of dangerous wastes.

Safety at work and health protection

There is necessary to keep all safety, hygienic and fire regulations valid in the time of laying and membrane joining.

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ

ISO 9001 Quality Certified System IQNet
ISO 14001 Environment Certified System IQNet
ISO 45001 Health and Safety Certified System IQNet