DUROTECH

DURO MASTIC DUROARMOR HB NON SLIP

Trafficable Exterior Membrane coating for Roof decks, Plant Rooms & balconies

DUROARMOR HB Non Slip is a high build siloxane modified acrylic waterproof and UV resistant liquid membrane with added aggregate. The acrylic system is based on materials with years of proven use. The product is used either for long-term waterproofing or as an architectural protective coating. It can also be used as a protective coating over mineral chip bitumen membranes. It is highly resistant to weathering, fungi and algae. Although the membrane is waterproof it allows the substrate to breathe, reducing the risk of blistering.

PRINCIPLE CHARACTERISTICS

- UV stable, weather resistant
- Water-based, non-hazardous
- Non-slip foot trafficable properties'R' rating determined by aggregate size But will meet AS 4686 & HB197 when Applied in the correct manner for the area concerned.
- Protects against damage by UV, CO2, water and chlorides
- Tintable to 100's of colours in flat & low sheen
- Permanently flexible, with low dirt pickup
- Application by brush and roller
- Good crack bridging capability
- Mould, fungi, bacteria and algae resistant
- Environmentally friendly, low odour and VOC compliant.
- Easily maintained and repaired
- Excellent adhesion to concrete, fibrous cement, timber, water based paints, aged gal. PVC, timber, colorbond, aged alkyd, bitumen.

USE AREA

- Concrete slabs, brick or blockwork, parapets, balconies.
- Bitumen roof top coating
- As a colour topcoat for Duroroof, Duromastic AC & P15.

PACKAGING

- 15 Litre
- 4 Litre

TECHNICAL INFORMATION

Colour:	Can be easily tinted to 100's of colours in low sheen & flat finishes. Consult Durotech if dark colours are specified on a membrane project.
Dry Time:	Touch dry 1-2 hours @ 25ºC
Recoat:	4-6 hours @ 25ºC
Coverage:	2 coats each at 1 Litre /M^2 DFT 1.2mm total
Elongation at Break:	>300% at 25°C
Tensile Strength:	> 1.7MPa, white
Solids Content:	65-70%, white
Water vapour permeability, SD	Class II (medium 0.14-1.4 m), ISO 7783-2
Water absorption, W24	<0.1 kg/m2 h 0.5 Class III (low), ISO 1062-3
VOC:	40 grams/litre, SCAQMD Method 304-91
Shelf Life:	min. 12 months, unopened and stored @ 20°C

PREPARATION


All surfaces shall be sound, clean, dry and free of release curing agents, laitance, efflorescence, oils, bird droppings, mould, algae and other contaminants. Check adhesion by applying to a test area. Concrete, blockwork and cement render should be at least 28 days old, dry and free of voids and other surface defects. Make sure painted surfaces are sound and remove any chalking by pressure spray and/or a 'sugar soap' detergent wash. For mould, fungi and algae affected areas pressure spray and then treat with Duroprep Antifungal Concentrate to destroy fungal spores and algae remains.

PRIMING

Treat the top of cement slab, rendered parapets and balcony floors with Duromix™ Hibuild WBE. Re-prime with a 2nd coat if necessary.
For surfaces that are extensively cracked but still adhering well, Duroroof may be applied as a basecoat over WBE. Alternatively, incorporate Durotech polyester reinforcing fabric. For substrates suspected of damp, apply Duromix™ Hibuild WBE or Duromix Epoxycoat,2 coat minimum, but seek technical advice first.

APPLICATION

Apply by brush and roller.
For joints subject to movement, seal with Durotech PU sealant. Contact Durotech beforehand for technical details. To reinforce joints, apply a first coat of DUROARMOR HB Non-Slip by brush or roller to about a metre length of the prepared and sealed joint. Immediately lay 150mm to 200mm wide reinforcing fabric into the wet surface. Then apply another coat and work in carefully in one direction by brush or roller to saturate the fabric, before moving onto the next section of the joint.

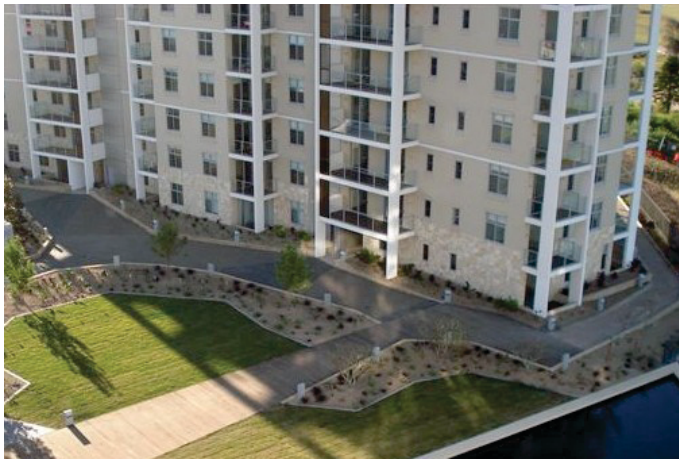

PRECAUTIONS

Do not apply water-based primers or DUROARMOR HB Non-Slip below 10°C ambient or above 30°C or in hot windy conditions, or if rain is likely within 6 hours. In summer apply in the cooler part of the day. Be sure coating is cured before contact with water. Wash equipment with water before dry. Do not expose to solvents. Clean periodically to maintain surface and re-coat when necessary.

CLEANUP Use fresh water before material has set. Soften cured material with mineral turps.

SAFETY Avoid breathing vapours and contact with skin and eyes. FIRST AID: In case of contact rinse immediately with plenty of water . SPILLS: Contain spill and prevent entry into to waterways. Refer to Durotech Safety Datasheet before use.

DUROTECH

14 Essex Street, P.O Box 5092, Minto, NSW 2566

+61 2 9603 1177 | +61 2 9475 5059 | sales@durotechindustries.com.au

www.durotechindustries.com.au

The information provided in this data sheet is correct at the time of printing (albeit is subject to change at any time) and is intended to give a simple description of the product and its capabilities. In practice, the substrate, intended surface to be treated and environmental conditions vary widely, making it essential for the user to determine the products suitability for a particular application and to ensure that the product is not used beyond its physical limitations. If in doubt contact the manufacturer. The product will perform as described herein provided it is applied in accordance with the manufacturer's instructions as stated in this data sheet and provided that the building and installation is structurally sound and the application is carried out competently. Durotech terms and conditions of sale apply.