PRODUCT DATA SHEET

DUROTECH D SERIES

PVC Waterstop Plate

D-150
D-200
D-230

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

Durotech D is a polyvinyl chloride (PVC) waterstop system which provides a physical barrier to seal in-situ concrete joints. All three Durotech D profiles work by increasing the displacement water needs to travel through the joint. The contour of each profile also ensures the waterstop is secure against structural movement and induces tensions across the whole waterstop section.

PROFILES

- Durotech D150 – centrally placed waterstop for construction joints.
- Durotech D200 – centrally placed waterstop for construction or expansion joints.
- Durotech D230 – externally placed waterstop for construction or expansion joints.

Note: Durotech D profiles can be also produced as a dual waterstop system which consists of a hydrophilic rubber being cast into the waterstop profille. This is known as the Durotech DX Series. For more information, please contact your nearest distributor.

FEATURES

- No shelf life
- Extensive warranty period
- Continuous on-site welded system
- Range of profiles available to suit almost any application
- Sustains effective seal in submerged environments
- Use in salt or fresh water
- Safe for drinking water
- Non-toxic and zero VOC

TYPICAL AREAS OF APPLICATION



- Basements and slab on grade
- Elevator pits and equipment pits
- Roof decks and podium areas
- Parking structures
- Swimming pools and water features
- Water towers, reservoirs and water storage tanks
- Dams, culverts, canals and spillways
- Tunnels, underground vaults, etc



TYPICAL PHYSICAL PROPERTIES

Form	Extruded PVC Profiles
Colour	Green Black
Elongation	250% min
Tensile strength	120kg/cm²
Hardness	Shore 'A' 65
Hydrostatic resistance	600kPa (60m head)
Service temperature range	-30°C to 60°C
Melting temperature	230°C approx
Chemical resistance	Alkali - good Brine - excellent

Profiles

	5mm x 150mm x 20m roll
	7mm x 200mm x 15m roll
	5mm x 230mm x 15m roll

Accessories

Jointing jigs, welding heat-rods, fastening clips, straight joiners, Durotech Sealant sealant.

SINCE 1977

DESIGN CRITERIA

Special consideration needs to be made when using PVC waterstops as the cross-sectional area could interrupt reinforcing bars, pipe penetrations and the like.

Concrete placement is vital as wrong positioning and excessive movement of the waterstop could render the system ineffective.

Concrete must be fully compacted around the waterstop to ensure no voids or porous areas remain.

For positing and formwork details, please refer to our installation guide.

APPLICATION INSTRUCTIONS

WELDING INSTRUCTIONS:

1. For positioning and full welding details, please refer to our installation guide.
2. Measure the length of waterstop required or feed the waterstop into position. Before trimming, allow approx 5 mm to each mating end to allow for melting.
3. Clamp the two ends into their respective sides of the jointing jig, with approximately 10 mm projecting and engage the guide rods.
4. Plug in the welding blade and allow to warm up. Using a small off-cut of waterstop, check that the blade reaches a temperature sufficient to melt the PVC. Ensure the area is well ventilated.
5. When the blade is at melt temperature, place it on edge of the guide rods of the jig between the mating ends of the waterstop. Press the waterstop firmly against either face of the blade until a molten bead of PVC approx 3mm thick appears along the length of the blade. Slide the jig apart, remove the heating blade and push the waterstop back together holding under pressure for a while which allows the molten PVC to fuse together. Allow to cool before proceeding.

STRAIGHT JOINER INSTRUCTIONS:

Alternatively, straight joiners can be used to join lengths.


1. Caulk each insert side of the straight joiner with Durotech Sealant sealant.
2. Squeeze the PVC waterstop into each side and ensure all gaps are completely filled with the sealant.
3. Once Durotech Sealant has cured, installation can continue.

SAFETY


Before using or handling materials, please read all relevant Safety Data Sheets (SDS).

TYPICAL POSITIONING

Wall to Wall or Slab to Slab

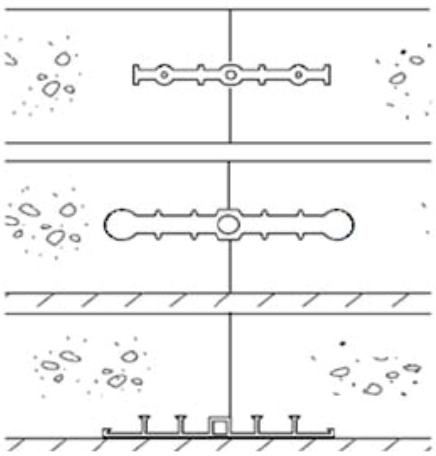

Wall to Floor

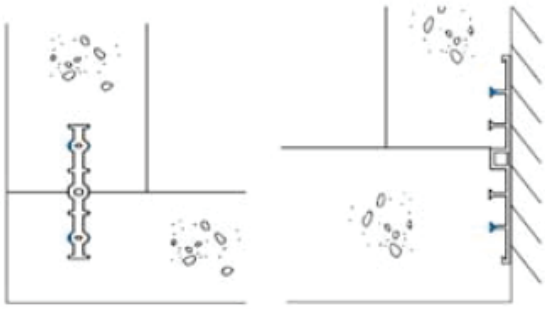

PRODUCT DISCLAIMER

The technical details, recommendations and other information contained in this data sheet are given in good faith and represent the best of our knowledge and experience at the time of printing. It is your responsibility to ensure that our products are used and handled correctly and in accordance with any applicable Australian Standard, our instructions and recommendations are only for the uses they are intended. Durotech does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product. We also reserve the right to update information without prior notice to reflect ongoing research and development programs. The supply of our products and services is also subject to certain terms, warranties and exclusions, which may have already been disclosed to you in prior dealings or are otherwise available to you on request. You should make yourself familiar with any relevant items.

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ

ISO 9001 Quality Certified System IQNet
ISO 14001 FC Environment Certified System IQNet
ISO 45001 Health and Safety Certified System IQNet