PRODUCT DATA SHEET

DUROTECH DP-0725H

Hydrophilic and Chloroprene Rubber

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

Durotech DP-0725H is a high performance, expanding hydrophilic rubber waterstop, with internal non-expanding chloroprene rubber layer, which swells to form a long-lasting water-tight compression seal. The double-layer design ensures that expansion is spread across the joint to achieve highly effective sealing. The swelling action is the result between water and hydrophilic groups which are part of the Durotech DP molecular structure. This waterstop comes with a self-adhesive backing making installation easy.

USES

Durotech DP-0725H is suitable for all static construction joints, penetrations or low-movement sections where there is any concern regarding water penetration. It is used to seal horizontal and vertical construction joints for in-situ concrete.

FEATURES

- Easy to install with a self-adhesive backing & simple butt joins - requires no welding or complex detailing
- Maximum seal achieved from double-layer rubber design as expansion is spread across the joint
- Can be applied to rough surfaces with the use of Durotech Sealant
- Swelling properties unaffected by long term wet/dry cycles
- Non-toxic and non-hazardous

TYPICAL AREAS OF APPLICATION


- Basements
- Elevator and equipment pits
- Swimming pools and water features
- Water towers, reservoirs and water storage tanks
- Tunnels, pipes and underground vaults
- Sewerage plants

TYPICAL PHYSICAL PROPERTIES

Form	Flexible double-layer rubber - expanding hydrophilic and non-expanding chloroprene - strip with self-adhesive
Colour	Blue (external) and black (internal)
Hydrostatic resistance	up to 50m head

	Hydrophilic Rubber (Blue)	Chloroprene Rubber (Black)
Elongation	309%	495%
Tensile strength	? N/mm²	8.5MPa
Hardness (Shore A)	47	70
Specific Gravity	1.35	1.41
Packaging	DP-0725H 25mm x 7mm x 10m roll (10 rolls per box)	
Accessories	Duroseal sealant	

Typical swelling

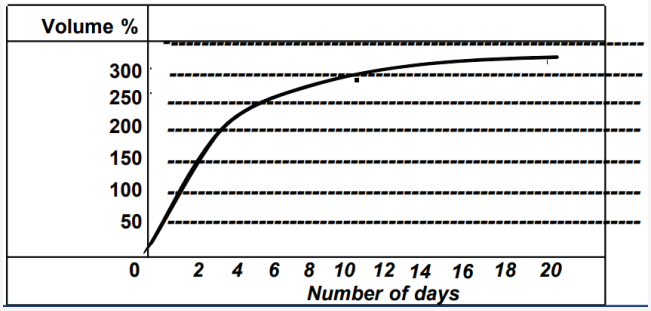

SINCE 1977

DESIGN CRITERIA

Durotech DP-0725H can be installed to either a channel formed in the concrete or directly onto the concrete surface.


For quick installation, it is recommended that a relatively smooth surface be provided along the path of the joint; however irregular surfaces can be accommodated by using Durotech Sealant as an adhesive.

Always ensure that there is a minimum of 50mm cover from the edge for reinforced concrete and 100mm cover of concrete from the edge for unreinforced concrete to the face of the Durotech DP to prevent concrete blow-outs & accommodate swelling forces upon expansion.


Durotech DP-0725H can also be used around penetrating pipe entries prior to concrete placement.

APPLICATION INSTRUCTIONS

1. Prep - carefully brush off all loose dirt and debris. Ensure surface is relatively smooth and free from oils, grease, dust, debris etc.
2. To join waterstop on construction joints, use a neat, firm butt join that is pushed up to the next section to be joined. Ensure the ends are square. Leave 100mm of Durotech DP-0725H to allow butt joining to the next pour.
3. For rough surfaces and hard to reach sections, Durotech Sealant can be used as an adhesive and filler of voids. For vertical sections, use concrete nails in conjunction with Durotech Sealant. Take care not to crack the concrete.
4. Peel protective adhesive backing paper from Durotech DP-0725H one section at a time. Press firmly down onto concrete surface ensuring the waterstop is completely adhered to surface. Durotech Sealant can be placed across any joints to ensure a watertight structure. When using non-adhesive Durotech DP-0725H , brush solvent-based contact adhesive onto the concrete 30mm wide and a layer should be brushed onto the Durotech DP-0725H.
5. Placement of concrete can proceed as soon as sufficient bond of the Durotech DP-0725H to the concrete has occurred. Care should be taken not to displace the waterstop during this process.



Detail A: Straight Joint



Detail B: Corner Joint

SAFETY

Before using or handling materials, please read all relevant Safety Data Sheets (SDS).

STORAGE

Durotech DP-0725H can be stored unopened for 12 months in a cool, dry place below 25°C. Any leftover material from site usage should be immediately returned to the original box and stored as outlined.

LIMITATIONS

- Do not leave product exposed to inclement weather conditions or submerged with water which could cause the material to expand prematurely. If this occurs, allow the product to fully dry out either naturally or by using a hot air gun before covering with Concrete. Not for use where excessive shrinkage or movement may occur
- Not recommended for use in suspended slabs or expansion joints
- Expansion rate can vary in salt or contaminated water.

PRODUCT DISCLAIMER

The technical details, recommendations and other information contained in this data sheet are given in good faith and represent the best of our knowledge and experience at the time of printing. It is your responsibility to ensure that our products are used and handled correctly and in accordance with any applicable Australian Standard, our instructions and recommendations are only for the uses they are intended. Durotech does not accept any liability either directly or indirectly for any losses suffered in connection with the use or application of the product. We also reserve the right to update information without prior notice to reflect ongoing research and development programs. The supply of our products and services is also subject to certain terms, warranties and exclusions, which may have already been disclosed to you in prior dealings or are otherwise available to you on request. You should make yourself familiar with any relevant items.

Durotech Industries Pty Ltd

Address	14 Essex Street, P.O Box 5092, Minto, NSW 2566
Phone	+61 2 9603 1177
Fax	+61 2 9475 5059
Email	sales@durotechindustries.com.au
Web	www.durotechindustries.com.au

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ

ISO 9001 Quality Certified System IQNet
ISO 1400 FC Environment Certified System IQNet
ISO 45001 Health and Safety Certified System IQNet