PRODUCT DATA SHEET

DUROTECH HYPERSEAL

joint selling system

High performance joint and crack sealing system for construction joints, expansion (movement) joints and connection joints or cracks.

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

Durotech Hyperseal is thin and extra-tough elastic strip with considerable longitudinal and lateral extension. Ideal for sealing and waterproofing expansion joints and over cracks subject to irregular and high movements. Excellent resistance to weathering, UV radiation and chemically stable. Thermal welding ensures secure, watertight joints.

FEATURES

- Flexible, permanently elastic,
- Highly versatile,
- Good tensile properties,
- Stable form and UV-resistant,
- Heat weldable,
- Easy to install,
- Long term resistance to bacterizes,
- Non-hazardous for users.

USE AREAS

- Construction joints and cracks,
- Future movements of the construction without causing
- damages,
- Basements,
- Tunnel construction,
- Around metal surfaces,
- Swimming pools,
- Cable and pipe penetrations,
- Sewage treatment plants.


TECHNICAL INFORMATION

Test	Standard	Unit	Result
Chemical Base of The Tape	Flexible TPE Based Polymer		
Surface Structure	Even or textured surface		
Tensile Strength Lateral	EN-ISO 527-3	Mpa	4,7
Tensile Strength Longitudinal	EN-ISO 527-3	Mpa	4,8
Maximum Tensile Elongation Lateral	EN-ISO 527-3	%	580
Maximum Tensile Elongation Longitudinal	EN-ISO 527-3	%	532
Tear Resistance Lateral	EN-ISO 527-2	N/mm²	48
Tear Resistance Longitudinal	EN-ISO 527-3	N/mm²	42
Shore	ISO 868	Shore A	70
Peal Strength	DIN 16860	N/mm²	>20
Colour	RAL 7040	Gray	
Water Pressure Strength	EN 1928	Bar	>5
Service Temperature	SIA V280/3+4	-	-30°C +80°C
Density		gr/cm²	1.400


STANDARD SIZES

Width	Thickness	Length
150 mm	1 mm / 1.25 mm / 1.50 mm / 2 mm	25 meters
200 mm	1 mm / 1.25 mm / 1.50 mm / 2 mm	25 meters
250 mm	1 mm / 1.25 mm / 1.50 mm / 2 mm	25 meters
300 mm	1 mm / 1.25 mm / 1.50 mm / 2 mm	25 meters
350 mm	1 mm / 1.50 mm	25 meters
400 mm	1 mm / 1.50 mm	25 meters


SINCE 1977

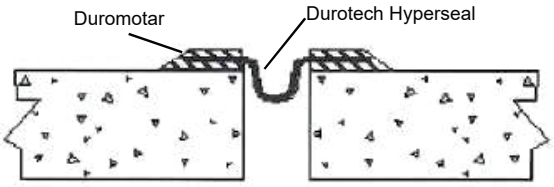


Expansion joint - high movement

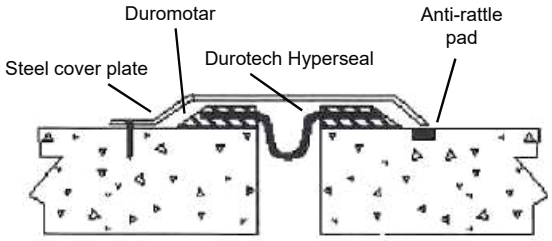


Car park with cover plate - high movement

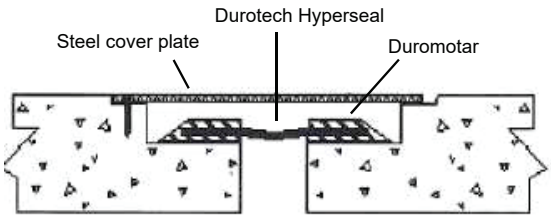

Recessed joint with cover plate

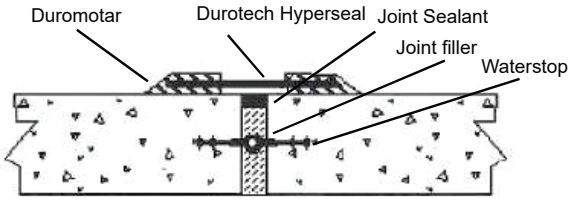

Water retaining structure

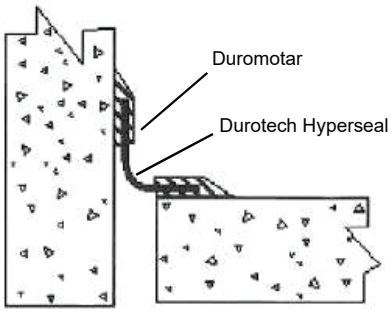

Perimeter joint - wall to floor

Address 14 Essex Street, P.O Box 5092, Minto, NSW 2566
Phone +61 2 9603 1177
Fax +61 2 9475 5059
Email sales@durotechindustries.com.au
Web www.durotechindustries.com.au



DUROTECH INDUSTRIES

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ ©

ISO 9001 Quality Certified System IQNet
ISO 1400 FC Environment Certified System IQNet
ISO 45001 Health and Safety Certified System IQNet