PRODUCT DATA SHEET

DUROTECH JOINT SEAL TAPE

TPE ELASTIC RUBBER TAPE WITH EXCELLENT SEALING PROPERTIES

DUROTECH
Engineered Construction Chemicals
Made In Australia For Over 45 Years

DESCRIPTION

Durotech joint seal tape made by TPE and additional PES fleece on both sides of tape; 20 mm elongation zone in the middle; extension in a cross direction and rigid lengthwise. Thin and additional PES non-woven on the top allow better bonding.

APPLICATIONS

For permanent sealing of various junctions and cracks in common with embbading materials, underneath ceramic tiles or natural stones, in outdoor or indoor construction parties like, bathrooms, showers, swimming pools, balconies, terraces etc. It's highly resistant on hydrostatic pressure and vapor permeable, tear proof and chemical resistant. Very good behaviour on temperature differences.

CHEMICAL PROPERTIES

Hydrochloric acid	Resistant
Sulphuric acid	Resistant
Citric acid 100 g/l	Resistant
Lactic acid 5%	Resistant
Potassium hydroxide 3	Resistant
Sodium hypochlorite 0,3 g/l	Resistant
Salt water NaCl (20 g/l)	Resistant
KOH 3% 40˚c – 28 days	Resistant

PACKING

50 m roll

TECHNICAL INFORMATION

Substrate	50g PES non-woven
Sealing zone	TPE (ageing resistant)
Colour	Grey
Total width	120mm
Sealing zone	70mm
Elongation middle zone	20mm
Thickness	0.60mm
Temperature resistante	-30˚C / +90˚C
Breaking load longitudinal	12 N/20 mm
Breaking load lateral	11 N/20 mm
Tensile strength longitudinal	1.3 Mpa
Breaking strength lateral	1.1 Mpa
Extension break longitudinal	270%
Extension break longitudinal	60%
Power absorption at 25% elast. lateral	40 J/m2
Power absorption at 50% elast. lateral	111 J/m2
Water pressure resistant	>1.5 bar
UV-resistance	500 hours

SINCE 1977

HOW TO APPLY

The base needs to be stable, dry, free of dust and dirt as well as other components which reducing adhesion and loose particles. Spots and gravel nests has to be filled with appropriate repair systems. Separating components, such as cement paste, loose coatings on the surface are to be removed by means of appropriate measures like sandblasting, knocking off etc. Mix the adhesive or mortar with appropriate device according to the manufacturer instructions. Then apply the ready mix by means of a flat bristle brush or radiator brush to the base until saturation.

Cut the sealing tape to the required length and place onto the fresh sealing compound and press the edge of the substrate on the surface using a spatula or smoothening towel so that adhesive or mortar completely penetrates the substrate.

Ensure that there is a tape overlap of at least 5 cm. Use a smoothing trowel to level out any uneven areas or distortions. Apply two or three coats and ensure that the tape is fully covered with the sealing compound. For corner areas use prefabricated internal / external corners.




STORAGE

It has to be storage on a dry and cool place, not to expose to direct sun light. Use the tape within 24 months after receipt.

INTERNAL / EXTERNAL CORNERS

Prefabricated internal / external corners made from thermoplastic elastomer and polypropylane non-woven fleece for permanent effective sealing of critical 90° and 270° (internal / external) corner intersections.

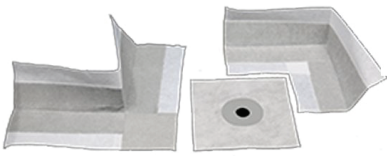

ADDITIONAL INFO

The tape ensures excellent compatibility and good adhesion with polymer dispersions, flexible mineral sealing compounds and thermosetting resins. However, it is advisable to conduct a compatibility test before applying other products.

Durotech Industries Pty Ltd

Address	14 Essex Street, P.O Box 5092, Minto, NSW 2566
Phone	+61 2 9603 1177
Fax	+61 2 9475 5059
Email	sales@durotechindustries.com.au
Web	www.durotechindustries.com.au



DUROTECH INDUSTRIES

"This document, including any attached files, is strictly confidential and intended solely for the use of the individual or entity to which it is addressed. Durotech Industries prohibits the right to publish, copy, distribute or disclose any information contained in this document, or its attachments, by any party other than the intended recipient. If you have received this document in error please notify the sender and delete it from your system immediately. no employee or agent is authorised to conclude any binding agreement or make any representation on behalf of Durotech Industries. The views or opinions presented in this document are solely those of the author and do not necessarily represent those of Durotech Industries, except where the sender expressly, and with clear authority, states them to be the views of Durotech Industries. Durotech Industries accepts no liability for any loss or damage (direct or indirect or consequential) arising from the use of or in connection with this document and any attacchments and suggests that the recipient check this document and any attached files for the presence of viruses."

JAS-ANZ

ISO 9001 Quality Certified System IQNet
ISO 1400 FC Environment Certified System IQNet
ISO 45001 Health and Safety Certified System IQNet