KodexGLOBAL Construction Chemicals

The Great Australian Chemical Company

An ISO 9001:2015, ISO 14001:2004 & ISO 18001:2007 certified Company

TECHNICAL DATA SHEET

Kodegrout C (Cementitious)

White Cement based Tile Grout

Description

kodegrout C is specially designed polymer modified cement based grout. Kodegrout C is compatible to use in grouting porcelain Tiles, glazed wall tiles, Vitrified tiles & natural stones.

Features

- Water resistant
- Dual Use (interior / exterior)
- Excellent Bonding
- Wide range of colours

Uses

- Showers
- Swimming pools
- Walls & floors (interior / exterior)
- Trafficable footpaths

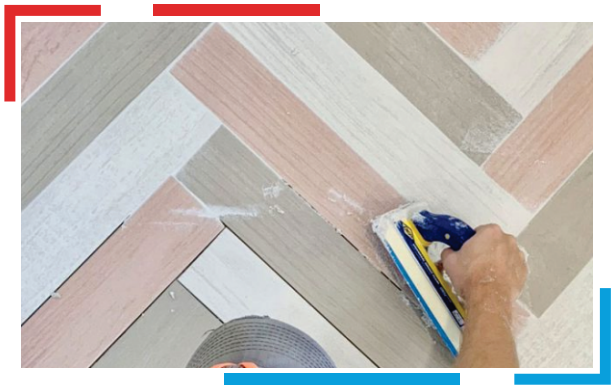

Packaging

- 1 Kg
- 10 Kg

General Technical Data

Physical Properties	Results
Joint Width	2-6mm
Pot Life	30 min
Curing time	24 hrs
Temperature resistance	-30^0 C - 180^0 C
Mixing Ratio	1:3 Water :Grout
Comprehensive Strength	Min 4.0 KN
VOC content	5:15
Water Absorption	0
Specific Gravity (wet)	1.8
Shelf life	1 year

Kodex GLOBAL
Construction Chemicals
The Great Australian Chemical Company
An ISO 9001:2015, ISO 14001:2004 & ISO 18001:2007 certified Company

TECHNICAL DATA SHEET

STANDARD COLOURS

	White/ Bright White		Black/ Midnight Black
	Ivory		Mayan Red
	Cream		Sky Blue
	Beige		Copper Brown/ Inca Gold
	Yellow		Dark Brown
	Mushroom(Dark)		Mushroom(Light)
	Pink		Antique White
	Light Green		Silver Shadow
	Dark Green/ Ivy		Sterling Silver
	Blue		Sable
	Alpine Blue		Sage
	Dark Blue		Lemon Yellow

Kodex GLOBAL Construction Chemicals

The Great Australian Chemical Company

An ISO 9001:2015, ISO 14001:2004 & ISO 18001:2007 certified Company

TECHNICAL DATA SHEET

Quarry Red	Terra Red
Almond	Burgandy
Sauterne/ Pink	Grey
Parchment	Steel Grey
Buff	Dark Grey/ Slate Grey
Mocha	Silk
Sandstone	Dusty Rose
Marble Beige	Natural Grey
Aqua Blue	Platinum
Smoke Grey	Hemp
Cadmium Red	Sierra Sunrise
Canyon Red	Saltillo

TECHNICAL DATA SHEET

Coverage

As per the standard formula

$$\frac{(\text{Tile length} + \text{Tile breadth})\text{x Tile thickness x Joint width} + \text{specific gravity}}{(\text{Tile length} + \text{Joint breadth})\text{x (Tile Breadth x Joint width)}} = \text{Kg/m}^2$$

Substrate Preparation

- Ensure all joints are cleared properly removing dirt, loose materials and any contaminants.
- Using clean water wet the joint
- Prior to grouting joint should be dry.

Mixing

Add kodegrout polymer to pre measured water in a clean vessel and mix till such time a uniform colour and lumps free smooth paste is visible. Keep speed of vessel at a slow rate to avoid entrapments air. Do not add more water.

Application

- Press the mixed grout into the joints using a squeezer or grout float making sure they are filled completely. To achieve efficiency coat in small area, removing access grout from tile surface area keeping within the working time of the grout.
- Allow approximately 15 minutes for drying time. The surface of tile should be cleaned diagonally to the joint lines using a damp sponge.
- Using clean water wash down and remove any dried grout film using a sponge.
- Once the grout has been set properly with the joints polish the surface of tiles with a clean cloth or wash with clear water.

Precaution

Wear suitable protective clothing. Wash and rinse with clean water if any skin contact made. In the event of contact with eyes rinse immediately and seek medical attention.

Shelf Life

12 months from manufacturing.

KODEX GLOBAL CONSTRUCTION CHEMICALS PVT. LTD.
E-121, Industrial Area, Phase 7, Mohali (PB)
Ph. : +91 - 172 -5096688
Email : admin@kodexglobalcc.com
Website: www.kodexglobalcc.com

Kodex GLOBAL Construction Chemicals
The Great Australian Chemical Company
An ISO 9001:2015, ISO 14001:2004 & ISO 18001:2007 certified Company

Disclaimer: The information provided in this data sheet is correct at the time of printing (albeit is subject to change at any time) and is intended to give a simple description of the product and its capabilities. In practice, intended surface to be treated and environmental conditions vary widely, making it essential for the user to determine the products suitability for a particular application and to ensure that the product is not used beyond its physical limitations. If in doubt contract the manufacturer. The product will perform as described herein provided it is applied in accordance with the manufacturer's instructions as stated in this data sheet and provided that the building and installation is structurally sound and the application is carried out competently. Kodex term and conditions of sale apply.