Configuration of Wireless LAN using CISCO packet Tracer

Exp.no : 8b

Date : 20/8/2026

Aim:

To design and configure a wireless LAN in using CISCO packet Tracer.

Configurations:

→ Configure static Ip on pc and wireless Router

→ Set SSID to mother network

→ Set Ip address of a router to 192.168.0.1, PC0 to 192.168.0.2, PC1 to 192.168.0.3 and PC2 to 192.168.0.4

→ Secure the network by configuring WAP key on Router

→ Connect PC's using WAP key

Step-by-step Instructions:

(i) Click on wireless router, select Administration tab from top menu, set username and password to admin and save setting.

(ii) Click on wireless tab and set default SSID to mother network

(iii) Now select wireless security and change security mode to WEP.

Scanned with OKEN Scanner

(iv) Set Key1 to 0123456789 and save settings

(v) Now configure the static Ip on all 3 pc's

(vi) Double click on pc select Desktop and click on Ip configuration. select static Ip and Ip as.


pc	Ip	Subnet mask	Default Gateway
pc0	192.168.0.2	255.255.255.0	192.168.0.1
pc1	192.168.0.3	255.255.255.0	192.168.0.1
pc2	192.168.0.4	255.255.255.0	192.168.0.1

(vii) Now for connecting pc's from wireless router, click pc select Desktop click on pc wireless.


(viii) click on connect tab and click on refresh button.


(ix) It will ask for WAP key, insert it and click connect, it will connect you with the wireless router.

(x) Repeat same process on pc1 and pc2

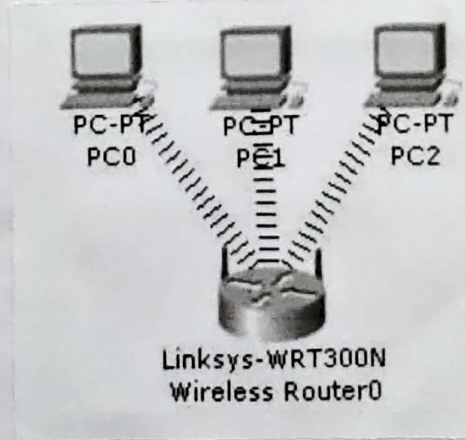


Scanned with OKEN Scanner

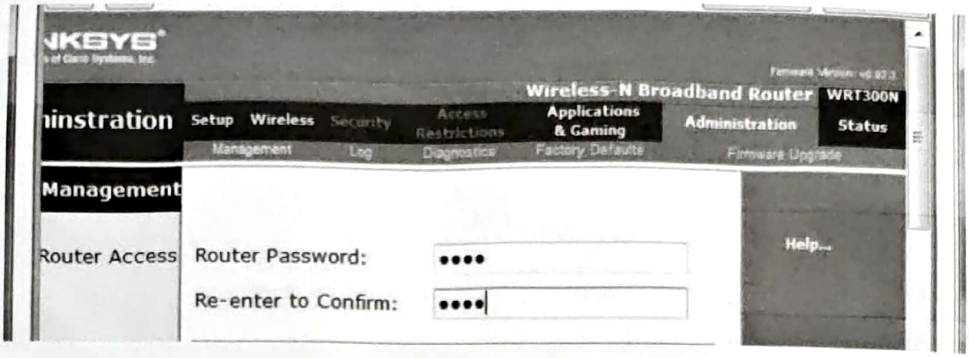


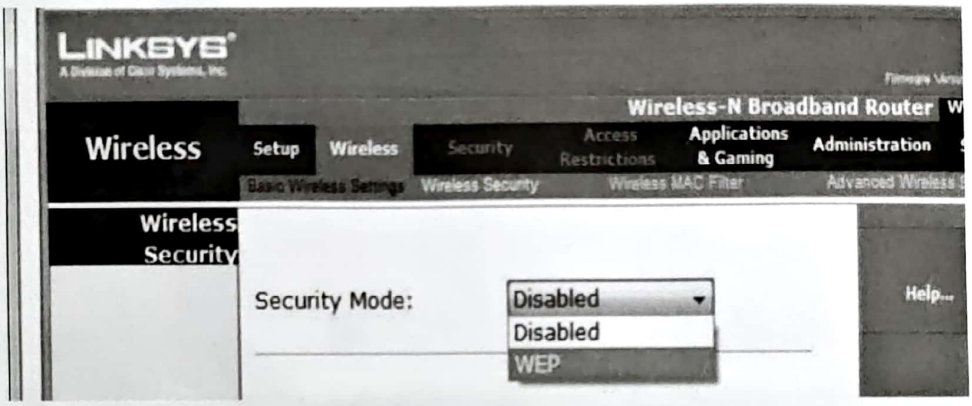



Scanned with OKEN Scanner

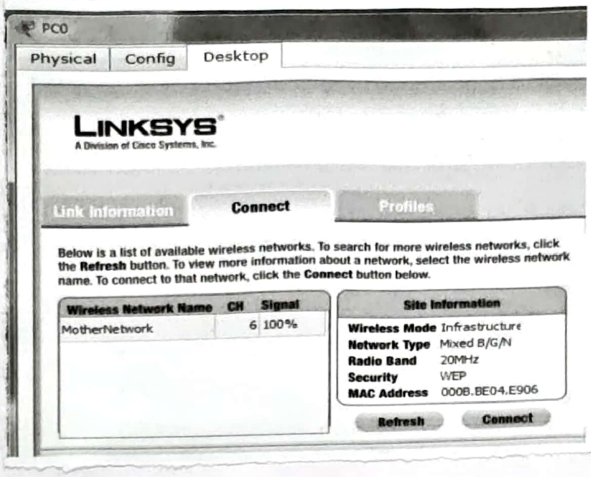

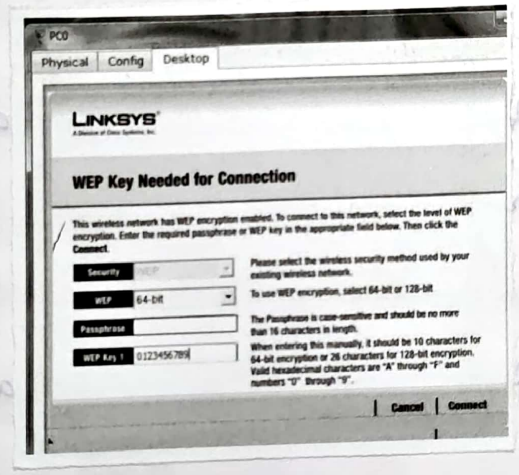

Result :

The configuration of wireless LAN has been successfully completed.