ASSIGNMENT 1

MAHENDRA ENGINEERING COLLEGE FOR WOMEN


NAME: A. Brindha

CLASS:4 YEAR ECE

SUBJECT:IBM

REGISTER NO:611419106015

DESIGN PART

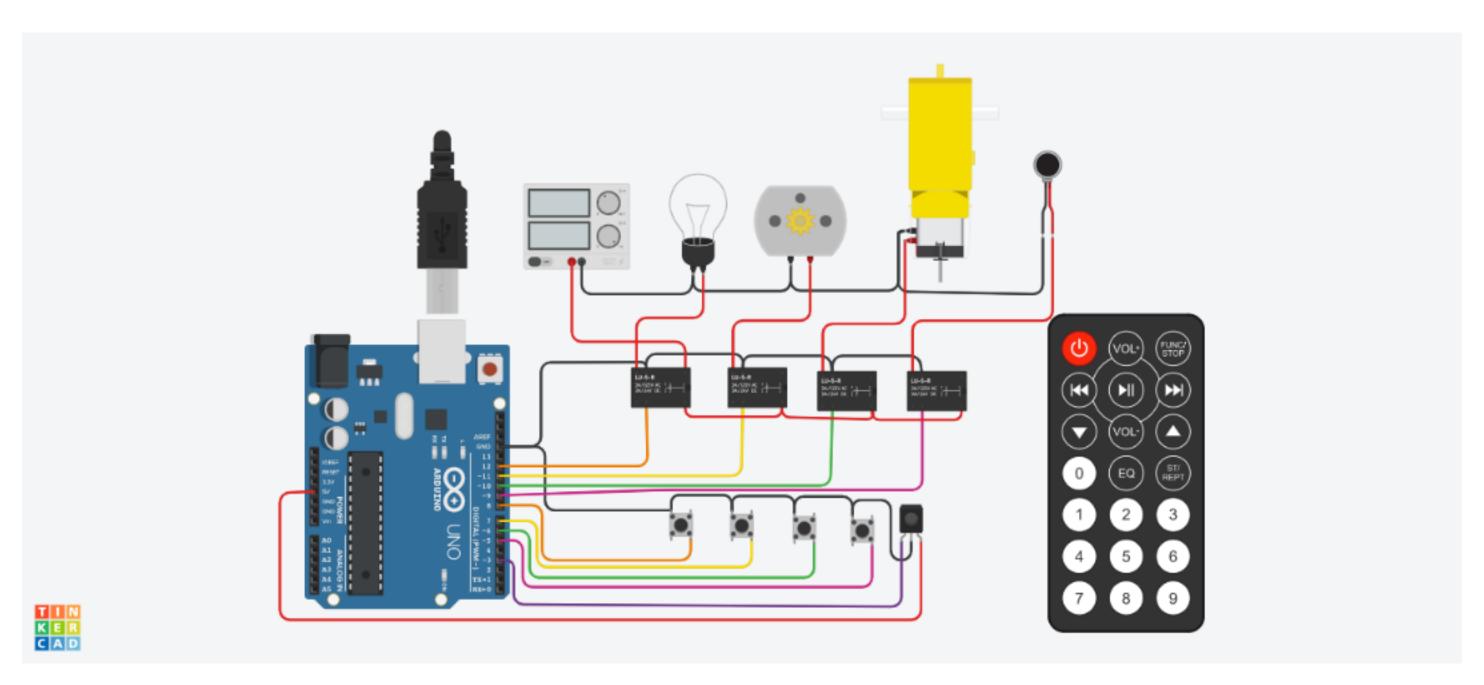

CODING PART

#include <SPI.h>

#include <Wire.h>

#include <IRremote.h>

const int relay_1 = 12;

const int relay_2 = 11;

const int relay_3 = 10;

```
const int relay_4 = 9;
const int mswitch_1 = 8;
const int mswitch_2 = 7;
const int mswitch_3 = 6;
const int mswitch_4 = 5;
int RECV_PIN = 3;
IRrecv irrecv(RECV_PIN);
decode_results results;
int toggleState_1 = 0;
int toggleState_2 = 0;
int toggleState_3 = 0;
int toggleState_4 = 0;
void setup() {
 Serial.begin(9600);
 irrecv.enableIRIn();
 pinMode(relay_1, OUTPUT);
 pinMode(relay_2, OUTPUT);
 pinMode(relay_3, OUTPUT);
```

```
pinMode(relay_4, OUTPUT);
 pinMode(mswitch_1, INPUT_PULLUP);
 pinMode(mswitch_2, INPUT_PULLUP);
 pinMode(mswitch_3, INPUT_PULLUP);
 pinMode(mswitch_4, INPUT_PULLUP);
void relayOnOff(int relay){
  switch(relay){
   case 1:
      if(toggleState_1 == 0){
       digitalWrite(relay_1, HIGH); // turn on relay 1
       toggleState_1 = 1;
       else{
       digitalWrite(relay_1, LOW); // turn off relay 1
       toggleState_1 = 0;
      delay(100);
   break;
   case 2:
      if(toggleState_2 == 0){
       digitalWrite(relay_2, HIGH); // turn on relay 2
       toggleState_2 = 1;
```

```
else{
    digitalWrite(relay_2, LOW); // turn off relay 2
    toggleState_2 = 0;
   delay(100);
break;
case 3:
   if(toggleState_3 == 0){
    digitalWrite(relay_3, HIGH); // turn on relay 3
    toggleState_3 = 1;
    }else{
    digitalWrite(relay_3, LOW); // turn off relay 3
    toggleState_3 = 0;
    delay(100);
break;
case 4:
   if(toggleState_4 == 0){
    digitalWrite(relay_4, HIGH); // turn on relay 4
    toggleState_4 = 1;
    else{
    digitalWrite(relay_4, LOW); // turn off relay 4
    toggleState_4 = 0;
   delay(100);
break;
```

```
default : break;
void loop() {
  if (digitalRead(mswitch_1) == LOW){
   delay(200);
   relayOnOff(1);
  else if (digitalRead(mswitch_2) == LOW){
   delay(200);
   relayOnOff(2);
  else if (digitalRead(mswitch_3) == LOW){
   delay(200);
   relayOnOff(3);
  else if (digitalRead(mswitch_4) == LOW){
   delay(200);
   relayOnOff(4);
   if (irrecv.decode(&results)) {
```

```
switch(results.value){
   case 0xFD08F7:
        relayOnOff(1);
   break;
   case 0xFD8877:
        relayOnOff(2);
   break;
   case 0xFD48B7:
        relayOnOff(3);
   break;
   case 0xFD28D7:
        relayOnOff(4);
   break;
   default : break;
irrecv.resume();
```