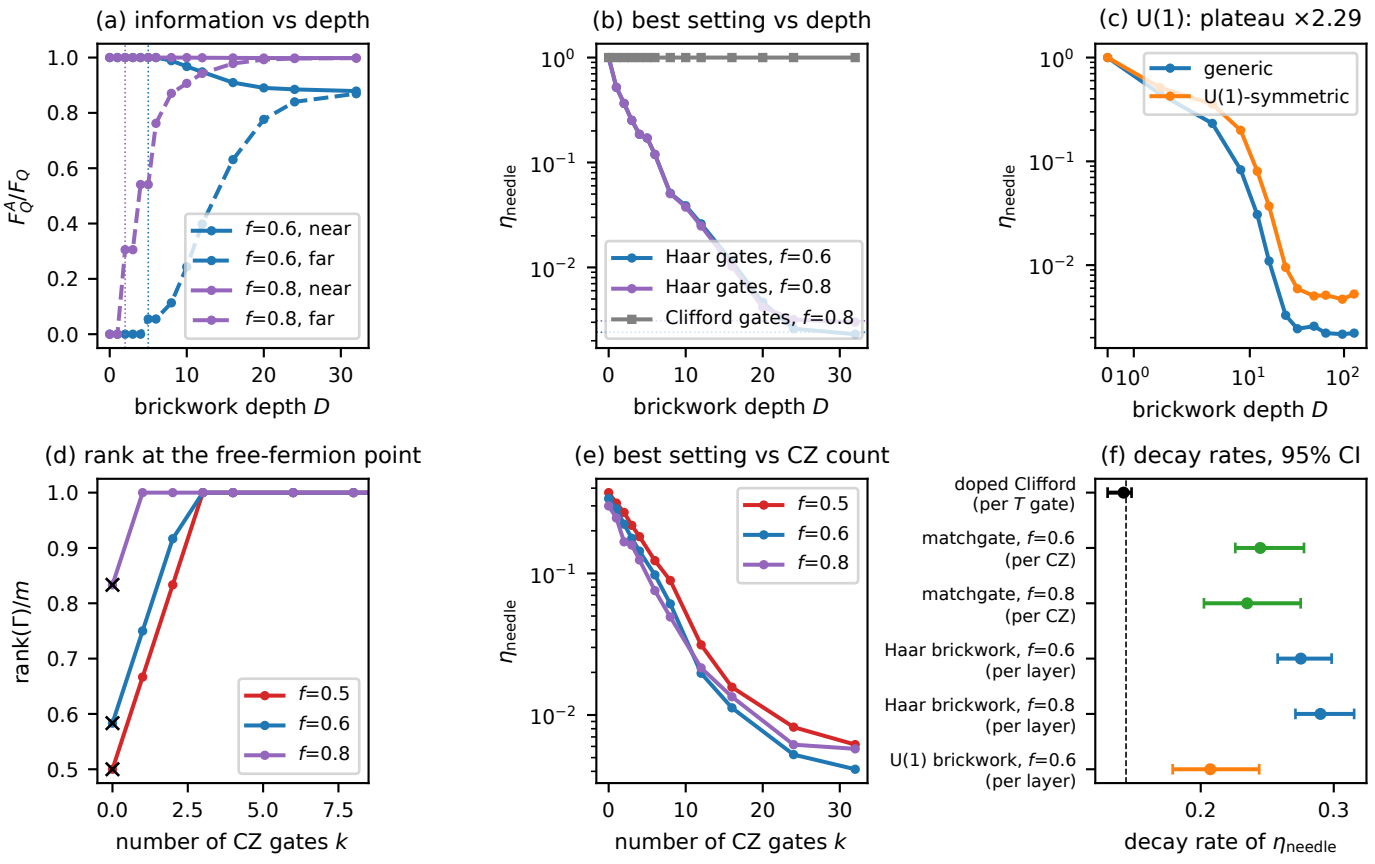

(a) information vs depth
F_Q^A/F_Q
brickwork depth D
f=0.6, near
f=0.6, far
f=0.8, near
f=0.8, far
(b) best setting vs depth
η_{needle}
brickwork depth D
Haar gates, f=0.6
Haar gates, f=0.8
Clifford gates, f=0.8
(c) U(1): plateau ×2.29
η_{needle}
brickwork depth D
generic
U(1)-symmetric
(d) rank at the free-fermion point
rank(Γ)/m
number of CZ gates k
f=0.5
f=0.6
f=0.8
(e) best setting vs CZ count
η_{needle}
number of CZ gates k
f=0.5
f=0.6
f=0.8
(f) decay rates, 95% CI
doped Clifford (per T gate)
matchgate, f=0.6 (per CZ)
matchgate, f=0.8 (per CZ)
Haar brickwork, f=0.6 (per layer)
Haar brickwork, f=0.8 (per layer)
U(1) brickwork, f=0.6 (per layer)
decay rate of η_{needle}