



### AZ1117

#### 1A LOW DROPOUT LINEAR REGULATOR

### Description

The AZ1117 is a series of low dropout three-terminal regulators with a dropout of 1.15V at 1A output current.

The AZ1117 series provides current limiting and thermal shutdown. Its circuit includes a trimmed bandgap reference to assure output voltage accuracy to be within 1% for 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V and adjustable versions or 2% for 1.2V version. Current limit is trimmed to ensure specified output current and controlled short-circuit current. On-chip thermal shutdown provides protection against any combination of overload and ambient temperature that would create excessive junction temperature.

The AZ1117 has an adjustable version, which can provide the output voltage from 1.25V to 12V with only 2 external resistors.

The AZ1117 series is available in the industry standard SOT223, SOT89, TO220-3, TO252-2 (3), TO252-2 (4), TO252-2 (5) and TO263 power packages.

#### **Features**

- Low Dropout Voltage: 1.15V at 1A Output Current
- Trimmed Current Limit
- · On-chip Thermal Shutdown
- Three-terminal Adjustable or Fixed 1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V, 5.0V
- Operation Junction Temperature: -40 to +125°C
- Lead-Free Packages: SOT223, SOT89, TO220-3, TO252-2 (3), TO252-2 (4), TO252-2 (5), TO263
- Totally Lead-Free; RoHS Compliant (Notes 1 & 2)


### **Applications**

- PC Motherboard
- LCD Monitor
- Graphic Card
- DVD-video Player
- NIC/Switch
- Telecom Equipment
- ADSL Modem
- Printer and other Peripheral Equipment

Notes:


- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS) & 2011/65/EU (RoHS 2) compliant.
- See http://www.diodes.com/quality/lead\_free.html for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.

## **Pin Assignments**

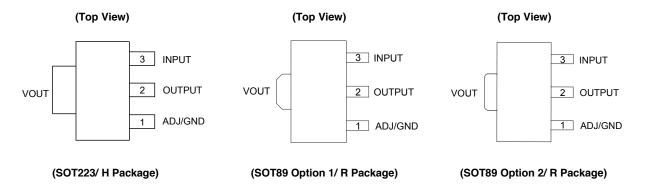



#### Pin Assignments (Cont.)

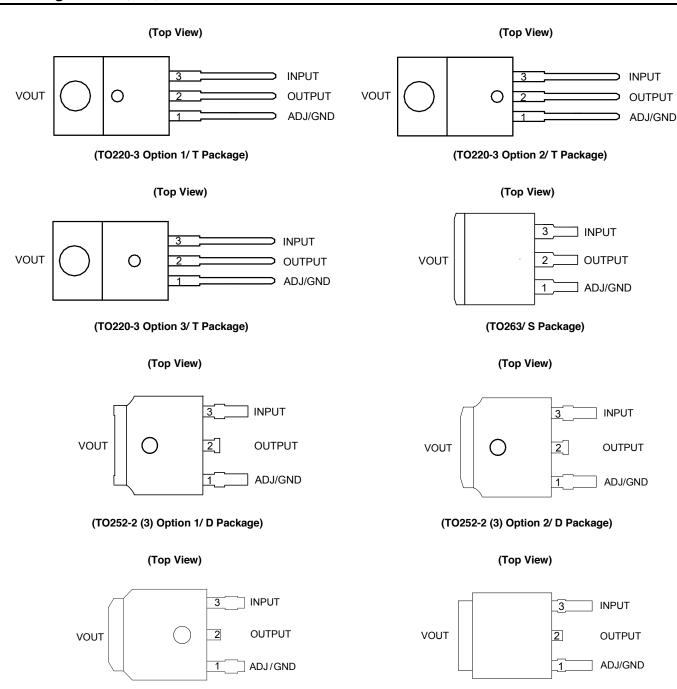


(TO252-2 (4)/ D Package)


(TO252-2 (5)/ D Package)



# **Typical Applications Circuit**

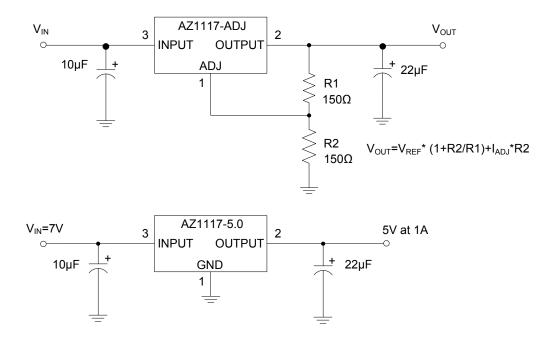

## **Functional Block Diagram**

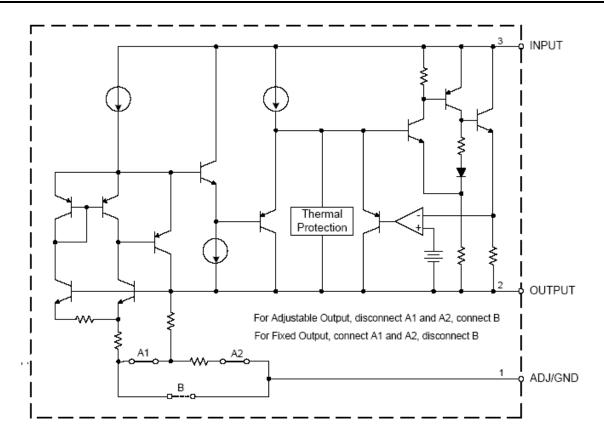



## **Absolute Maximum Ratings** (Note 3)

Parameter	Symbol	Value	•	Unit
Input Voltage	V <sub>IN</sub>	20		٧
Operating Junction Temperature	TJ	+150		°C
Storage Temperature	T <sub>S</sub>	-65 to +	150	°C
Lead Temperature (Soldering, 10sec)	T <sub>LEAD</sub>	+260		°C
		SOT223	120	
		SOT89	165	
Thermal Resistance (No Heatsink, Note 4)	$ heta_{JA}$	TO220-3	60	°C/W
Thermal Nesistance (No Fleatslink, Note 4)	OJA	TO252-2 (3) TO252-2 (4) 100 TO252-2 (5)		5/11
		TO263	60	
ESD (Human Body Model)	ESD	2000		٧
ESD (Machine Model)	ESD	250		V

Notes:

- 3. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.
- 4. Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its operating ratings. The maximum allowable power dissipation is a function of the maximum junction temperature, T<sub>J(max)</sub>, the junction-to-ambient thermal resistance, θ<sub>JA</sub>, and the ambient temperature, T<sub>A</sub>. The maximum allowable power dissipation at any ambient temperature is calculated using: P<sub>D(max)</sub> = (T<sub>J(max)</sub>-T<sub>A</sub>)/θ<sub>JA</sub>. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.

## **Recommended Operating Conditions**

Parameter	Symbol	Min	Max	Unit
Input Voltage	V <sub>IN</sub>	-	15	V
Operating Junction Temperature Range	TJ	-40	+125	°C



# **Electrical Characteristics**

# **AZ1117-ADJ Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Reference Voltage	V <sub>REF</sub>	$I_{OUT} = 10$ mA, $V_{IN}$ - $V_{OUT} = 2$ V $10$ mA $\leq I_{OUT} \leq 1$ A, $1.4$ V $\leq V_{IN}$ - $V_{OUT} \leq 8$ V, $P \leq Maximum Power Dissipation$	1.238 1.225	1.250 1.250	1.262 1.270	V
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	-	0.035	0.2	%
Load Regulation	$\Delta V_{OUT}$	$V_{IN}$ - $V_{OUT}$ = 2V, 10mA $\leq I_{OUT} \leq$ 1A	1	0.2	0.4	%
		ΔV <sub>REF</sub> = 1%, I <sub>OUT</sub> = 0.1A	1	1.00	1.1	>
Dropout Voltage	$V_{DROP}$	$\Delta V_{REF}$ = 1%, $I_{OUT}$ = 0.5A	1	1.08	1.18	>
		$\Delta V_{REF}$ = 1%, $I_{OUT}$ = 1.0A	ı	1.15	1.25	>
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Adjust Pin Current	I <sub>ADJ</sub>	-	_	60	120	μA
Adjust Pin Current Change	$\Delta I_{ADJ}$	$1.4V \le V_{IN}-V_{OUT} \le 10V$ , $10mA \le I_{OUT} \le 1A$	_	0.2	5	μA
Minimum Load Current (ADJ)	I <sub>LOAD</sub> (MIN)	$1.5V \le V_{IN}-V_{OUT} \le 10V \text{ (ADJ only)}$	_	1.7	5	mA
Quiescent Current	lQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	$f$ = 120Hz, $C_{OUT}$ = 22 $\mu$ F Tantalum, $V_{IN}$ - $V_{OUT}$ = 3V, $I_{OUT}$ = 1A	60	75	_	dB
Temperature Stability	-	_	_	0.5	-	%
Long-term Stability	-	T <sub>A</sub> = +125°C, 1000hrs	1	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	ı	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz	1	0.003	-	%
Thermal Shutdown	ı	Junction Temperature	ı	+150	-	°C
Thermal Shutdown Hysteresis	-	_	-	+25	_	°C
		SOT223	_	25	-	
		SOT89	_	30	_	
Thermal Resistance	θјс	TO220-3	-	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	ı	17	_	
		TO263	_	10	_	



# **AZ1117-1.2 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10\text{mA}, V_{IN} = 3.2V$ $10\text{mA} \le I_{OUT} \le 1\text{A}, 3.0V \le V_{IN} \le 10V$	1.176 1.152	1.2 1.2	1.224 1.248	V
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	$\Delta V_{OUT}$ $V_{IN}-V_{OUT} = 2V$ , $10mA \le I_{OUT} \le 1A$		1	10	mV
		ΔV <sub>OUT</sub> = 1%, I <sub>OUT</sub> = 0.1A	_	1.00	1.1	V
Dropout Voltage	$V_{DROP}$	$\Delta V_{OUT} = 1\%, I_{OUT} = 0.5A$	_	1.08	1.18	V
		ΔV <sub>OUT</sub> = 1%, I <sub>OUT</sub> = 1.0A	_	1.15	1.25	V
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	IQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	$f = 120$ Hz, $C_{OUT} = 22\mu$ F Tantalum, $V_{IN}$ - $V_{OUT} = 3V$ , $I_{OUT} = 1$ A	60	75	_	dB
Temperature Stability	-	-	_	0.5	_	%
Long-term Stability	-	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	-	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz		0.003	_	%
Thermal Shutdown	-	Junction Temperature	_	+150	_	°C
Thermal Shutdown Hysteresis	-	-	_	+25	_	°C
		SOT223	-	25	_	
		SOT89	_	30	_	
Thermal Resistance	$\theta_{JC}$	TO220-3	_	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	_	17	_	
		TO263	_	10	_	



# **AZ1117-1.5 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10$ mA, $V_{IN} = 3.5$ V $10$ mA $\leq I_{OUT} \leq 1$ A, $3.0$ V $\leq V_{IN} \leq 10$ V	1.485 1.470	1.5 1.5	1.515 1.530	٧
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}$ - $V_{OUT}$ = 2V, 10mA $\leq I_{OUT} \leq 1$ A	_	1	10	mV
		$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.1A$	_	1.00	1.1	٧
Dropout Voltage	V <sub>DROP</sub>	$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.5A$	-	1.08	1.18	٧
		$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 1.0A$	-	1.15	1.25	٧
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	ΙQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	$f = 120Hz$ , $C_{OUT} = 22\mu F$ Tantalum, $V_{IN}$ - $V_{OUT} = 3V$ , $I_{OUT} = 1A$	60	75	_	dB
Temperature Stability	_	-	_	0.5	_	%
Long-term Stability	_	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	_	$T_A = +25^{\circ}C$ , $10Hz \le f \le 10kHz$	-	0.003	-	%
Thermal Shutdown	_	Junction Temperature	-	+150	-	°C
Thermal Shutdown Hysteresis	_	-	_	+25	_	°C
		SOT223	-	25	_	
		SOT89	-	30	_	
Thermal Resistance	θ <sub>JC</sub>	TO220-3	_	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	_	17	_	
		TO263	_	10	_	



# **AZ1117-1.8 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10$ mA, $V_{IN} = 3.8$ V $10$ mA $\leq I_{OUT} \leq 1$ A, $3.2$ V $\leq V_{IN} \leq 10$ V	1.782 1.746	1.8 1.8	1.818 1.854	V
Line Regulation	$\Delta V_{OUT}$	$I_{OUT}$ =10mA, 1.5V $\leq V_{IN}$ - $V_{OUT} \leq$ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}$ - $V_{OUT}$ = 2V, 10mA $\leq I_{OUT} \leq 1$ A	_	1	10	mV
		$\Delta V_{OUT} = 1\%, I_{OUT} = 0.1A$	_	1.00	1.1	٧
Dropout Voltage	V <sub>DROP</sub>	$\Delta V_{OUT} = 1\%, I_{OUT} = 0.5A$	_	1.08	1.18	٧
		$\Delta V_{OUT} = 1\%, I_{OUT} = 1.0A$	_	1.15	1.25	٧
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	IQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	-	5	10	mA
Ripple Rejection	PSRR	$f = 120$ Hz, $C_{OUT} = 22\mu$ F Tantalum, $V_{IN}$ - $V_{OUT} = 3V$ , $I_{OUT} = 1$ A	60	75	_	dB
Temperature Stability	_	_	_	0.5	_	%
Long-term Stability	_	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	-	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz	_	0.003	-	%
Thermal Shutdown	-	Junction Temperature	_	+150	-	°C
Thermal Shutdown Hysteresis	_	-	_	+25	_	°C
		SOT223	-	25	_	
		SOT89	-	30	_	
Thermal Resistance	$\theta_{JC}$	TO220-3	-	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	-	17	_	
		TO263	_	10	_	



# **AZ1117-2.5 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10\text{mA}, V_{IN} = 4.5\text{V}$ $10\text{mA} \le I_{OUT} \le 1\text{A}, 3.9\text{V} \le V_{IN} \le 10\text{V}$	2.475 2.450	2.5 2.5	2.525 2.550	V
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	V <sub>IN</sub> -V <sub>OUT</sub> = 2V, 10mA ≤ I <sub>OUT</sub> ≤ 1A	_	1	10	mV
		ΔV <sub>OUT</sub> = 1%, I <sub>OUT</sub> = 0.1A	_	1.00	1.1	V
Dropout Voltage	V <sub>DROP</sub>	$\Delta V_{OUT}$ = 1%, $I_{OUT}$ = 0.5A	_	1.08	1.18	V
		$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 1.0A$	_	1.15	1.25	<b>V</b>
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	IQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	$f$ = 120Hz, $C_{OUT}$ = 22μF Tantalum, $V_{IN}$ - $V_{OUT}$ = 3V, $I_{OUT}$ = 1A	60	75	_	dB
Temperature Stability	_	-	_	0.5	_	%
Long-term Stability	_	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	-	%
RMS Output Noise (% of V <sub>OUT</sub> )	_	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz	_	0.003	-	%
Thermal Shutdown	_	Junction Temperature	_	+150	-	°C
Thermal Shutdown Hysteresis	_	-	_	+25	_	ô
		SOT223	_	25	_	
		SOT89	_	30	_	
Thermal Resistance	θЈС	TO220-3	-	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	-	17	_	
		TO263	_	10	_	



# **AZ1117-2.85 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	Vout	$I_{OUT} = 10$ mA, $V_{IN} = 4.85$ V $10$ mA $\leq I_{OUT} \leq 1$ A, $4.25$ V $\leq V_{IN} \leq 10$ V	2.822 2.793	2.85 2.85	2.878 2.907	V
Line Regulation	$\Delta V_{OUT}$	$I_{OUT}$ =10mA, 1.5V $\leq$ V <sub>IN</sub> -V <sub>OUT</sub> $\leq$ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}$ - $V_{OUT}$ = 2V, 10mA $\leq I_{OUT} \leq$ 1A	_	1	10	mV
		$\Delta V_{REF}$ = 1%, $I_{OUT}$ = 0.1A	_	1.00	1.1	٧
Dropout Voltage	$V_{DROP}$	$\Delta V_{REF}$ = 1%, $I_{OUT}$ = 0.5A	-	1.08	1.18	٧
		$\Delta V_{REF}$ = 1%, $I_{OUT}$ = 1.0A	-	1.15	1.25	٧
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	lα	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	-	5	10	mA
Ripple Rejection	PSRR	$f = 120$ Hz, $C_{OUT} = 22\mu F$ Tantalum, $V_{IN}$ - $V_{OUT} = 3V$ , $I_{OUT} = 1A$	60	75	_	dB
Temperature Stability	_	-	_	0.5	_	%
Long-term Stability	-	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	ı	$T_A = +25^{\circ}C$ , $10Hz \le f \le 10kHz$	-	0.003	-	%
Thermal Shutdown	-	Junction Temperature	-	+150	_	°C
Thermal Shutdown Hysteresis	-	-	-	+25	_	°C
		SOT223	-	25	_	
		SOT89	_	30	_	
Thermal Resistance	$\theta_{JC}$	TO220-3	-	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	-	17	_	
		TO263	_	10	_	



# **AZ1117-3.3 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10\text{mA}, V_{IN} = 5.0\text{V}$ $10\text{mA} \le I_{OUT} \le 1\text{A}, 4.75\text{V} \le V_{IN} \le 10\text{V}$	3.267 3.235	3.3 3.3	3.333 3.365	V
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	_	1	6	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}-V_{OUT} = 2V$ , $10mA \le I_{OUT} \le 1A$	_	1	10	mV
		$\Delta V_{OUT} = 1\%, I_{OUT} = 0.1A$	_	1.00	1.1	V
Dropout Voltage	$V_{DROP}$	$\Delta V_{OUT} = 1\%, I_{OUT} = 0.5A$	_	1.08	1.18	V
		ΔV <sub>OUT</sub> = 1%, I <sub>OUT</sub> = 1.0A	_	1.15	1.25	V
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	IQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	f = 120Hz, C <sub>OUT</sub> = 22μF Tantalum, V <sub>IN</sub> -V <sub>OUT</sub> = 3V, I <sub>OUT</sub> = 1A		75	_	dB
Temperature Stability	_	-	_	0.5	-	%
Long-term Stability	-	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	ı	%
RMS Output Noise (% of V <sub>OUT</sub> )	1	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz	_	0.003	ı	%
Thermal Shutdown	-	Junction Temperature	_	+150	-	°C
Thermal Shutdown Hysteresis	-	-	_	+25	-	°C
		SOT223	_	25	_	
		SOT89	_	30	_	
Thermal Resistance	$\theta_{JC}$	TO220-3	-	10	-	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	-	17	-	
		TO263	_	10	_	




# **AZ1117-5.0 Electrical Characteristics** (Operating Conditions: V<sub>IN</sub> ≤ 10V, T<sub>J</sub> = +25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Тур	Max	Unit
Output Voltage	V <sub>OUT</sub>	$I_{OUT} = 10$ mA, $V_{IN} = 7.0$ V $10$ mA $\leq I_{OUT} \leq 1$ A, $6.5$ V $\leq V_{IN} \leq 12$ V	4.950 4.900	5.0 5.0	5.050 5.100	V
Line Regulation	$\Delta V_{OUT}$	I <sub>OUT</sub> =10mA, 1.5V ≤ V <sub>IN</sub> -V <sub>OUT</sub> ≤ 10V	_	1	10	mV
Load Regulation	$\Delta V_{OUT}$	$V_{IN}$ - $V_{OUT}$ = 2V, 10mA $\leq I_{OUT} \leq 1$ A	_	1	15	mV
		$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.1A$	_	1.00	1.1	٧
Dropout Voltage	$V_{DROP}$	$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 0.5A$	_	1.08	1.18	٧
		$\Delta V_{OUT} = 1\%$ , $I_{OUT} = 1.0A$	-	1.15	1.25	٧
Current Limit	I <sub>LIMIT</sub>	V <sub>IN</sub> -V <sub>OUT</sub> = 2V	1.25	1.35	_	Α
Quiescent Current	IQ	V <sub>IN</sub> = V <sub>OUT</sub> + 1.25V	_	5	10	mA
Ripple Rejection	PSRR	$f = 120$ Hz, $C_{OUT} = 22\mu F$ Tantalum, $V_{IN}$ - $V_{OUT} = 3V$ , $I_{OUT} = 1A$	60	75	_	dB
Temperature Stability	-	-	_	0.5	_	%
Long-term Stability	-	T <sub>A</sub> = +125°C, 1000hrs	_	0.3	_	%
RMS Output Noise (% of V <sub>OUT</sub> )	ı	T <sub>A</sub> = +25°C, 10Hz ≤ f ≤ 10kHz	_	0.003	-	%
Thermal Shutdown	-	Junction Temperature	_	+150	_	°C
Thermal Shutdown Hysteresis	-	-	_	+25	_	°C
		SOT223	_	25	_	
		SOT89	_	30	_	
Thermal Resistance	$\theta_{ m JC}$	TO220-3	-	10	_	°C/W
		TO252-2 (3)/TO252-2 (4)/TO252-2 (5)	-	17	_	
		TO263	_	10	_	




## **Performance Characteristics**


#### **Dropout Voltage vs. Output Current**




#### **Dropout Voltage vs. Junction Temperature**




#### Load Regulation vs. Junction Temperature




#### Reference Voltage vs. Junction Temperature



#### **Output Voltage vs. Junction Temperature**




#### Minimum Load Current vs. Junction Temperature







### **Performance Characteristics** (Cont.)

#### Adjust Pin Current vs. Junction Temperature




#### **Maximum Power Dissipation**







#### **Short-circuit Current vs. Junction Temperature**



Ripple Rejection vs. Frequency




Load Transient Response (Conditions:  $V_{IN} = 4.8V$ ,  $V_{OUT} = 3.33V$ ,  $I_{OUT} = 0.1$  to 0.5A,  $C_{IN} = C_{OUT} = 10\mu F$ )





## **Ordering Information**

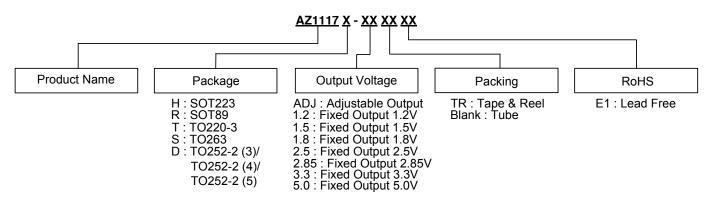

Package	Temperature Range	Part Number	Marking ID	Packing
	-40 to +125°C	AZ1117H-ADJTRE1	EH11A	4000/Tape & Reel
	-40 to +125°C	AZ1117H-1.2TRE1	EH18A	4000/Tape & Reel
	-40 to +125°C	AZ1117H-1.5TRE1	EH12A	4000/Tape & Reel
SOT223	-40 to +125°C	AZ1117H-1.8TRE1	EH13A	4000/Tape & Reel
(Note 5)	-40 to +125°C	AZ1117H-2.5TRE1	EH14A	4000/Tape & Reel
	-40 to +125°C	AZ1117H-2.85TRE1	EH15A	4000/Tape & Reel
	-40 to +125°C	AZ1117H-3.3TRE1	EH16A	4000/Tape & Reel
	-40 to +125°C	AZ1117H-5.0TRE1	EH17A	4000/Tape & Reel
	-40 to +125°C	AZ1117R-ADJTRE1	E17A	1000/Tape & Reel
	-40 to +125°C	AZ1117R-1.2TRE1	E17G	1000/Tape & Reel
	-40 to +125°C	AZ1117R-1.5TRE1	E17B	1000/Tape & Reel
SOT89	-40 to +125°C	AZ1117R-1.8TRE1	E17C	1000/Tape & Reel
(Note 6)	-40 to +125°C	AZ1117R-2.5TRE1	E17D	1000/Tape & Reel
	-40 to +125°C	AZ1117R-2.85TRE1	E17H	1000/Tape & Reel
	-40 to +125°C	AZ1117R-3.3TRE1	E17E	1000/Tape & Reel
	-40 to +125°C	AZ1117R-5.0TRE1	E17F	1000/Tape & Reel
	-40 to +125°C	AZ1117T-ADJE1	AZ1117T-ADJE1	50/Tube
	-40 to +125°C	AZ1117T-1.2E1	AZ1117T-1.2E1	50/Tube
	-40 to +125°C	AZ1117T-1.5E1	AZ1117T-1.5E1	50/Tube
T0000 0	-40 to +125°C	AZ1117T-1.8E1	AZ1117T-1.8E1	50/Tube
TO220-3	-40 to +125°C	AZ1117T-2.5E1	AZ1117T-2.5E1	50/Tube
	-40 to +125°C	AZ1117T-2.85E1	AZ1117T-2.85E1	50/Tube
	-40 to +125°C	AZ1117T-3.3E1	AZ1117T-3.3E1	50/Tube
	-40 to +125°C	AZ1117T-5.0E1	AZ1117T-5.0E1	50/Tube



# Ordering Information (Cont.)

Package	Temperature Range	Part Number	Marking ID	Packing
	-40 to +125°C	AZ1117D-ADJTRE1	AZ1117D-ADJE1	2500/Tape & Reel
	-40 to +125°C	AZ1117D-1.2TRE1	AZ1117D-1.2E1	2500/Tape & Reel
	-40 to +125°C	AZ1117D-1.5TRE1	AZ1117D-1.5E1	2500/Tape & Reel
TO252-2 (3)/(4)/(5)	-40 to +125°C	AZ1117D-1.8TRE1	AZ1117D-1.8E1	2500/Tape & Reel
(Note 5)	-40 to +125°C	AZ1117D-2.5TRE1	AZ1117D-2.5E1	2500/Tape & Reel
	-40 to +125°C	AZ1117D-2.85TRE1	AZ1117D-2.85E1	2500/Tape & Reel
	-40 to +125°C	AZ1117D-3.3TRE1	AZ1117D-3.3E1	2500/Tape & Reel
	-40 to +125°C	AZ1117D-5.0TRE1	AZ1117D-5.0E1	2500/Tape & Reel
	-40 to +125°C	AZ1117S-ADJTRE1	AZ1117S-ADJE1	800/Tape & Reel
	-40 to +125°C	AZ1117S-1.2TRE1	AZ1117S-1.2E1	800/Tape & Reel
	-40 to +125°C	AZ1117S-1.5TRE1	AZ1117S-1.5E1	800/Tape & Reel
TO263	-40 to +125°C	AZ1117S-1.8TRE1	AZ1117S-1.8E1	800/Tape & Reel
10263	-40 to +125°C	AZ1117S-2.5TRE1	AZ1117S-2.5E1	800/Tape & Reel
	-40 to +125°C	AZ1117S-2.85TRE1	AZ1117S-2.85E1	800/Tape & Reel
	-40 to +125°C	AZ1117S-3.3TRE1	AZ1117S-3.3E1	800/Tape & Reel
	-40 to +125°C	AZ1117S-5.0TRE1	AZ1117S-5.0E1	800/Tape & Reel

Notes:


- 5. Not recommended for new design, please use AZ1117I.
- 6. Not recommended for new design, please use AZ1117C.



## **Marking Information**

#### (1) SOT223 Series

(Top View)



First Line: Logo and Marking ID (See Ordering

Information)

Second Line: Date Code


Y: Year

WW: Work Week of Molding A: Assembly House Code

XX: 7th and 8th Digits of Batch Number

#### (2) TO252-2 Series

(Top View)



First and Second Lines: Logo and Marking ID

(See Ordering Information)
Third Line: Date Code


Y: Year

WW: Work Week of Molding A: Assembly House Code

XX: 7th and 8th Digits of Batch Number

#### (3) SOT89

(Top View)



First Line: Logo and Marking ID (See Ordering

Information)

Second Line: Date Code

Y: Year

WW: Work Week of Molding A: Assembly House Code


XX: 7th and 8th Digits of Batch Number



## Marking Information (Cont.)

(4) TO220-3

(Top View)

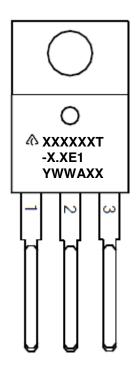

First and Second Lines: Logo and Marking ID

(See Ordering Information)
Third Line: Date Code


Y: Year

WW: Work Week of Molding A: Assembly House Code

XX: 7th and 8th Digits of Batch Number

(5) TO263

(Top View)



First and Second Lines: Logo and Marking ID

(See Ordering Information)
Third Line: Date Code


Y: Year


WW: Work Week of Molding A: Assembly House Code

XX: 7th and 8th Digits of Batch Number




#### (1) Package Type: SOT223

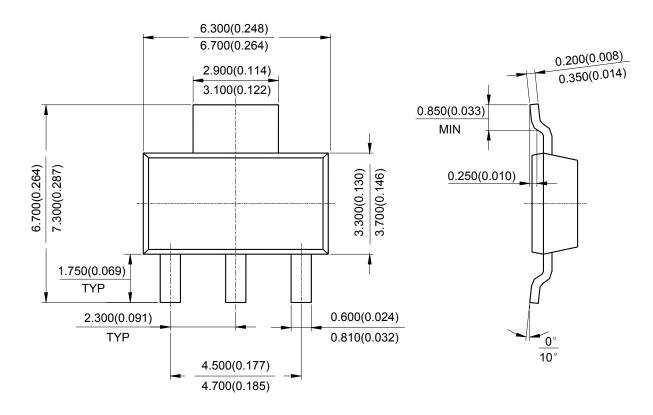









#### (2) Package Type: SOT89















#### (3) Package Type: TO252-2 (3)

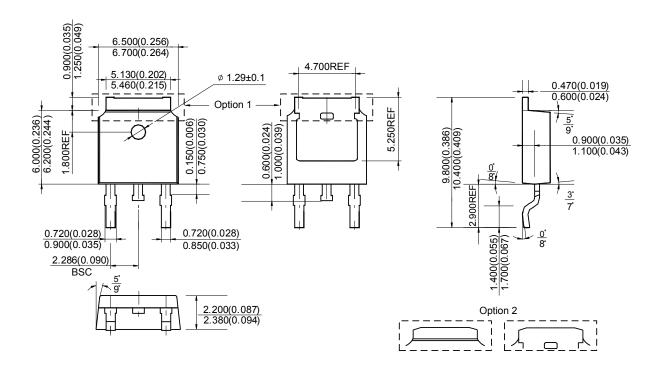




#### (4) Package Type: TO252-2 (4)

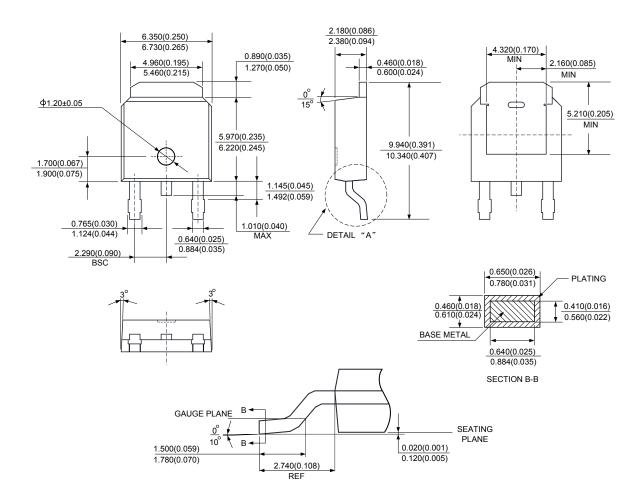




#### (5) Package Type: TO252-2 (5)

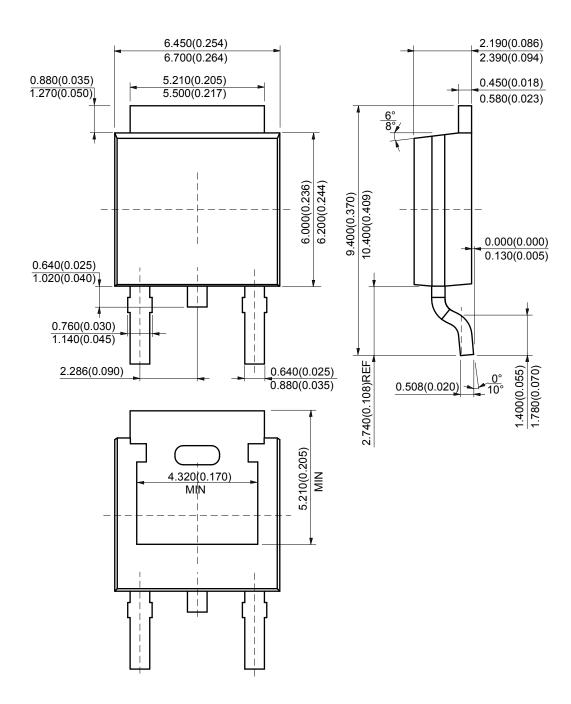





#### (6) Package Type: TO220-3

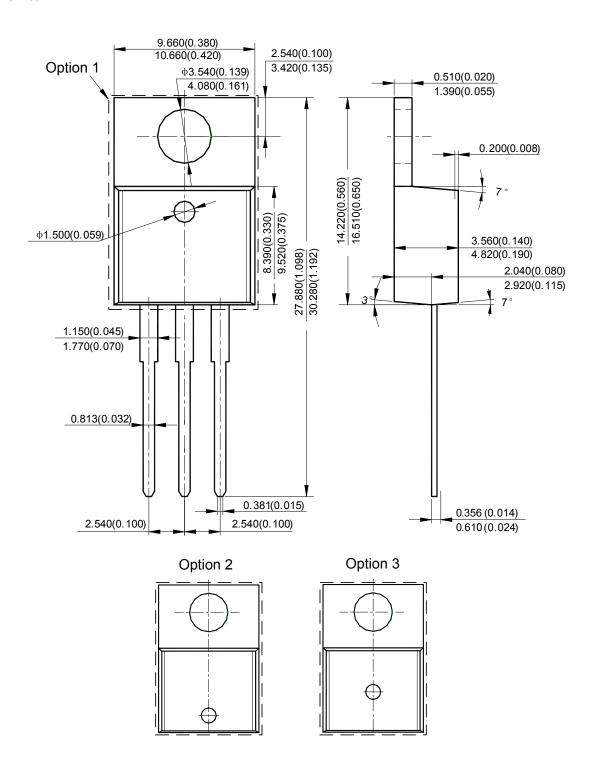




#### (7) Package Type: TO263

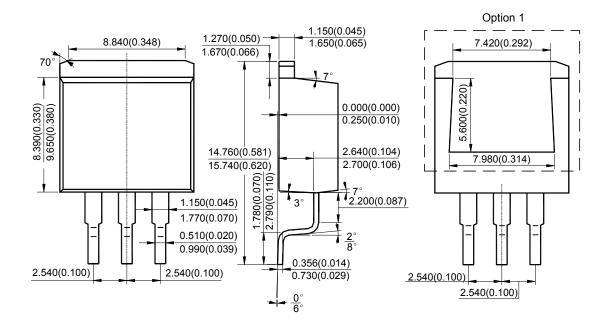








# **Suggested Pad Layout**


### (1) Package Type: SOT223

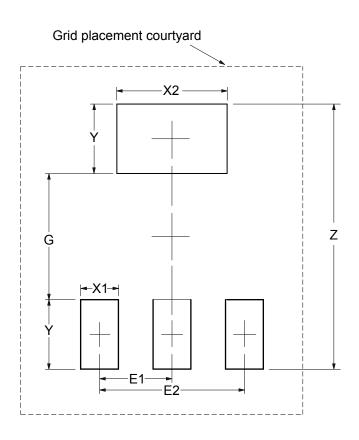

Dimensions	Z	G	X1	X2	Υ	E1	E2
	(mm)/(inch)						
Value	8.400/0.331	4.000/0.157	1.200/0.047	3.500/0.138	2.200/0.087	2.300/0.091	4.600/0.181




### (2) Package Type: SOT89

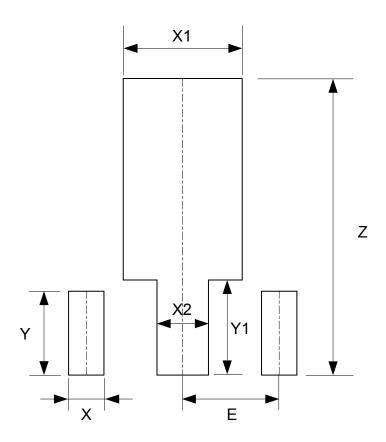

Dimensions	Z	Χ	X1	X2	Y	Y1	Е
	(mm)/(inch)						
Value	4.600/0.181	0.550/0.022	1.850/0.073	0.800/0.031	1.300/0.051	1.475/0.058	1.500/0.059




### (3) Package Type: TO252-2 (3)

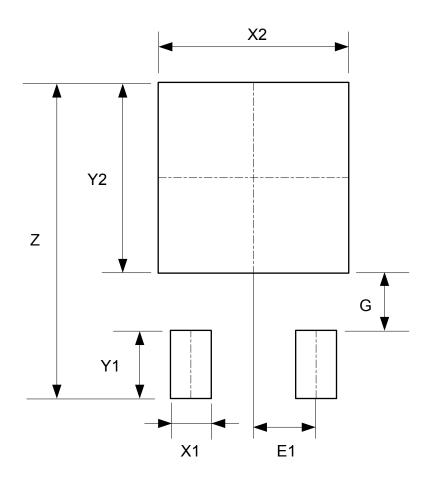

Dimensions	Z	X1	X2=Y2	Y1	G	E1
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	11.600/0.457	1.500/0.059	7.000/0.276	2.500/0.098	2.100/0.083	2.300/0.091




### (4) Package Type: TO252-2 (4)

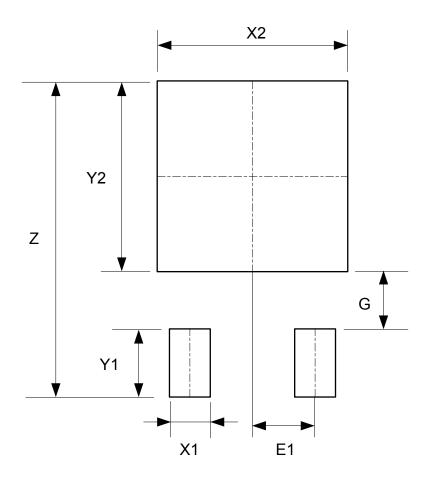

Dimonsions	Z	X1	X2=Y2	Y1	G	E1
Dimensions	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	11.600/0.457	1.500/0.059	7.000/0.276	2.500/0.098	2.100/0.083	2.300/0.091




### (5) Package Type: TO252-2 (5)

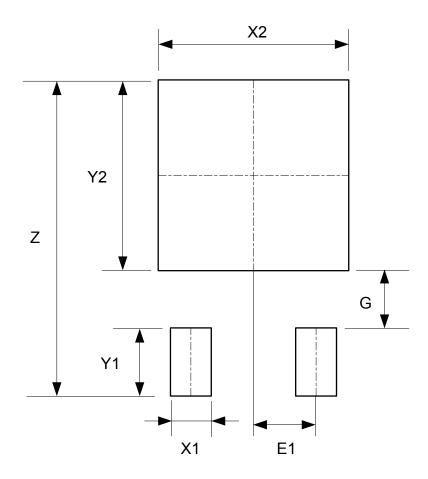

Dimensions	Z	X1	X2=Y2	Y1	G	E1
Dimensions	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	11.600/0.457	1.500/0.059	7.000/0.276	2.500/0.098	2.100/0.083	2.300/0.091



### (6) Package Type: TO263

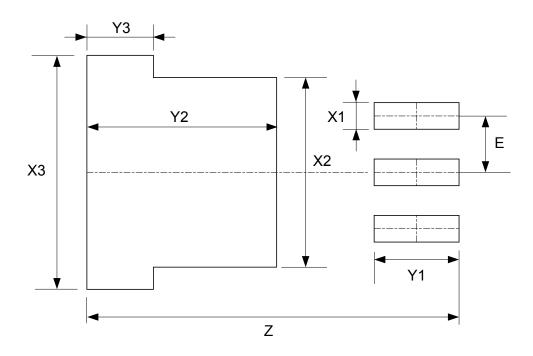

Dimensions	Z	X1	X2	X3
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	16.760/0.660	1.200/0.047	8.540/0.336	10.540/0.415
Dimensions	Y1	Y2	Y3	E
	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)	(mm)/(inch)
Value	3.830/0.151	8.560/0.337	3.000/0.118	2.540/0.100



#### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

#### LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2016, Diodes Incorporated

www.diodes.com

AZ1117 32 of 32 May 2016

Document number: DS36736 Rev. 4 - 2 **www.diodes.com** © Diodes Incorporated