


WTPeSTORE™

TWIN LOBE ROOTS BLOWER

Model AEW-42 • Air Cooled • AEW Make

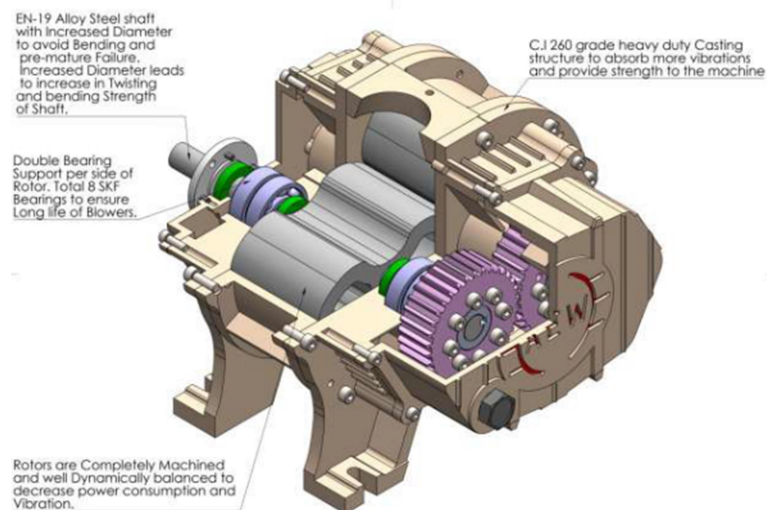


A rugged, efficient air-cooled twin lobe roots blower engineered for continuous industrial duty — supplied complete with frame, belt guard, suction silencer, air filter, discharge line assembly and drive pulleys.

KEY FEATURES

- ❑ Compact, air-cooled twin lobe design for reliable low-pressure air movement
- ❑ Rotor shaft assemblies dynamically balanced to ISO 1940 – Grade 6.3
- ❑ Performance tested as per BS 1571 Part-2 (1975) & ISO 1217 (1996)
- ❑ Hardened & ground spur timing gears (20MnCr5E) for long service life
- ❑ Anti-friction bearings with dedicated oil lubrication on both drive & non-drive side
- ❑ Supplied ready-to-install with standard accessories — no extra fabrication needed

TECHNICAL SPECIFICATION

Blower Model	AEW-42
Quantity	2 Nos.
Air Flow	70 m ³ /hr
Inlet Pressure	Atmospheric
Discharge / Differential Pressure	0.4 Kg/cm ²
Blower Speed	1125 rpm
Power at Shaft	2.17 bhp
Recommended Motor	3 HP
Inlet / Outlet Temperature	Ambient / 40°C above ambient
Inlet / Outlet Size	50 NB
Noise Level	72 dB ± 3 dB



WTPeSTORE™

Flow Orientation	Vertical
------------------	----------

MATERIAL OF CONSTRUCTION

Casing, Side Plates, Rotors, Covers & Pulley	CIFG-260, IS:210
Shaft	EN-19, BS:970
Spur Timing Gears	20MnCr5E (Teeth Hardened & Ground)
Bearings	Babbitt Metal (SKF)
Seals	Nitrile / Viton
Flanges	IS 2062, as per ANSI 16.5B standard
Frame	IS 2062, ISMC

GENERAL ARRANGEMENT DRAWING



ARRANGEMENT & OPERATING DETAILS

Bearings	Anti-friction
Lubrication	Oil for drive side & non-drive side
Direction of Flow	Top to Bottom
Direction of Rotation	Clockwise from drive end
Power Transmission	Through V-belt