
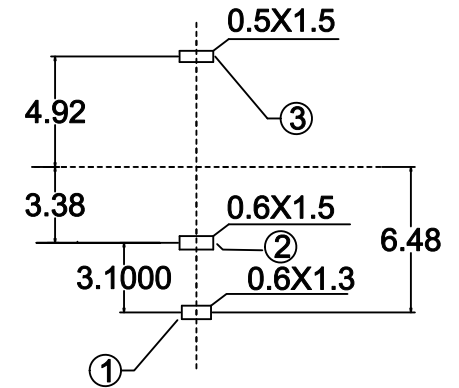



SCHEMATIC



PCB LAYOUT (TOP VIEW)

SPECIFICATION

1. Rating : DC 30V 0.5A;
2. Contact resistance: $\leq 0.03 \Omega$;
3. Insulation resistance: $\geq 100M \Omega$ (DC250V);
4. Withstand voltage: 500VAC ;
5. Insertion and extraction force: 3-25N;
6. life test: 5,000 cycles.

5	HOUSING	1	PBT				
4	BUSHING	1	BRASS	Ni-Plating			
3	SPRING CONTACT	1	BERYLLIUM COPPER	Ag-Plating			
2	TERMINAL	1	BRASS	Ag-Plating			
1	TERMINAL	1	BRASS	Ag-Plating			
NO.	DESCRIPTION	QTY	MATERIAL	PLATING			
UNIT:MM		MODEL NO: WQP-PJ301M-12		PAPER NO: A4		PAGE 1 OF 1	
 PHONE JACK				TOLERANCE	ANGLES	SCALE	VER
				±0.15	±1.5°	3:1	1
DESIGNER		QINGPU ELECTRONICS CO. , LTD					
BY: CHECK BY:							
APPROVED							
BY:							