



ABBREVIATIONS


AC.	ACOUSTIC	GA.	GAUGE	RAD.	RADIUS
ADJ.	ADJUSTABLE	GB.	GRAB BAR	RB.	ROLLER BLINDS
ALT.	ALTERNATE	GL.	GLASS	RCP.	REFLECTED CEILING PLAN
ALUM.	ALUMINUM	GLULAM	GLUE-LAMINATED	RD.	ROOF DRAIN
ANOD.	ANODIZED	GR.	GRADE	REINF.	REINFORCED
APPROX.	APPROXIMATE	GWB.	GYPSUM WALL BOARD	REQ'D.	REQUIRED
AVM	AIR/VAPOUR/MOISTURE	GWB.WR.	GYPSUM WALL BOARD - WATER RESISTANT	REV.	REVISION
BD.	BOARD	HCW	HOLLOW CORE WOOD	RTU	ROOF TOP UNIT
BLDG.	BUILDING	HDR.	HEADER	RM.	ROOM
BLK.	BLOCK	HD.WD.	HARD WOOD	RO	ROUGH OPENING
BLKG.	BLOCKING	HHS.	HAND HYGIENE SINK	RWDP.	RAIN WATER DOWN PIPE
BM.	BEAM	HM.	HOLLOW METAL	RWL.	RAIN WATER LEADER
BOT.	BOTTOM	HORIZ.	HORIZONTAL	SAP.	SUSPENDED ACOUSTIC PANEL
CB.	CATCH BASIN	HSS.	HOLLOW STRUCTURAL SECTION	SCW.	SOLID CORE WOOD
CG.	CORNER GUARD	HTR.	HEATER	SD.	SOAP DISPENSER
CIP.	CAST IN PLACE	HWT.	HOT WATER TANK	SAN.D.	SANITARY DISPOSAL
CJ.	CONTROL JOINT	ID.	INSIDE DIAMETER	SEC.G.	SECURITY GRILLE
CL.	CENTER LINE	IF.	INSIDE FACE	SECT.	SECTION
CL.G.	CEILING	INSUL.	INSULATION	SG.	SEMI-GLOSS
CMU.	CONCRETE MASONRY UNIT	INT.	INTERIOR	SHTG.	SHEATHING
COL.	COLUMN	JT.	JOINT	SS.	SIMILAR
COMP.	COMPACTED	LAV.	LAVATORY	SNW.G.	SNOW GUARD
CONC.	CONCRETE	LG.	LONG	SOG.	SLAB ON GRADE
CONT.	CONTINUOUS	M.STD.	METAL STUD	STC.	SOUND TRANSMISSION CLASS
CORR.	CORRIDOR	m.	METER	SPEC.	SPECIFICATION
COVER.	COVER	MAX.	MAXIMUM	SQ.	SQUARE
C/W.	COMPLETE WITH	MDF.	MEDIUM DENSITY FIBREBOARD	STD.	STANDARD
CS/CI	CONTRACTOR SUPPLY-CONTRACTOR INSTALL	MECH.	MECHANICAL	STRUCT.	STRUCTURAL
DEG.	DEGREE	MEZZ.	MEZZANINE	SUSP.	SUSPENDED
DF.	DRINKING FOUNTAIN	MH.	MANHOLE	SYM.	SYMMETRICAL
DIA.	DIAMETER	MIN.	MINIMUM	T&G.	TONGUE AND GROOVE
DIAG.	DIAGONAL	MISC.	MISCELLANEOUS	TBD.	TO BE DETERMINED
DN.	DOWN	mm	MILLIMETERS	TEMP.	TEMPERATURE
DRY.	DRYER (CLOTHES)	MO.	MASONRY OPENING	T/O	TOP OF
DS.	DOWNSPOUT	MR.	MOISTURE RESISTANT	TP.	TOILET/WASHROOM PARTITIONS
DWG(S).	DRAWINGS	MS.	MOP SINK	TPD.	TOILET PAPER DISPENSER
EA.	EACH	NIC	NOT IN CONTRACT	TRANS.	TRANSFORMER
EA.F.	EACH FACE	NO.	(#)NUMBER	TS.	TRACK SYSTEM
ELEC.	ELECTRICAL	NTS.	NOT TO SCALE	TV.	TELEVISION
ELEV.	ELEVATION	O/C.	ON CENTER	U/C.	UNDER COUNTER
EQ.	EQUAL	O.D.	OUTSIDE DIAMETER	U.N.O.	UNLESS NOTED OTHERWISE
ES.	EXPOSED STRUCTURE	O.S.F.	OUTSIDE FACE	U/S.	UNDERSIDE
EXIST.	EXISTING	OPP.	OPPOSITE	VB.	VAPOUR BARRIER
EXP.	EXPOSED	OSB.	ORIENTED STRAND BOARD	VERT.	VERTICAL
EXP.JT.	EXPANSION JOINT	OS/CI.	OWNER SUPPLY-OWNER INSTALL	VEST.	VESTIBULE
EXP.N.	EXPANSION	OS/CI.	OWNER SUPPLY-CONTRACOR INSTALL	VC.	VERNACARE
EXTR.	EXTERIOR	OS/VI.	OWNER SUPPLY-VENDOR INSTALL	VJ.	V JOINT
EXT.GR.	EXTERIOR GRADE	OWSJ.	OPEN WEB STELL JOIST	VOL.	VOLUME
FOC.	FACE OF CURB	PAT.	PATIENT	W/.	WITH
F.	FILM	PERIM.	PERIMETER	WC.	WATER CLOSET
FD.	FLOOR DRAIN	PG.	PLATE GLASS	WD.	WOOD
FDN.	FOUNDATION	PJ.	PARALAM JOIST	WF.	WALL FOUNTAIN
FE.	FIRE EXTINGUISHER	PLY.	PLYWOOD	WWM.	WELDED WIRE MESH
FEC.	FIRE EXTINGUISHER CABINET	P.LAM.	PLASTIC LAMINATE		
FHC.	FIRE HOSE CABINET	POLY.	POLYETHYLENE		
FIN.GD.	FINISHED GRADE	PP.	POWER POLE		
FLR.	FLOOR	PR.	PAIR		
FLP.	FIRE PLACE	PSC.	PARALAM STEEL CONNECTION		
FRP.	FIBER REINFORCED PLASTIC	PSF.	PRESSED STEEL FRAME		
FRS.	FIRE SHUTTER	PT.	PRESSURE TREATED		
FTG.	FOOTING	PTD.	PAPER TOWEL DISPENSER		
FURR.	FURRING	PROJ.	PROJECTION		
F/O.	FACE OF	PVC.	POLYVINYL CHLORIDE		
		PVCW.	POLYVINYL CHLORIDE WALLCOVERING		

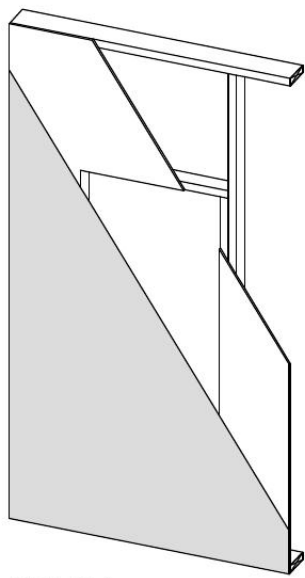


STEP 1
- WOOD FRAME WALL WITH OSB AND HOUSEWRAP

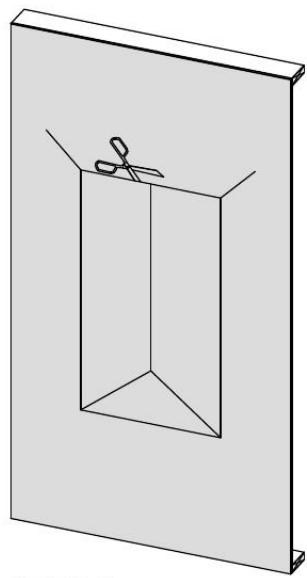


STEP 2
-MODIFY "1" CUT IN HOUSE WRAP

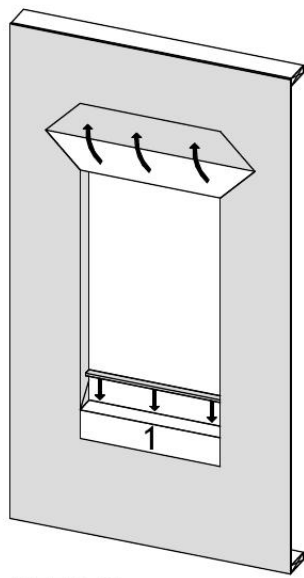


STEP 3
-INSTALL FIRST PIECE OF ADHESIVE-BACKED FLASHING
- HOUSEWRAP FOLDED IN;
ALTERNATELY,
TUCK HEAD FLAP UNDER
- INSTALL WOOD BACKDAM

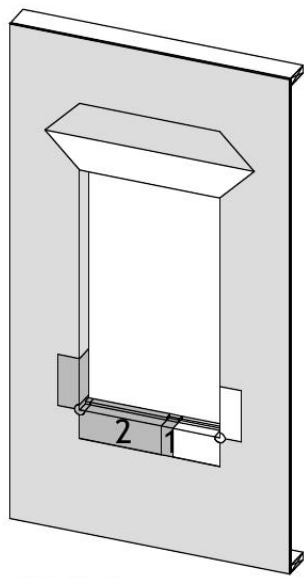


STEP 4
- INSTALL SECOND PIECE OF ADHESIVE-BACKED FLASHING
- INSTALL CORNER FLASHING PATCHES AT SILL

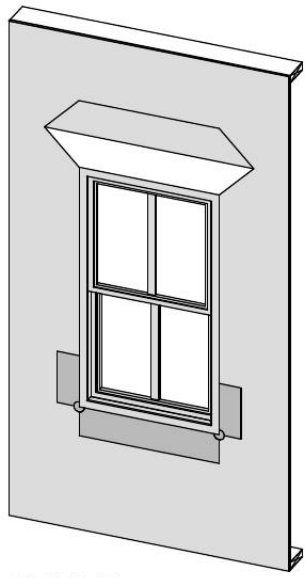


STEP 5
- INSTALL WINDOW PLUMB, LEVEL AND SQUARE PER MANUFACTURER'S INSTRUCTIONS

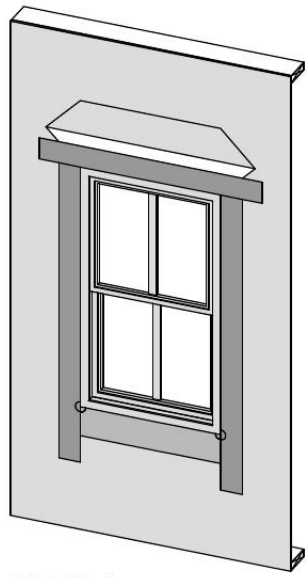


STEP 6
- INSTALL JAMB FLASHING FIRST THEN HEAD FLASHING

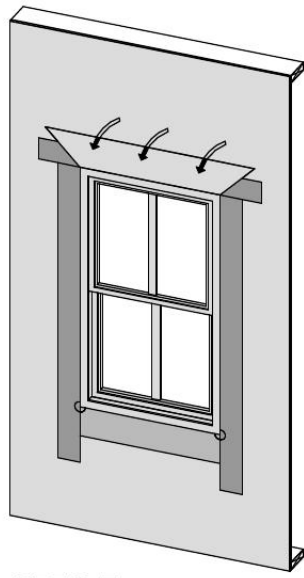


STEP 7
- FOLD DOWN HOUSEWRAP AT HEAD

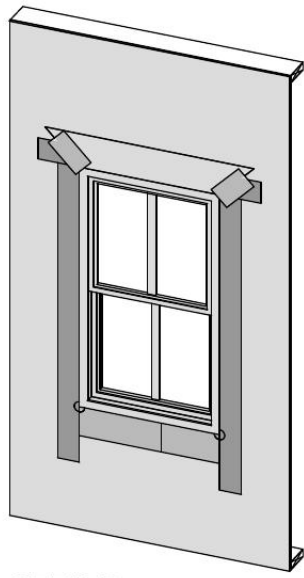


STEP 8
- APPLY CORNER PATCHES AT HEAD

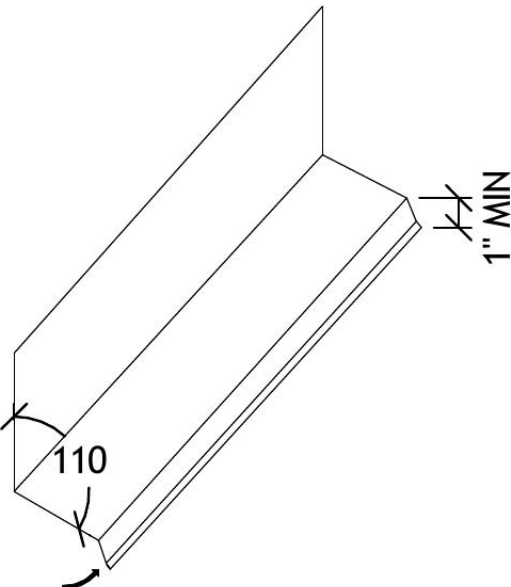


STEP 1
- FOLDED METAL FLASHING (MIN. 6% SLOPE)
- FOLD FRONT FACE OF FLASHING TO CREATE SAFETY EDGE

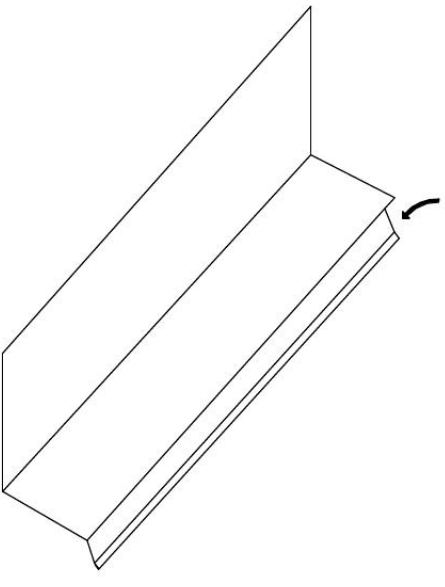


STEP 2
- NOTCH OUT FRONT FACE ONLY

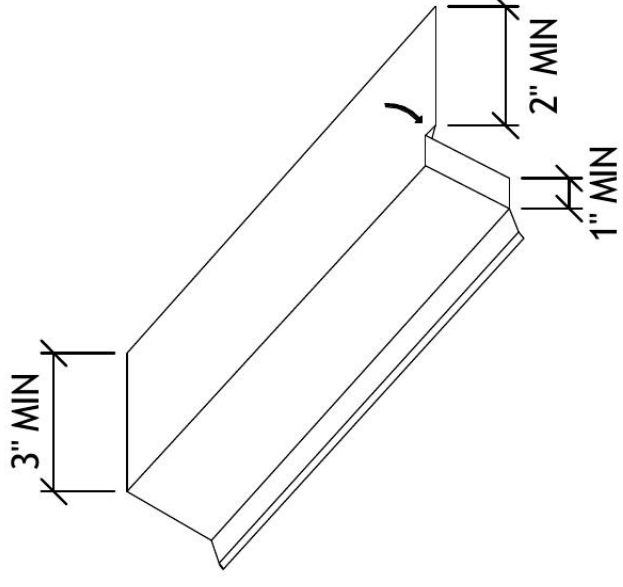

STEP 3
- FOLD UP EDGE
- DO NOT CRIMP BACK FOLD TIGHT SO POSITIVE SLOPE IS MAINTAINED

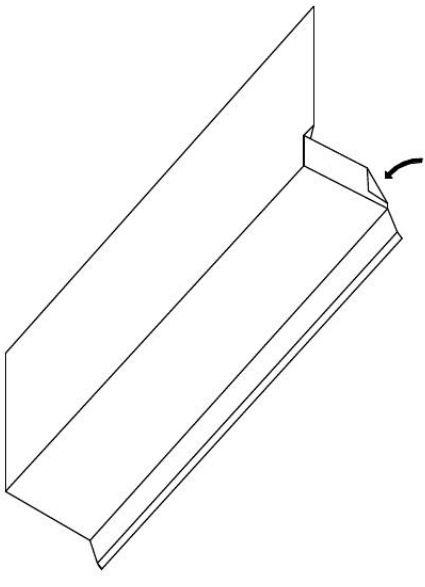

STEP 4
- FOLD OVER OUTER CORNER TO CREATE SAFETY EDGE
- END DAM MUST EXTEND TO FACE OF CLADDING



SYMBOL LEDGEND	
	BUILDING SECTION
	DETAIL
	GRID HEAD
	ROOM TAG
	KEYNOTE TAG
	DOOR TAG
	WALL TAG
	WINDOW TAG
	FLOOR TAG

Dimensions to Face of Foundation or Framing Stud UNO.

This plan and design is the property of WSA Engineering (2012) Ltd. and is solely for the use of the client with which WSA Engineering (2012) Ltd. has entered into agreement with, and cannot be used in whole or in part without the written consent of WSA Engineering (2012) Ltd.

DO NOT SCALE DRAWINGS
Written dimensions shall govern.

All dimensions to be verified on site by the contractor/builder. Report all errors or additions to the owner or designer prior to proceeding with the work



C	FEB 22/22	FOR BUILDING PERMIT
1	FEB 09/22	DETAILS ADDED, FLOOR PLAN UPDATES, SCHEDULES UPDATED AS PER DESIGN REVIEW MEETING
B	FEB 02/22	FOR DEVELOPMENT PERMIT
1	JAN 24/22	DETAILS ADDED, UNIT C ADJUSTED
A	JAN 21/22	ISSUED FOR COORDINATION
No.	Date	Issue/Revision

Professional Engineer Stamp:

F

T

E

C

E

A

E

E

E

BUILDING PERMIT
NOT FOR CONSTRUCTION