


1

2



3

4

UART Interface

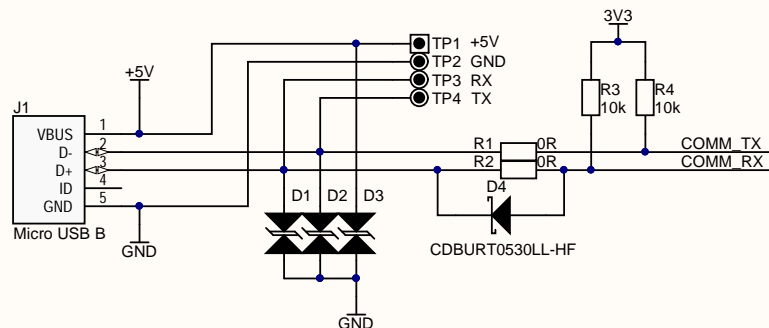

Alternative System Interface (NEW)

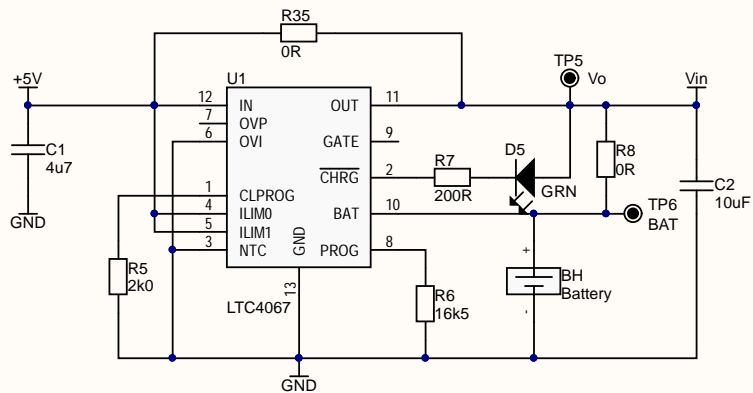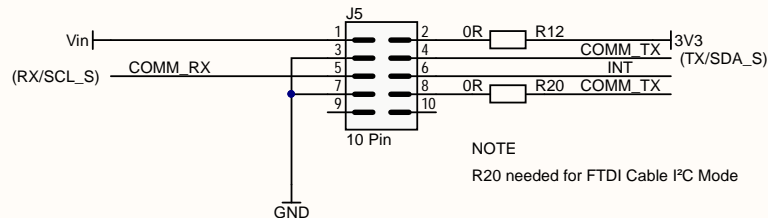


NOTE

R5 = 2K sets the input current limited to 500mA. $I_{lim} = 1000V/R5$

R6 = 16.5K sets the charging current to 61mA. $I_c = 1000V/R6$

Expect an LIR2450 Lithium-ion battery

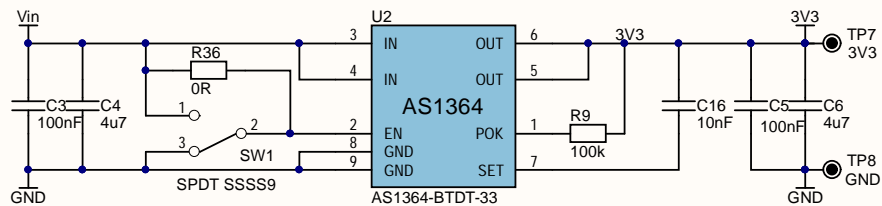

ams

Confidential © ams AG

Product: AS7265x

PCB Name: a0141b_CSS Moonlight AS7265x.PcbDoc

[No Variations]

Rev 2.0.0

Application Engineer: RGOE

Sheet Name: a0141b0_CSS Moonlight AS7265x_scm02.SchDoc

Release Date: 28/05/2018

Page Size: A4

Project: a014_CSS Moonlight

Last Save Date / Time: 5/31/2018 / 05:01:45 PM

Sheet 4 of 4

1

2

3

4