

**DETERMINATION OF FLAME CHARACTERISTICS IN  
A LOW SWIRL BURNER AT GAS TURBINE  
CONDITIONS THROUGH REACTION ZONE IMAGING**

A Dissertation  
Presented to  
The Academic Faculty

by

Karthik Periagaram

In Partial Fulfillment  
of the Requirements for the Degree  
Doctor of Philosophy in the  
Guggenheim School of Aerospace Engineering

Georgia Institute of Technology  
December 2012

# TABLE OF CONTENTS

<b>List of Figures</b>	<b>v</b>
<b>List of Tables</b>	<b>vi</b>
<b>List of Symbols</b>	<b>vii</b>
<b>Summary</b>	<b>viii</b>
<b>1 Introduction</b>	<b>1</b>
1.1 Motivation . . . . .	2
1.2 Literature Review . . . . .	6
1.2.1 Low Swirl Burner . . . . .	6
1.2.2 CH PLIF . . . . .	7
<b>2 Background</b>	<b>8</b>
2.1 LSB Flow Field . . . . .	8
2.2 LSB Flame Stabilization . . . . .	8
2.3 CH PLIF Physical Description . . . . .	8
2.4 CH PLIF Signal Modeling . . . . .	13
2.4.1 Basic Model . . . . .	13
2.4.1.1 Absorption Integral Calculation . . . . .	16
2.4.1.2 Population Distribution . . . . .	19
2.4.1.3 Solution . . . . .	20
2.4.2 Improved Model . . . . .	21
2.4.2.1 Solution . . . . .	24

<b>3</b>	<b>Experimental Methods and Considerations</b>	<b>26</b>
3.1	LSB Configurations . . . . .	26
3.1.1	Configuration A . . . . .	27
3.1.1.1	Test Facility . . . . .	27
3.1.1.2	Low Swirl Burner . . . . .	29
3.1.2	Configuration B . . . . .	30
3.1.2.1	Test Facility . . . . .	31
3.1.2.2	Low Swirl Burner . . . . .	33
3.2	Diagnostics . . . . .	35
3.2.1	Laser Doppler Velocimetry . . . . .	35
3.2.2	CH* Chemiluminescence . . . . .	38
3.2.2.1	Image Processing . . . . .	38
3.2.3	CH Planar Laser-Induced Fluorescence . . . . .	41
3.2.3.1	Imaging System . . . . .	43
3.2.3.2	Laminar Flame Setup . . . . .	43
3.2.3.3	Laser Wavelength Calibration . . . . .	43
<b>4</b>	<b>CH PLIF Signal Modeling and Validation</b>	<b>46</b>
4.1	CH PLIF Preliminary Experiments . . . . .	46
4.1.1	Excitation Scan . . . . .	46
4.1.2	Linearity Test . . . . .	49
4.2	Fluorescence Signal Modeling . . . . .	51
4.3	Results . . . . .	56
<b>5</b>	<b>LSB Flame Characteristics</b>	<b>57</b>
5.1	Effect of Reference Velocity . . . . .	57
5.2	Effect of Preheat Temperature . . . . .	59
5.3	Effect of Swirler Vane Angle . . . . .	61

5.4	Effect of Equivalence Ratio . . . . .	62
5.5	Effect of Combustor Pressure . . . . .	63
5.6	Flame Structure . . . . .	64
<b>6</b>	<b>Conclusions</b>	<b>65</b>
<b>A</b>	<b>Seeder Design</b>	<b>66</b>
	<b>References</b>	<b>70</b>

# LIST OF FIGURES

2.1	CH PLIF Spectrum . . . . .	12
2.2	CH energy level diagram . . . . .	21
2.3	Simplified CH energy level diagram . . . . .	22
3.1	Schematic of Test Facility A . . . . .	28
3.2	Detail schematic of Configuration A . . . . .	30
3.3	Schematic of Test Facility B . . . . .	32
3.4	Detail schematic of Configuration B . . . . .	34
3.5	Schematic of the LDV setup . . . . .	36
3.6	Sample CH* Chemiluminescence data . . . . .	39
3.7	Schematic of the Alexandrite laser . . . . .	41
3.8	Schematic of the laser calibration experiment . . . . .	44
3.9	Laser wavelength calibration chart . . . . .	45
4.1	Schematic of the excitation scan experiment . . . . .	47
A.1	Schematic of the old seeder design . . . . .	67
A.2	Schematic of the new seeder design . . . . .	68

## LIST OF TABLES

3.1	Swirler Dimensions . . . . .	27
4.1	Einstein A coefficients . . . . .	51
4.2	Quenching Cross-sections . . . . .	52
4.3	Einstein B coefficientsFIXME . . . . .	54
4.4	Spectroscopic constants . . . . .	56

## LIST OF SYMBOLS

$X_f$  Flame standoff distance

# SUMMARY



## CHAPTER 1

1

## INTRODUCTION

2

The need to reduce pollutant emissions, particularly the oxides of nitrogen,  $\text{NO}_x$ , is driven by increasing ecological awareness and stringent government regulations. This spurs efforts in the gas turbine industry to seek cleaner, more environment-friendly combustion concepts. Several mechanisms have been identified to explain the production of  $\text{NO}_x$  in hydrocarbon-air combustion systems. Of these, the thermal  $\text{NO}_x$  mechanism discovered by Zel'dovich, is a prominent source of  $\text{NO}_x$  production at the high temperature conditions encountered in typical combustors. The amount of thermal  $\text{NO}_x$  produced scales exponentially with the adiabatic flame temperature.

Efforts to reduce the flame temperature have led low  $\text{NO}_x$  gas turbines to adopt one of two options—Lean Premixed (LP) operation, or Rich-Quench-Lean (RQL) operation. Of these, RQL combustion suffers from sooting issues during the rich combustion step and the requirement of a second mixing event during the quenching step. Incomplete mixing can result in stoichiometric combustion in localized pockets within the combustor. LP combustion, on the other hand, is conceptually simpler and avoids the formation of such high temperature zones. Further, it entails operating at low equivalence ratios, reducing the temperature in the combustion zone. In practice, 1800 K is considered a limiting value for the flame temperature, ensuring that the thermal  $\text{NO}_x$  production is constrained to a minimum.

Operating a combustor at such lean conditions results in weaker combustion processes that are highly susceptible to perturbations and results in combustor instabilities or even flame blow off. This highlights the requirement for robust flame stabilization techniques that can sustain combustion at ultra-lean conditions. In their most basic form, flame stabilization techniques work by making the local reactant

velocity and the local flame speed equal. In the context of lean flames, the risk is of the slowly propagating flames to be blown off by the high velocity reactant stream. Consequently, flame stabilization in gas turbine combustion is brought about either by reducing the local reactant velocity (e.g. by using bluff body flame holders), by boosting the local flame velocity (e.g. by enhancing product recirculation), or by providing continual ignition to the flame (e.g. by using pilot flames).

Swirl-stabilized combustion is a widely used flame stabilization technique in gas turbines applications.[1,2] It primarily functions by inducing recirculation zones in the flow field that transport heat and radicals from the products into the reactants. This enhances the flame propagation velocity by increasing reaction rates within the flame, resulting in robust flame stabilization. However, the recirculation zones increase the peak residence times of the products and cause more thermal  $\text{NO}_x$  to be produced in the combustor. Nevertheless, swirl-stabilized combustors are ubiquitously employed today in land-based gas turbines used for power generation.

More recent research[3] on the Low Swirl Burner (LSB) has identified a potential solution for this problem. The LSB anchors a lifted flame, reducing the need for high swirl in the flow field. The lifted, V-shaped flame is stabilized by aerodynamic means which allows for robust operation even at low equivalence ratios. This weakens the recirculation zones and eliminates pockets of high residence times, resulting in significantly reduced  $\text{NO}_x$  emissions compared to a similar high-swirl design.

## 1.1 Motivation

By comparison to atmospheric pressure experiments, high pressure experimental testing of combustion systems is fraught with difficulties. This is reflected in the comparatively smaller subset of papers that report experimental results from high pressure tests. The primary source of these difficulties stems from the need for complicated testing facilities to reach and maintain high pressures. The inherently limited access

afforded by pressure vessels makes intrusive methods of data gathering nearly impos- 52  
sible. As a result, any need for spatially resolved data other than temperature and 53  
pressure measurements has to be met by optical diagnostics. 54

In the context of LSB research, these difficulties have confined much of the pub- 55  
lished experimental results to ambient conditions. The eventual application of this 56  
technology in gas turbine engines requires high quality data acquired at high pressure 57  
conditions. Ideally, such data will map the velocity field and heat release in the LSB 58  
and study their variation with flow conditions. Since the LSB relies on the velocity 59  
field to stabilize its flame, its flame characteristics hold information pertinent to both 60  
the velocity field and the heat release distribution within the combustor. This allows 61  
a passive diagnostic such as recording the flame chemiluminescence to be used even 62  
at high pressure conditions to observe and record usable data about the LSB flame 63  
characteristics. Such data, acquired at conditions closer to real world gas turbine 64  
combustor operating conditions is of particular interest to the gas turbine industry. 65

The primary flame characteristic of interest is the flame standoff distance, defined 66  
as the distance from the flame stabilization point to the inlet of the LSB. This met- 67  
ric is useful is gauging the stability of the flame and the need for control systems 68  
to closely monitor its tendency to flashback or blow-off. The standoff distance also 69  
relates to the heat load experienced by the injector and consequently affects how of- 70  
ten the mechanical components of the LSB will required to be replaced in operation. 71  
Finally, a systemic variation in the location of the flame over a range of flow parame- 72  
ters may indicate potential problems operating the combustor at previously untested 73  
conditions. 74

Quantifying the shape of the flame can complement the information gleaned from 75  
the flame standoff measurements. In case of the V-shaped LSB flame, this can be 76  
conveniently obtained by measuring the angle of the flame cone. Changes in the flame 77  
angle affect the length of the flame, which is a design consideration for sizing LSB 78

combustors in gas turbines.

The profile of the flame chemiluminescence along the length of the combustion zone is representative of the local heat release at those locations. A uniform heat release profile is preferred so as to avoid thermally stressing the combustor at the hot spots. Further, since  $\text{NO}_x$  production rates are so strongly dependent on temperature, the heat release profile can help forecast emissions performance issues of the combustor, particularly when augmented by knowledge of the local flow velocity (and hence, residence time). Finally, the heat release map could be incorporated into  $n$ - $\tau$  models to predict the onset of thermo-acoustic instabilities in the combustor.

The primary goal of this research work is to study the flame characteristics of the LSB, such as its location and shape, as a means to learn more about the combustor operation at high pressure conditions.

In case of lean hydrocarbon flames, the primary sources of flame chemiluminescence are  $\text{OH}^*$  ( $A^2\Sigma^+ \rightarrow X^2\Pi$  bands, 310 nm),  $\text{CH}^*$  ( $A^2\Delta \rightarrow X^2\Pi$  bands, 430 nm,  $B^2\Sigma^- \rightarrow X^2\Pi$  bands, 390 nm),  $\text{C}_2^*$  ( $d^3\Pi \rightarrow a^3\Pi$  Swan bands, 470 nm, 550 nm) and the  $\text{CO}_2^*$  (band continuum, 320–500 nm). Of these,  $\text{CH}^*$  chemiluminescence has several advantages that make it suitable for this particular study. First, collection of  $\text{CH}^*$  chemiluminescence is less affected by blackbody radiation from the walls of the combustor, compared to longer wavelength emissions from a species like  $\text{C}_2^*$ . Its narrow bandwidth allows one to use a bandpass filter to collect signals from only the wavelengths of interest, further minimizing interference from other light sources. Using such a narrow bandpass filter for a broad band emitter like  $\text{CO}_2^*$  would result in rejecting most of the available signal.  $\text{CH}^*$  chemiluminescence occurs in the visible wavelengths and does not require expensive UV lenses to acquire—as would be necessary to image  $\text{OH}^*$  chemiluminescence, for instance. In the LSB, where the flame is highly turbulent, the intensity of  $\text{CH}^*$  chemiluminescence cannot be reliably used as a measure of the absolute heat release.<sup>[4]</sup> However, the spatial distribution of the

CH\* chemiluminescence signal still serves as a heat release map of the combustor. 106  
For all these reasons, CH\* chemiluminescence is a suitable technique to image the 107  
LSB flame. 108

Ultimately, the amount of information that can be gathered by imaging the flame 109  
chemiluminescence is limited by its spatial resolution. Since chemiluminescence imag- 110  
ing is integrated over the line of sight, studying the flame brush or the flame structure 111  
is beyond its capabilities. A planar imaging technique such as Planar Laser-Induced 112  
Fluorescence (PLIF) is better suited for such applications. 113

In hydrocarbon flames, species accessible to PLIF are generally minor species in 114  
the flame. PLIF studies of hydrocarbon flames have hitherto focused on the OH 115  
radical. However, OH is produced in the flame zone and destroyed by relatively slow 116  
three-body reactions, causing it to persist and be transported away from the flame 117  
and into the product zone.[5] As a result, it does not serve as a direct marker of the 118  
flame front. Instead, the location of the flame is inferred from the sharp gradient in 119  
the OH signal as the reactants are converted into products. 120

The persistence of OH in the products makes OH PLIF somewhat less suited to 121  
studying flames in flows with high product recirculation. In such flows, the presence 122  
of OH in both the reactants and the products weakens the gradient at the flame. 123  
Further, since OH radicals could be transported transverse to the flame, its presence 124  
or absence serves as an unreliable indicator of local flame extinctions. Nevertheless, 125  
researchers have been able to use OH PLIF successfully[6, 7] to study such flames, 126  
particularly when the images are enhanced by nonlinear filtering techniques.[8, 9] 127

This study utilizes CH PLIF as the flame visualization technique. CH is pro- 128  
duced and destroyed rapidly by fast two-body reactions, confining it to the thin heat 129  
release zone of the flame. This has led to the widespread use of using CH as a marker 130  
species for the flame front.[10] CH is formed during the breakup of hydrocarbon fuel 131  
molecules[11] and is also known to play an important role in the production of prompt 132

NO<sub>x</sub>.<sup>[12]</sup> Hence, it is a minor species of considerable importance to combustion re-  
 search. This leads us to the second motivation for this study—to examine the use of  
 CH PLIF as a flame imaging technique in combustion systems and further, to use it  
 to image and study the LSB flame.

Recent studies<sup>[4]</sup> have indicated that the species HCO is a superior indicator of  
 heat release in hydrocarbon flames when compared to CH or OH. The HCO LIF  
 signal has been demonstrated to correlate well with the heat release rate, with little  
 dependence on equivalence ratio or strain rate. The last factor, in particular, has been  
 shown to quench the CH PLIF signal<sup>[13]</sup> in highly strained flames, even when the  
 flame itself is not extinguished. Unfortunately, the signal levels from HCO LIF are  
 very poor<sup>[4,14]</sup> and are unsuitable for single-shot investigation of hydrocarbon flames.  
 To overcome this, one study<sup>[14]</sup> proposed a simultaneous LIF investigation of CH<sub>2</sub>O  
 and OH with the reasoning that the formation rate of HCO is governed directly by the  
 product of the concentration of these two intermediates. This method has been used  
 in a number of investigations, despite being experimentally cumbersome. A more  
 recent implementation<sup>[15]</sup> has demonstrated single-shot HCO PLIF with moderate  
 signal-to-noise ratios by utilizing a novel excitation scheme. Follow up studies using  
 this technique are awaited.

## 1.2 Literature Review

### 1.2.1 Low Swirl Burner

The LSB is a relatively new combustion technology and as such has a brief history.  
 Initial interest in low swirl combustion was primarily motivated by its ability to sta-  
 bilize a freely propagating turbulent flame.<sup>[16]</sup> As a result, initial designs of the LSB  
 (which at the time used tangential jets to produce swirl) were pursued as test beds for  
 studying 1-D, planar turbulent flames.<sup>[3,17]</sup> Several subsequent studies<sup>[18–24]</sup> utilized

this behavior and investigated fundamental turbulent flame structure and propaga- 158  
tion in the jet LSB. Simultaneously, the discovery of its low  $\text{NO}_x$  emissions prompted 159  
interest in commercial applications of the LSB, such as in industrial furnaces and 160  
boilers.[25–27] 161

The current form of the LSB (as used in this thesis) using vanes to generate 162  
swirl was originally modified from a typical production swirl injector used in gas tur- 163  
bine combustors.[28] The  $\text{NO}_x$  emissions performance of this modified injector—now 164  
called the Low Swirl Injector (LSI)—was almost 50% lower than the older “High” 165  
Swirl Injector (HSI). Subsequent studies investigated the velocity field[29] and flame 166  
structure[30] of the LSB at atmospheric conditions and verified good emissions per- 167  
formance in a closed high pressure testing facility.[31] 168

More recent work has tended to focus on the use of various fuels such as hydrogen 169  
mixtures[32] with and without dilution[33], landfill gas[34, 35] and syngas[36]. 170

### 1.2.2 CH PLIF 171

Historically, CH was the first species to be detected using LIF in a flame.[37] 172

## CHAPTER 2

173

## BACKGROUND

174

### 2.1 LSB Flow Field

175

### 2.2 LSB Flame Stabilization

176

### 2.3 CH PLIF Physical Description

177

Laser-Induced Fluorescence, or LIF, is a two-step process. First, a marker species molecule (in this case, CH) in a lower energy state absorbs a photon and transitions to a higher energy state. The photon in question is provided by a monochromatic light source (typically a laser) at a specific energy (or frequency) chosen to match an allowed transition in the target species. This is followed by several physical processes, of which one pathway of interest leads to the spontaneous de-excitation of the excited molecule, accompanied by the release of a photon. The de-excitation may take the molecule back to the original ground state or to another energy state. The choice of the spectral and temporal properties of the excitation photon and the spontaneously emitted photon, together constitute the excitation scheme.

The excitation scheme chosen for this study follows the work done by Li et al.[\[38\]](#) who used a ring-cavity, pulsed alexandrite laser to provide excitation in the vicinity of the R-bandhead of the CH  $B^2\Sigma^- \leftarrow X^2\Pi$  (0,0) system. This bandhead is found at about 387.2 nm and represents transitions from a ground state rotational quantum number of  $N'' = 7$ . Alexandrite lasers have relatively large bandwidths (a few  $\text{cm}^{-1}$  is not uncommon) and hence make it possible to excite several of the neighboring transitions near the bandhead. From simulations described later in this work, it is found that CH molecules in the ground state  $X^2\Pi$ ,  $v'' = 0$  with rotational quantum



numbers  $N''$  between 5–9 account for virtually all the absorption that takes place. 196

Upon excitation, these molecules transition to the second electronically excited 197  
 $B^2\Sigma^-$  state and populate the lowest vibrational level, ( $v' = 0$ ). Since these transitions 198  
occur in the R-branch, the rotational quantum number increases by +1, resulting in 199  
the population of the  $N'$  levels between 6–10. At this point, the following possibilities 200  
exist for the excited molecule: 201

1. The molecule can undergo inelastic collisions with other molecules, resulting in 202  
relaxation in the rotational, vibrational or electronic manifolds. 203
2. The molecule can spontaneously emit a photon and return to any of the lower 204  
energy states. 205
3. The molecule can experience stimulated emission in the presence of another 206  
photon of the appropriate frequency and return to any of the lower energy 207  
states. 208
4. The molecule can experience further excitation either by absorbing a photon or 209  
through collisional means and can react chemically. 210

Now, let us examine these potential pathways in greater detail. The first pathway 211  
pertains to relaxation. The excitation and subsequent population of a higher energy 212  
state causes the CH population distribution to deviate from the equilibrium Boltz- 213  
mann distribution. The degree of relaxation possible is limited by the lifetime of the 214  
energy level the excited species occupy. The collision-free, radiative lifetime of the  $B$  215  
electronic state is about 300 ns[39]—long enough for sufficient rotational relaxation to 216  
occur, but too short for vibrational relaxation. As a result, we may suppose that the 217  
vibrational manifold remains relatively unaffected, while the rotational manifold is 218  
relaxed closer to an equilibrium distribution. The question of the electronic relaxation 219  
will be addressed later in this discussion. 220

The second option available for the excited CH molecule is to spontaneously emit a photon and return to a lower energy state. The CH system is very strongly diagonal, meaning that transitions preserving the vibrational quantum number are more probable than others. This means the majority of this spontaneous emission will result from  $B^2\Sigma^- \rightarrow X^2\Pi(0,0)$  and  $B^2\Sigma^- \rightarrow A^2\Delta(0,0)$  de-excitations. The  $B \rightarrow X$  transition will be nearly resonant with the excitation wavelength, making it hard to observe, while the  $B \rightarrow A$  transition is only a few hundred wavenumbers apart, putting the emission in far IR. The rate of spontaneous emission between two states is given by the Einstein emission coefficient for the transition.

The third option is for the CH molecule to experience stimulated emission in the presence of a photon of an appropriate frequency. It is highly unlikely that the apposite photon would have a frequency other than the excitation laser. The rate of stimulated emission induced by the excitation laser beam is proportional to the Einstein absorption coefficient for the transition. Other photons that can induce stimulated emission in the CH molecules could originate from spontaneous emission or CH\* chemiluminescence. As mentioned earlier, it is highly unlikely that these will result in stimulated emission of any significant proportion. In part, this is due to the spatial distribution of CH in a typical flame. In Chapter 1, it was stated that CH molecules are expected to be found only in the thin reaction zone of the flame. This causes most photons to be emitted in directions away from the flame, reducing their chance of encountering more CH molecules. Since CH is a minor species, its concentrations are inherently too low, further reducing the likelihood of this pathway.

The fourth option is for the molecule to experience further excitation from absorbing another photon or through collisions with other energetic molecules. The  $B^2\Sigma^-$  state is very shallow, possessing only two vibrational levels before the molecule will dissociate. Since most available photons do not match any transitions from the  $B^2\Sigma^-$ ,  $v = 0$  state, it is unlikely to photo-dissociate. However, dissociation could

still be brought about by collisions with other molecules. Thus, the excited state CH molecules are less stable than the ground state CH molecules and such predissociation can lead to laser-induced chemical reactions.

Having listed all the options, let us resume the discussion on the possibility of electronic energy transfer from the excited  $B^2\Sigma^-$ ,  $v' = 0$  state. The spacing of the energy levels in the CH system is such that the  $B^2\Sigma^-$ ,  $v' = 0$  state is found to be near-degenerate with the  $A^2\Delta$ ,  $v = 1$  energy level. Consequently, the  $B^2\Sigma^- \leftrightarrow A^2\Delta$  (0,1) transition is reversible. Further, recall that CH is a strongly diagonal system with high transition probabilities for transitions involving no change to the vibrational quantum number. This means that the  $B^2\Sigma^- \leftrightarrow A^2\Delta$  (0,0) transition will be quite strong as well. Experiments performed by Garland et al.[\[40\]](#) measured that the  $B^2\Sigma^- \rightarrow A^2\Delta$  electronic energy transfers account for almost a quarter of all collisional depletion of the  $B^2\Sigma^-$ ,  $v = 0$  level.

Theoretical calculations using overlap integrals between the involved energy levels predict that a majority of these transfers will be along the diagonal (0,0) transition.[\[41\]](#). Instead, experimental data indicates that the number is closer to a fifth, with almost 80% of the transfers following the near-degenerate (0,1) pathway. It is this electronic energy transfer mechanism that enables our excitation scheme to record high quality CH PLIF images. Having now populated the  $A^2\Delta$  states, the resulting spontaneous emission from the  $A^2\Delta \rightarrow X^2\Pi$  (0,0) and (1,1) transitions can be easily observed between 420–440 nm. A small portion of the fluorescence in this wavelength range also occurs from the  $B^2\Sigma^- \rightarrow X^2\Pi$ , (0,1) transition. Since these emission wavelengths are at least 30 nm away from the excitation wavelength, a simple glass filter is sufficient to suppress any elastic scattering from the laser beam.

The relevant simulated and measured spectra are shown in [Figure 2.1](#). The simulated spectra are from LIFBASE for a 1 atm, thermalized CH system at 1800 K. Experimental data is acquired from a laminar flame (see [Section 3.2.3.2](#)) excited by

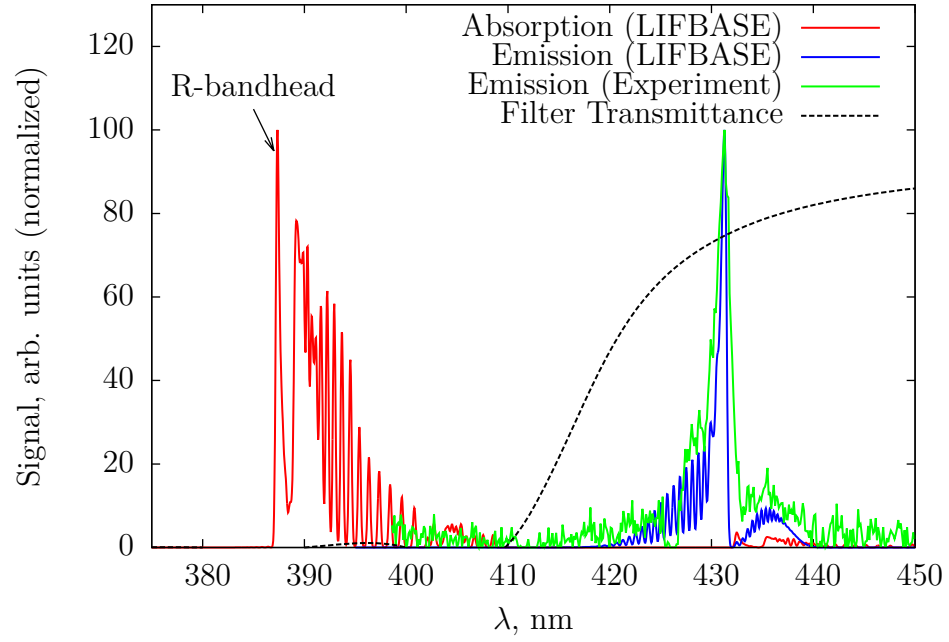


Figure 2.1: The spectrum above shows simulated, normalized spectra for the  $B^2\Sigma^- \leftarrow X^2\Pi$  absorption bands (*red*) and the  $A^2\Delta \rightarrow X^2\Pi$  excited fluorescence emission bands (*blue*) from LIFBASE. Also plotted is the experimentally measured emission spectrum (*green*). The dashed black curve is the transmittance of a 3 mm thick, GG 420 Schott glass filter used to block elastic scattering in imaging experiments.

an alexandrite laser beam (see Section 3.2.3) and collected using a fiber optic cable. The fiber optic cable was aligned with the 100  $\mu\text{m}$  wide slit of a 0.3 m, f/4 SpectraPro 300i spectrometer and the collected light is diffracted using a 600 lines/mm grating. The resulting spectrum was accumulated by a PI-MAX 512 intensified camera (see Section 3.2.3.1) over 1000 gates of 300 ns each. The resolution of the LIFBASE simulation is set to match that of the spectrometer (about 0.3 nm).

## 2.4 CH PLIF Signal Modeling

We now focus on developing a mathematical model to predict the signal levels obtained from CH PLIF. The intent and scope of this discussion is to be able to predict, in a semi-quantitative manner, the variation of the CH PLIF signal as a function of the thermodynamic state variables and the local composition in the reaction zone of a flame. It is not meant to be an accurate calculation of the number of LIF photons produced in a given experiment. This prediction will allow us to compare the PLIF signal intensity across various initial pressures, temperatures and reactant mixtures. The results will enable us to judge the feasibility of using CH PLIF as a diagnostic technique to image the flame front with high fidelity for the initial conditions and reactant mixtures in question.

### 2.4.1 Basic Model

In its most basic form, the number of fluorescence photons generated in a system,  $\Phi$  is the product of the number of emitters,  $N$  and the Einstein coefficient for spontaneous emission,  $A$ .

$$\Phi = N \times A \quad (2.1)$$

The fluorescence photons produced are radiated in all directions and only a frac-

tion of these can be recorded by a collection system in an experiment. This fraction  
is determined by the experimental set up, the collection angle, and the efficiency of  
the optics and the detector used to record the signal. For this analysis, however, this  
fraction is omitted to reduce complexity.

The predicted signal intensity represents the total number of photons emitted in  
all directions. In reality, only a fraction of these emitted photons will be recorded  
by the collection system. This fraction is a function of the experimental setup and  
depends on the collection angle, the efficiency of the optics and the detector used to  
record the signal. This fraction is left out because our objective is only to predict the  
relative variation in the signal between various premixed flames.

In a simple two-level model for the fluorescing system (with the two levels labeled 0  
and 1), Equation 2.1 may be expanded in terms of the number density of the emitters,  
 $n$  and the volume in which the fluorescence occurs,  $V$ .

$$\Phi = n_1 V A_{10} \quad (2.2)$$

The population of the upper state,  $n_1$  can be solved for by rate analysis. The  
mathematical treatment is not particularly complicated and is covered in detail by  
various textbooks and review papers.<sup>[42]</sup> Here, we shall merely remark that the func-  
tional form of the solution has two limiting cases. The limits are decided by the  
relative magnitudes of the pumping rate,  $W_{01}$ , and the relaxation rate given by the  
sum of the spontaneous emission rate and the collisional quenching rate,  $A_{10} + Q_{10}$ .  
The former is the rate at which the upper energy level is populated through absorp-  
tion. The latter represents the rate at which the molecules return to the lower energy  
state, either through spontaneous emission or by losing energy to other molecules  
through inelastic collisions.

When the pumping rate is far lower compared to the relaxation processes ( $W_{01} \ll$   
 $A_{10} + Q_{10}$ ), the solution tends to the weak excitation limit. In this limit, the functional

form of the solution is shown in Equation 2.3

322

$$\Phi = n_0 V W_{01} \frac{\overbrace{A_{10}}^{\text{Fluorescence Yield}}}{A_{10} + Q_{10}} \quad (2.3)$$

The  $n_0 V W_{01}$  term in Equation 2.3 represents the number of molecules that are  
excited to the upper state per second, while the fluorescence yield represents the  
fraction of these molecules that will produce a LIF signal. In typical combustion  
environments, the fluorescence yield is usually small, since the collisional quenching  
rate dominates the spontaneous emission rate. The rate of collisional quenching of  
the marker species, in this case CH, by another species in the flame is proportional  
to the frequency of collisions between the two species. Further, the effectiveness of  
such collisions is decided by a collision cross-section,  $\sigma$ , which is often a function of  
the temperature. Equation 2.4 presents the calculation of the collisional quenching  
rate by summation over all the species,  $i$ , in the flame.

323

324

325

326

327

328

329

330

331

332

$$\begin{aligned} Q_{10} &= \sum_i n_i \times \sigma_i \times c_i \\ &= \sum_i n_i \sigma_i \sqrt{\frac{8kT}{\pi \mu_i}} \\ &= \sqrt{\frac{8kT}{\pi}} \sum_i \frac{n_i \sigma_i}{\sqrt{\mu_i}} \end{aligned} \quad (2.4)$$

In Equation 2.4,  $k$  is the Boltzmann constant,  $T$  is the local temperature,  $n_i$  is  
the number density of species  $i$  and  $\mu_i$  represents the reduced mass of the colliding  
CH- $i$  molecules, given by Equation 2.5.

333

334

335

$$\mu_i = \frac{m_i m_{CH}}{m_i + m_{CH}} \quad (2.5)$$

By probability, virtually all the collisions of the CH molecule will occur with the

336

major species. As a result, the summation in Equation 2.4 need only be carried out  
over the major species in the flame. The values of the local number densities of  
the major species can be measured by techniques like Raman scattering, or can be  
obtained from solving chemical kinetics models.

#### 2.4.1.1 Absorption Integral Calculation

Let us now examine the first term in Equation 2.3 in further detail. Let  $\phi(\nu)$  represent  
the normalized lineshape of the absorption line being excited, such that  $\int \phi(\nu) d\nu = 1$ .  
If  $B_{01}$  is the Einstein coefficient for absorption for the line being excited, the term  
 $B_{01}\phi(\nu)$  represents the spectral absorptivity of the line at  $\nu$ .  $B_{01}$  is usually presented  
in  $\text{m}^2/\text{Js}$  for LIF applications. Similarly, let  $I_\nu$  be the spectral intensity of the incident  
radiation, which is the intensity (power per area) of the laser beam per spectral  
interval. Let  $\psi(\nu)$  be the normalized spectral profile of the laser lineshape, such that  
 $I_\nu = I\psi(\nu)$  and  $\int \psi(\nu) d\nu = 1$ .  $I_\nu$  is usually given in  $\text{W}/\text{cm}^2/\text{cm}^{-1}$  for ease of use in  
laser applications.

The product of the spectral absorptivity and the spectral intensity integrated over  
the spectrum, gives the pumping rate,  $W_{01}$ , as shown in Equation 2.6. The factor  $c$   
is the speed of light, which brings the units of  $W_{01}$  to  $\text{s}^{-1}$ .

$$W_{01} = \frac{I}{c} \int \psi(\nu) B_{01} \phi(\nu) d\nu \quad (2.6)$$

Since our excitation scheme targets multiple lines in the R-bandhead, we actually  
have a summation of several absorption lines in this integral.

$$\begin{aligned} W_{01} &= \frac{I}{c} \int \psi(\nu) \sum_j B_j \phi_j(\nu) d\nu \\ &= \frac{I}{c} \sum_j B_j \int \psi(\nu) \phi_j(\nu) d\nu \end{aligned} \quad (2.7)$$



In Equation 2.7, the terms  $B_j$  are the absorption coefficients,  $B_{01}$ , for each transition being excited. Consider now, each term in the above integral. The laser lineshape function,  $\psi(\nu)$ , can be modeled as a Gaussian profile without any loss of generality. The linewidth of the alexandrite laser, when operated in broadband mode, is of the order of a few wavenumbers. The effect of line broadening mechanisms, such as natural broadening, inhomogeneous broadening, etc that are commonly encountered in solid state lasers are negligible in comparison and hence, do not affect the lineshape appreciably.

$$\psi(\nu) = \frac{1}{\sigma_l \sqrt{2\pi}} \exp\left(-\frac{(\nu - \nu_l)^2}{2\sigma_l^2}\right) \quad (2.8)$$

The mean of the lineshape profile,  $\nu_l$ , is set by tuning the center wavelength of the laser. The Full Width at Half Max (FWHM) of the laser,  $\Delta\nu_l$ , is prescribed by the manufacturer and can be used to calculate the standard deviation of the Gaussian as follows.

$$\sigma_l = \frac{\Delta\nu_l}{2\sqrt{2\ln 2}} \quad (2.9)$$

The lineshape of the absorption line being excited, on the other hand, is primarily dictated by mechanisms associated with gas-phase media—collisional broadening and Doppler broadening being the most important ones. Collisional broadening is a homogeneous mechanism and produces a Lorentzian broadened lineshape. The FWHM of the Lorentzian profile is related to the thermodynamic conditions by the following empirical formula.

$$\Delta\nu_c = 0.1 \left(\frac{p}{p_0}\right) \left(\frac{T_0}{T}\right)^{0.6} \quad (2.10)$$

In Equation 2.10,  $p_0$  and  $T_0$  represent standard conditions of pressure and temperature (101325 Pa and 300 K) respectively. By contrast, Doppler broadening is an

inhomogenous mechanism that results in a Gaussian lineshape. Its effect depends on  
the frequency (wavenumber) of the line being broadened,  $\nu_a$ , and on the molecule's  
velocity. The FWHM of the resulting broadened lineshape is given by,

$$\Delta\nu_d = \nu_a \frac{\sqrt{\ln 2}}{c} \sqrt{\frac{8kT}{m_{CH}}} \quad (2.11)$$

The combined effect of these two broadening mechanisms can be calculated by  
convoluting the two broadened lineshapes. In this case, a Lorentzian convoluted  
with a Gaussian results in a Voigt profile. In order to simplify the calculations, we  
assume that the collision-broadened Lorentzian profile is reasonably approximated by  
a Gaussian profile with the same FWHM. Now, the convolution of the two profiles  
results in another Gaussian, with the same mean and a FWHM given by,

$$\Delta\nu_a = \sqrt{\Delta\nu_c^2 + \Delta\nu_d^2} \quad (2.12)$$

Thus, the Gaussian lineshape of the broadened absorption line can be written as,

$$\phi(\nu) = \frac{1}{\sigma_a \sqrt{2\pi}} \exp\left(-\frac{(\nu - \nu_a)^2}{2\sigma_a^2}\right) \quad (2.13)$$

In Equation 2.13,  $\nu_a$  is the frequency (wavenumber) of the absorption peak being  
excited. The standard deviation of the lineshape,  $\sigma_a$ , is related to the broadened  
FWHM,  $\Delta\nu_a$ , by the following equation.

$$\sigma_a = \frac{\Delta\nu_a}{2\sqrt{2\ln 2}} \quad (2.14)$$

With the above information, the integral in Equation 2.7 can be solved analytically  
as follows.

$$\int \psi(\nu)\phi(\nu)d\nu = \frac{1}{\sqrt{2\pi(\sigma_a^2 + \sigma_l^2)}} \exp\left(-\frac{(\nu_l - \nu_a)^2}{2(\sigma_a^2 + \sigma_l^2)}\right) \quad (2.15)$$

#### 2.4.1.2 Population Distribution

Once again, consider Equation 2.3, this time focusing on the term  $n_0$ , the number density of the marker species (CH, in this case) in the lower energy state that are available for excitation to the upper state. This comprises only a small subset of all the available CH molecules in the flame.

$$n_0 = n_{CH} f_j \quad (2.16)$$

The fraction,  $f_j$ , of CH molecules that populate the energy level  $j$  can be calculated from the Boltzmann distribution. Equation 2.17 presents the expression for  $f_j$  in terms of the vibrational and rotational quantum numbers,  $(v, J)$ , of the energy level  $j$ .

$$f_j(v, J) = \frac{\exp\left(\frac{-hcE_v(v)}{kT}\right)(2J+1)\exp\left(\frac{-hcE_r(v, J)}{kT}\right)}{Q_{rv}} \quad (2.17)$$

The vibrational energy,  $E_v(v)$  of a level is calculated according to Equation 2.18, while the rotational energy,  $E_r(v, J)$  is calculated according to Equation 2.19.

$$E_v(v) = \omega_e \left(v + \frac{1}{2}\right) - \omega_e x_e \left(v + \frac{1}{2}\right)^2 + \omega_e y_e \left(v + \frac{1}{2}\right)^3 - \omega_e z_e \left(v + \frac{1}{2}\right)^4 \quad (2.18)$$

$$E_r(v, J) = \left\{B_e - \alpha_e \left(v + \frac{1}{2}\right)\right\} J(J+1) - \left\{D_e + \beta_e \left(v + \frac{1}{2}\right)\right\} J^2(J+1)^2 \quad (2.19)$$

The spectroscopic constants in Equations 2.18 and 2.19 can be found in literature[43].

The rovibrational partition function,  $Q_{rv}$  is a summation over all available vibrational and rotational levels in the particular electronic state. For the ground state of the CH molecule, there are five available vibrational quantum numbers,  $v = 0$  to

$v = 4$ . The  $B^2\Sigma^- \leftarrow X^2\Pi$  transition of the CH system is governed by Hund's Case b 407  
and hence, the appropriate rotational quantum number to use is  $N$ . Each vibrational 408  
level has twenty-two possible values for  $N$  from  $N = 1$  to  $N = 22$ . For each rotational 409  
quantum number  $N$ , there are two possible values of  $J$  given by  $N \pm \frac{1}{2}$ . 410

#### 2.4.1.3 Solution 411

Substituting Equations 2.7 and 2.16 into 2.3, and noting that the signal produced is 412  
actually integrated over a volume, 413

$$\Phi = \int_V \frac{n_{CH}A_{10}}{A_{10} + Q_{10}} \frac{I}{c} \sum_j f_j B_j \int_\nu \psi(\nu) \phi_j(\nu) d\nu dV \quad (2.20)$$

In Equation 2.20, the absorption integral from Equation 2.15 is highlighted in red. 414  
The outer integral is performed in space, over the portion of the flame illuminated by 415  
the laser sheet. It is possible to rewrite the outer integral as a 1-D integral over the 416  
thickness of the flame by replacing the laser intensity,  $I$  with the laser power,  $P$ . 417

$$\Phi = \frac{P}{c} \int_x \frac{n_{CH}A_{10}}{A_{10} + Q_{10}} \sum_j f_j B_j \int_\nu \psi(\nu) \phi_j(\nu) d\nu dx \quad (2.21)$$

Equation 2.21 is thus, the solution to the two-level model in the weak excitation 418  
limit. Note that the LIF signal varies linearly as the incident laser power (or intensity). 419  
Consequently, the weak excitation limit is also referred to as the linear regime. 420

For the sake of completion, the other limit of the two-level model solution occurs 421  
when the rate of pumping far exceeds the relaxation rate ( $W_{01} \gg A_{10} + Q_{10}$ ). This 422  
is called the saturated limit and in this limit, the fluorescence signal ceases to change 423  
with the intensity of the incident laser beam. Operating in this regime is generally 424  
not preferred due to several reasons. First, the magnitude of the LIF signal per 425  
unit incident laser intensity tends to be the maximum in the linear regime. Once 426  
the variation ceases to be linear (even before nearing the saturation limit), we get 427

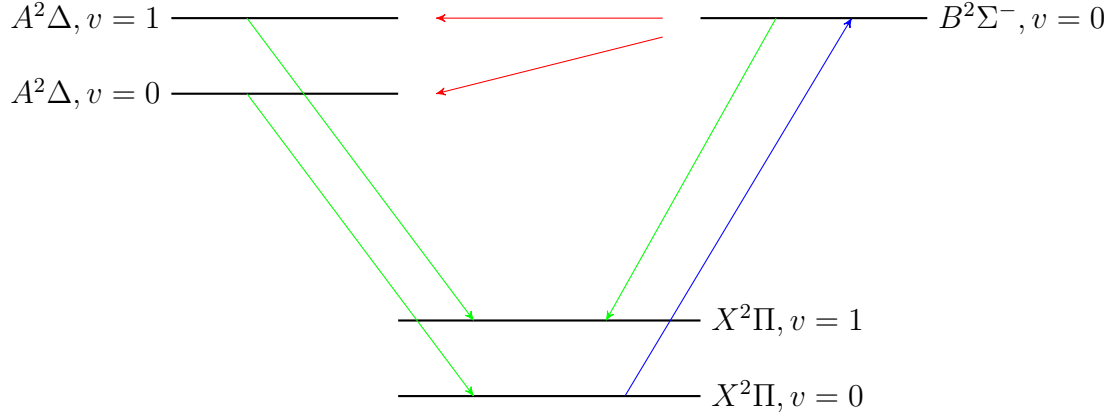


Figure 2.2: Some of the important transitions between energy levels in a CH molecule are shown. The excitation of the CH molecules (blue) is followed by collisional energy transfer processes (red) which populate additional energy levels. Spontaneous emission from some of these energy levels (green) is collected.

diminishing returns for increasing the laser power. Further, the saturation criterion (maintaining a high laser intensity) is difficult to satisfy simultaneously in the spatial, temporal and spectral domains. For these reasons, we will restrict our discussion hence forward the linear regime only.

#### 2.4.2 Improved Model

While the two-level model is conceptually simple, applying it to describe complicated systems, such as the CH molecule, results in large errors.[42] Hence, it is worthwhile to investigate a more complicated model that can describe the CH system with higher fidelity.

Figure 2.2 shows the pathways described in Section 2.3. An accurate model of the CH system should involve at least five energy levels, namely the  $B^2\Sigma^-, v=0$ ,  $A^2\Delta, v=0,1$ , and  $X^2\Pi, v=0,1$  levels. The model will need to account for collisional transfers between each of these levels, in addition to spontaneous and stimulated transitions. The mathematical solution quickly becomes tedious and complicated. Further, it involves several rate coefficients that have not yet been measured experimentally.

Fortunately, this can be significantly simplified. Previous studies[39, 41] have

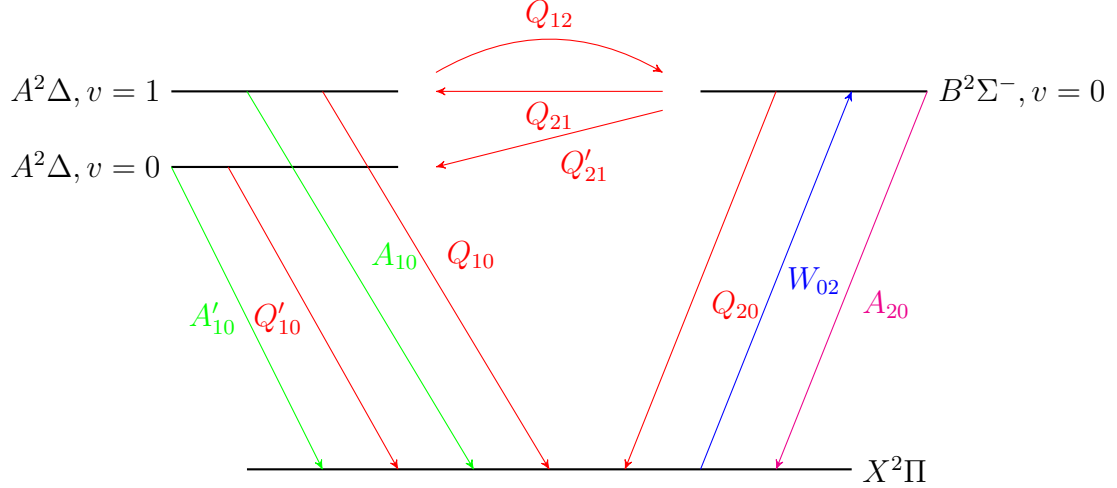


Figure 2.3: A simplified model of the transitions between the energy levels in a CH system. Excitation (blue) of ground state CH molecules to the upper electronic state is followed by several collisional energy transfer processes (red). A small portion of these molecules spontaneously emit a photon (green) and return to ground state. The spontaneous emission corresponding to resonant PLIF (magenta) is not collected.

indicated that the off-diagonal  $B \rightarrow X$  (0,1) transition plays a relatively minor role 444  
accounting for only 3.5% of the total fluorescence. Further, the  $A \rightarrow X$  transitions are 445  
known[44] to be strongly diagonal, with little or no interaction[40] between the two 446  
states. The net result of these two assertions is that we can treat the two  $B \rightarrow A \rightarrow X$  447  
pathways to be disjoint and parallel. The resulting pseudo-three-level model is shown 448  
in Figure 2.3. 449

The rates of the various transition processes are indicated in Figure 2.3.  $W_{02}$  is 450  
the pumping process that populates the  $B(0)$  state.  $Q_{ij}$  are collisional energy transfer 451  
processes that transfer CH molecules from the  $i$  level to the  $j$  level. The subscripts 0, 1 452  
and 2 represent the electronic energy levels  $X$ ,  $A$  and  $B$ . Processes involving the  $A(0)$  453  
state are differentiated from those involving the  $A(1)$  state by a prime ('). Finally, 454  
 $A_{ij}$  represents the spontaneous emission coefficients between the  $i$  and  $j$  levels. 455

Applying Equation 2.1 to this case, we can write an expression for the LIF signal 456

intensity as follows,

457

$$\Phi = (n_1 A_{10} + n'_1 A'_{10})V \quad (2.22)$$

Our task is to solve for the values of  $n_1$  and  $n'_1$  in terms of  $n_0$ . To do this we need  
to write rate equations describing the variation of the populations of the three upper  
states with time.

458

459

460

$$\frac{dn_1}{dt} = -(A_{10} + Q_{10} + Q_{12})n_1 + Q_{21}n_2 \quad (2.23)$$

$$\frac{dn'_1}{dt} = -(A'_{10} + Q'_{10})n'_1 + Q'_{21}n_2 \quad (2.24)$$

$$\frac{dn_2}{dt} = W_{02}n_0 + Q_{12}n_1 - (A_{20} + Q_{20} + Q_{21} + Q'_{21})n_2 \quad (2.25)$$

Under the assumption that the laser excitation time scale is much longer than  
the collisional time scales, we can set the LHS of Equations 2.23–2.25 to zero. This  
results in a closed set of linear equations, which can be expressed in matrix form as  
follows.

461

462

463

464

$$\begin{bmatrix} A_{10} + Q_{10} + Q_{12} & 0 & -Q_{21} \\ 0 & A'_{10} + Q'_{10} & -Q'_{21} \\ -Q_{12} & 0 & A_{20} + Q_{20} + Q_{21} + Q'_{21} \end{bmatrix} \begin{bmatrix} n_1 \\ n'_1 \\ n_2 \end{bmatrix} = \begin{bmatrix} 0 \\ 0 \\ W_{02}n_0 \end{bmatrix} \quad (2.26)$$

From Equation 2.26, we only need the solutions to  $n_1$  and  $n'_1$ . These solutions are  
presented in Equations 2.27–2.28.

465

466

$$n_1 = n_0 W_{02} Y \quad (2.27)$$

$$n'_1 = n_0 W_{02} Y' \quad (2.28)$$

The expressions for the respective fluorescence yields,  $Y$  and  $Y'$  are as follows,

$$Y = \frac{Q_{21}}{(A_{10} + Q_{10} + Q_{12})(A_{20} + Q_{20} + Q_{21} + Q'_{21}) - Q_{12}Q_{21}} \quad (2.29)$$

$$Y' = \frac{(A_{10} + Q_{10} + Q_{12})Q'_{21}}{(A'_{10} + Q'_{10})((A_{10} + Q_{10} + Q_{12})(A_{20} + Q_{20} + Q_{21} + Q'_{21}) - Q_{12}Q_{21})} \quad (2.30)$$

#### 2.4.2.1 Solution

Substituting the expressions from Equations 2.27–2.28 into Equation 2.22,

$$\Phi = n_0 V W_{02} (Y + Y') \quad (2.31)$$

Note the similarity in the form of Equation 2.31 to Equation 2.3. Both expressions are composed of two parts—a pumping rate and a fluorescence yield. Expanding the pumping rate  $W_{02}$  in a manner identical to Equation 2.7 and using the absorption integral in Equation 2.15, we can rewrite Equation 2.31 in a form mirroring Equation 2.21

$$\Phi = \frac{P}{c} \int_x n_{CH} (Y + Y') \sum_j f_j B_j \int_\nu \psi(\nu) \phi_j(\nu) d\nu dx \quad (2.32)$$

The expressions for the fluorescence yields,  $Y$  and  $Y'$ , still have many variables that have not been tabulated conveniently in literature. As a result, further simplifications will need to be made on the basis of reported experimental observations. These



simplifications are outside the scope of this chapter and will be introduced in Chapter 479  
4 along with the results of applying this model to various reactant mixtures. 480

## CHAPTER 3

481

### EXPERIMENTAL METHODS AND CONSIDERATIONS

482

The current chapter describes the facilities and apparatus used to study the flame characteristics in a Low Swirl Burner. The selection and implementation of diagnostic techniques used in this study are explained, as are data analysis methods used to process the acquired data.

483

484

485

486

#### 3.1 LSB Configurations

487

Two configurations of the Low Swirl Burner were tested for this study. There are referred to in what follows as Configurations A and B. Each configuration consists of the reactant flow inlet, the swirler device, the conduit to the combustion zone and the combustion zone itself. All swirlers tested for this work have an outer diameter,  $d_s$  of 38 mm (1.5 in). Other key dimensions of the swirlers tested are presented in Table 3.1.

488

489

490

491

492

493

Each configuration is housed in a high pressure testing facility. The testing facility consists of an air and fuel supply system, a pressure vessel with adequate optical access and an exhaust system for the products. Each testing facility is instrumented to measure temperatures and pressures which are then used to calculate various flow parameters of interest.

494

495

496

497

498

The design of the configurations tested, along with that of their respective test facilities are discussed in greater detail in this section.

499

500

Table 3.1: *The dimensions of the swirlers used and the respective perforated plates are presented. Each swirler is referred to by its vane angle (as in “ $S_{37^\circ}$ ”).*

Geometric parameter	Swirlers		
	Configuration A $S_{37^\circ}$	$S_{45^\circ}$	Configuration B $S_{40^\circ}$
<b>Swirler data</b>			
Outer diameter, $d_s$ , mm	38	38	38
Diameter ratio, $\frac{d_i}{d_s}$	0.66	0.66	0.66
Vane angle, $\alpha$	$37^\circ$	$45^\circ$	$40^\circ$
Theoretical Swirl Number, $S$	0.48	0.64	variable
<b>Perforated plate data</b>			N/A
Open area, mm <sup>2</sup>	155.97	156.98	-
Blockage, %	71.54	71.36	-
Plate thickness, mm	1.27	1.27	-
Hole pattern	1 - 8 - 16	1 - 8 - 16	-
Hole location (dia), mm	0 - 10.2 - 19.1	0 - 10.2 - 19.1	-
Hole diameter, mm	2.79 - 2.79 - 2.84	2.82 - 2.82 - 2.83	-

### 3.1.1 Configuration A

Preliminary experiments involving velocity field mapping and flame imaging were performed using this configuration. The schematic of the high pressure test facility housing this configuration is shown in Figure 3.1, while the configuration itself is shown in greater detail in Figure 3.2.

#### 3.1.1.1 Test Facility

Pressurized air is supplied from external tanks and heated in an indirect, gas-fired heat exchanger to about 500 K. The flowrate of the air is metered using a sub-critical orifice flow meter with a 38 mm (1.5 in) bore diameter Flow-Lin orifice plate capable of metering a maximum flow rate of 2.2 kg/s (1 lb/s). The orifice flow meter is instrumented with an Omega PX725A-1KGI pressure transmitter calibrated to a reduced pressure range of 0–2.758 MPa (0–400 psi), a shielded K-type thermocouple and an

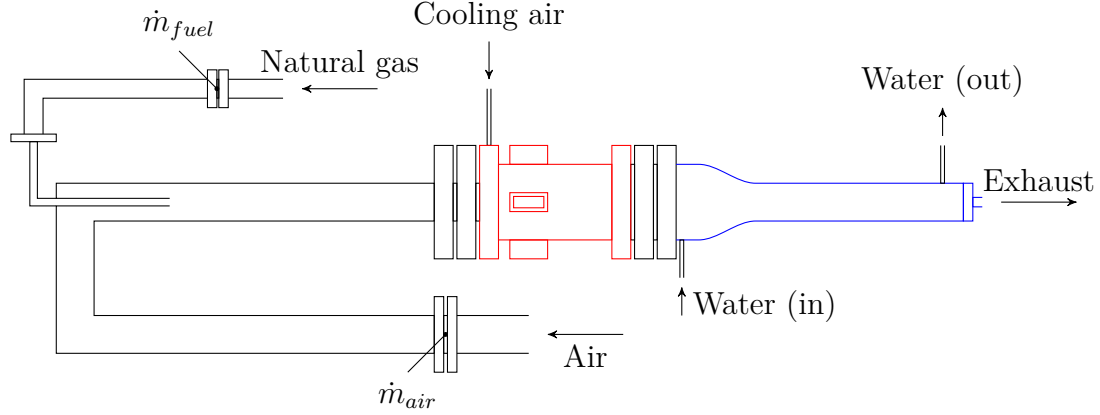


Figure 3.1: A schematic of the high pressure testing facility where Configuration A was operated is shown. The pressure vessel is outlined in red, while the water-cooled exhaust section is outlined in blue. The locations of the orifice flow meters used to measure the mass flow rates of the preheated air and natural gas fuel are indicated.

Omega PX771A-025GI differential pressure transmitter, calibrated to a reduced dif- 513  
ferential pressure range of 0–68.948 kPa (0–10 psid). The fuel (natural gas) is metered 514  
using a similar set up as the air line, with a sub-critical orifice flow meter. The fuel 515  
orifice plate is a Flow-Lin orifice plate with a bore diameter of 13.46 mm (0.53 in), 516  
capable of metering a maximum flow rate of 0.22 kg/s (0.1 lb/s). The upstream pres- 517  
sure is measured using an Omega PX725A-1KGI pressure transmitter (same as the 518  
air line) and the differential pressure is measured using a PX771A-100WDC differ- 519  
ential pressure transmitter with a pressure range of 0–2.489 kPa (100 in H<sub>2</sub>O). The 520  
temperature of the fuel is assumed to be the same as the nominal room temperature 521  
(300 K). 522

The air enters the inlet nozzle of the LSB through a 1.8 m (6 ft) long, 102 mm (4 523  
in) diameter straight pipe section. The fuel flow is choked prior to mixing with the air 524  
flow at the head of the straight pipe section. The straight pipe section allows for the 525  
flow to be fully developed, and fully premixed before the reactants enter the burner. 526  
The combustor pressure and temperature are measured at the head of the inlet nozzle. 527  
The pressure is measured by an Omega PX181B-500G5V pressure transducer with a 528  
pressure range of 0–3.45 MPa (0–500 psi), while the temperature is measured using 529

a K-type thermocouple.

The pressure and temperature measurements are used to calculate the four primary flow parameters (combustor pressure, preheat temperature, reference velocity and equivalence ratio) for the LSB in real time. All measurements are monitored and recorded during the course of the experiment by a LabView VI.

The pressure vessel enclosing the combustor is designed to withstand pressures of up to 30 atm and is insulated from the combustor by a ceramic liner. Cooling for the pressure vessel and the quartz tube is provided by a flow of cold air introduced at the head of the pressure vessel. The cold air is drawn from the same external tanks as the main air line, but bypasses the heating system. The cold air flow is not metered, but its upstream pressure is coupled to the main air line so as to ensure a steady flow of cold air into the pressure vessel at all operating conditions. Optical access to the combustor is provided through four 25 mm (1 in) thick, 150 mm (6 in)  $\times$  75 mm (3 in) quartz windows located 90° apart azimuthally. The view ports allow the combustor to be imaged from the dump plane to an axial distance of 150 mm (6 in) downstream.

The exhaust from the combustor is cooled by cold water circulated through a water jacket enclosing each section of the exhaust pipe. The length of the exhaust pipe sections is about 1.8 m (6 ft). The exhaust pipe section terminates in an orifice plug that provides back pressure to the combustion chamber. A different diameter orifice is used for each reference velocity condition tested. The exiting products finally pass through the building exhaust system.

### 3.1.1.2 Low Swirl Burner

The detail of the LSB configuration is shown in Figure 3.2. The premixed, preheated reactants reach the swirler through a converging nozzle that decreases linearly in diameter from the inlet diameter of 102 mm (4 in) to the outer diameter of the swirler, 38 mm (1.5 in). At the swirler, the flow splits into two streams—one passing

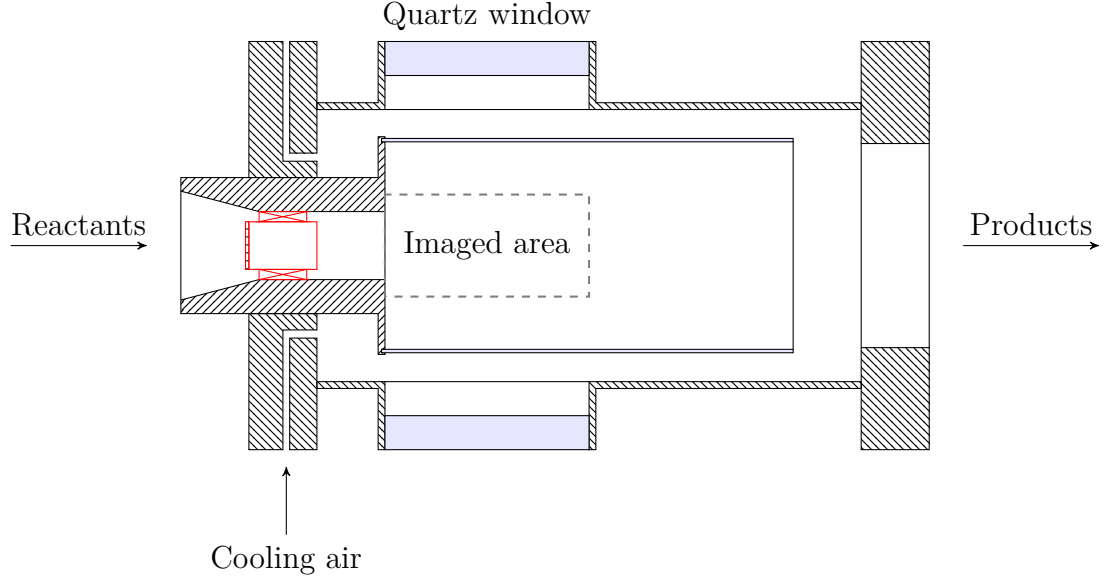


Figure 3.2: A cross-sectional view of Configuration A in the pressure vessel is shown. The reactants enter from the left. The products mix with the cooling air and leave on the right. The location of the swirler in the inlet nozzle is highlighted in red. Also shown is the region of the combustion zone that can be imaged through the quartz windows.

through the central section and another picking up swirl by flowing over the vanes in the annular region. The relative flow split between the two streams is controlled by inducing blockage into the central flow by means of a perforated plate. The swirler leads to a constant area nozzle, and is located one diameter upstream of an abrupt area change. At the area change, the reactants expand from the 38 mm (1.5 in) diameter nozzle into a 115 mm (4.5 in) diameter combustion zone. This expansion ratio is chosen so as to avoid confinement effects on the centerline flame flow field.<sup>[25]</sup>

The main combustion zone begins at the dump plane and is enclosed by a GE 214 quartz tube. The quartz tube is 300 mm (12 in) long and 115 mm (4.5 in) in diameter. The thickness of the quartz tube is 2.5 mm (0.1 in).

### 3.1.2 Configuration B

This configuration is used to image the flame structure of the LSB flame using CH PLIF. A schematic of the flow system of the test facility is shown in Figure 3.3, while

the LSB combustor itself is shown in greater detail in Figure 3.4.

### 3.1.2.1 Test Facility

This test facility shares the upstream supply of preheated air, cold air and fuel (natural gas) with the one used in Configuration A. The flow rate of the preheated air stream is measured using the same orifice flow meter system used in Configuration A—albeit with a smaller 12.921 mm (0.5087 in) diameter bore Flow-Lin orifice plate. The fuel system pressure is regulated from the building supply pressure to a lower required pressure by an adjustable TESCO regulator and metered using a critical orifice flow meter. The critical orifice on the fuel line has a bore diameter of 0.8128 mm (0.032 in). The pressure upstream of the critical orifice is measured using an Omegadyne PX409-1.5KGI pressure transmitter with a range of 0–10.34 MPa (0–1500 psig) and the pressure downstream of the critical orifice is measured using a Dwyer 626 series pressure transmitter with a range of 0–3.45 MPa (0–500 psig). The downstream pressure can be used to verify if the critical orifice is choked during operation. The temperature of the fuel is measured upstream by a K-type thermocouple.

The air system is choked with a 5.41 mm (0.213 in) diameter critical orifice before mixing with the fuel. A short distance after mixing, the reactants are split into two separate streams for the central flow and the swirl flow. The central flow rate is measured using a 9.271 mm (0.365 in) diameter sub-critical orifice, instrumented with a Dwyer 626 series pressure transmitter with a range of 0–4.14 MPa (0–600 psig) for measuring the upstream pressure, a K-type thermocouple for measuring the upstream temperature and an Omega PX771-300WCDI differential pressure transducer with a range of 0–74.65 kPa (0–300 in H<sub>2</sub>O). The swirl flow rate is measured similarly, using a 11.68 mm (0.46 in) diameter sub-critical orifice, a Dwyer 626 series pressure transmitter with a range of 0–5.52 MPa (0–800 psig), a K-type thermocouple and another Omega PX771A-300WCDI with a differential pressure range of 0–74.65 kPa

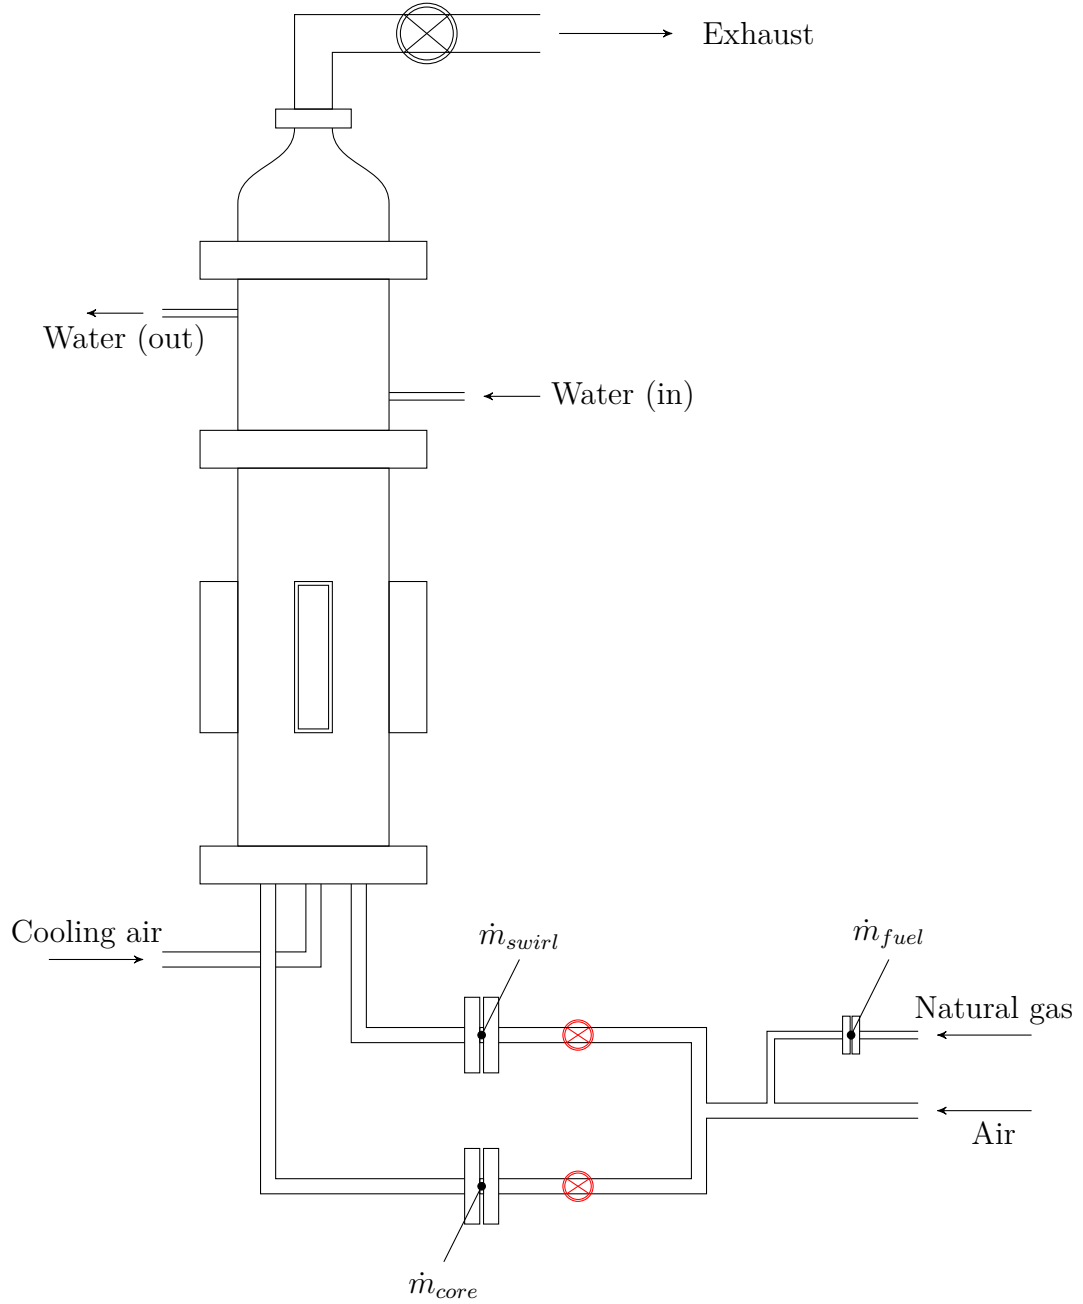


Figure 3.3: A schematic of the high pressure testing facility where Configuration B was operated is shown. The locations of the orifice flow meters on the reactant streams and fuel lines are shown. Valves (shown in red) on the swirl and core flow lines allow for the relative mass flow split to be varied between the two reactant streams. The upstream orifice flow meter on the preheated air line is not shown here.



(0–300 in  $\text{H}_2\text{O}$ ). The relative flow split between the two reactant streams is controlled by partially closing gate valves on the two lines. The cooling air flow line is choked, but the flow rate is not metered. All measurements are monitored and recorded by a LabView VI.

The pressure vessel is rated for pressures in excess of 30 atm and is insulated from the combustor by a flow of cold air. The cold air enters the pressure vessel through two inlet ports and passes through a layer of steel ball bearings which renders the flow uniform spatially. The central and swirl flow reactant streams enter through separate ports and connect to the combustor. The pressure vessel has four viewports located  $90^\circ$  apart for optical access. Each viewport is covered by a 25 mm (1 in) thick, 178 mm (7 in)  $\times$  50 mm (2 in) quartz window. The LSB exit is located approximately halfway between the top and bottom edges of the window, allowing about 88.9 mm (3.5 in) of the combustion zone to be imaged through the window. Similar to Test Rig A, the exhaust section is cooled by circulating cold water through an enclosing water jacket. An adjustable gate valve on the exhaust line provides the back pressure necessary to pressurize the combustor. The products are vented into the same building exhaust system as Configuration A.

### 3.1.2.2 Low Swirl Burner

The design of this LSB configuration is presented in Figure 3.4. As described earlier, the reactants reach the LSB swirler device through two separate streams. The core/central stream passes through a plenum chamber that is filled with steel ball bearings before approaching the swirler through a smoothly contoured nozzle with a high contraction ratio. The annular/swirl stream reaches the swirler directly through a separate contoured nozzle. The contraction ratio is chosen to inhibit the formation of thick boundary layers in the reactant streams. The core stream passes through the central portion of the swirler, while the annular stream picks up swirl by passing

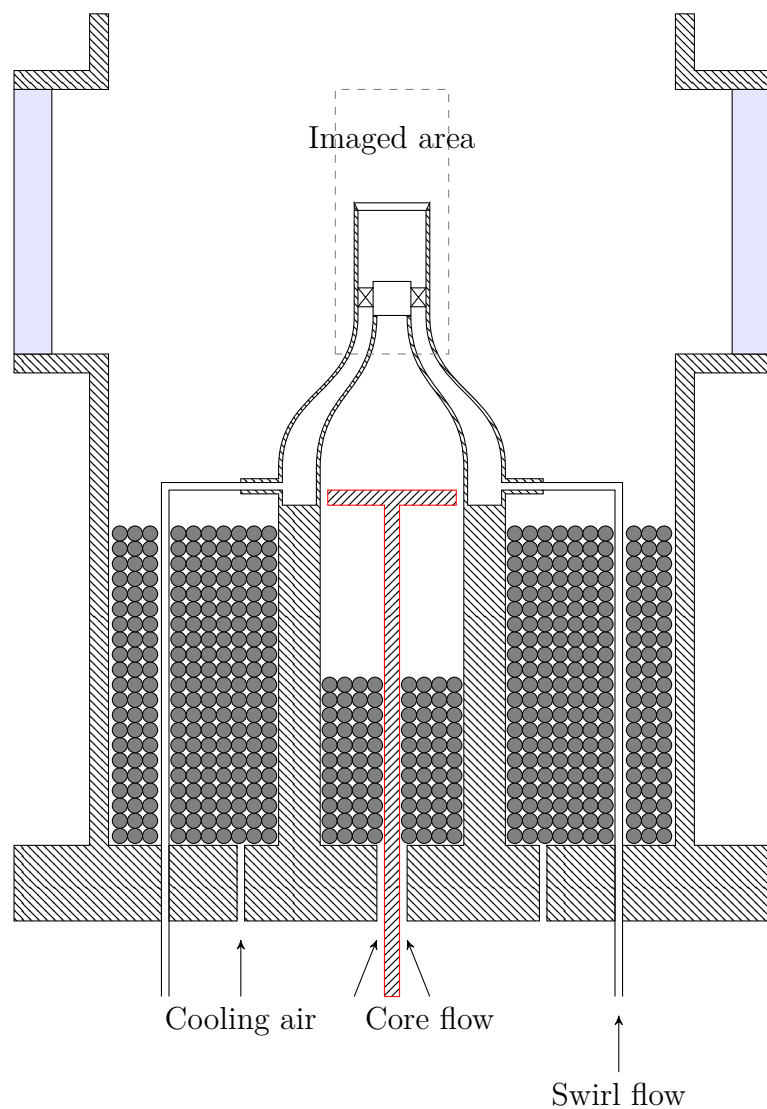


Figure 3.4: A cross-sectional view of Configuration B in the pressure vessel is shown. The reactants enter from below in two separate streams (core flow and swirl flow), along with cooling air. Stainless steel ball bearings inside the plenum chamber and outside make the core flow and the cooling air flow spatially uniform. The turbulence generator is located within the plenum and is outlined in *red*.

through the vanes of the swirler. The swirler lacks a perforated plate covering the central region as the primary function of the plate—regulating the relative mass flow split—is performed by the test facility itself.

The swirler device is located at the beginning of a constant area nozzle which is 57.2 mm (2.25 in) in length. Following this, the reactants expand into the combustion zone.

Unlike Configuration A, there is no dump plane or quartz tube to provide confinement to the combustion zone. The co-flow of cold air provides insulation to the walls of the pressure vessel. Also, as mentioned earlier, the relative mass flow split between the central and annular flows can be controlled directly. Finally, the level of turbulence in the central flow can be adjusted by use of a turbulence generator[45] located upstream in the plenum chamber.

## 3.2 Diagnostics

### 3.2.1 Laser Doppler Velocimetry

The velocity field of the LSB is mapped using a TSI 3-component LDV system. Three wavelengths (514 nm, 488 nm and 476 nm) are separated from the output of a 5 W Argon ion laser by an FBL-3 multicolor beam generator. The individual beams are split into two coherent beams, which are then focused to intersect and produce interference fringes within an ellipsoidal measurement volume with dimensions of the order of 100  $\mu\text{m}$ . For this purpose, two transceiver probes are mounted 90° apart about the axis of the LSB. The setup is illustrated in Figure 3.5. One transceiver probe focuses the 514 nm and 488 nm beams in planes perpendicular to each other, while the second probe focuses the 476 nm beams orthogonal to the other two beams. Particles in the flow field crossing the interference fringes scatter the laser light elastically and produce a sinusoidal signal whose frequency is proportional to the velocity of

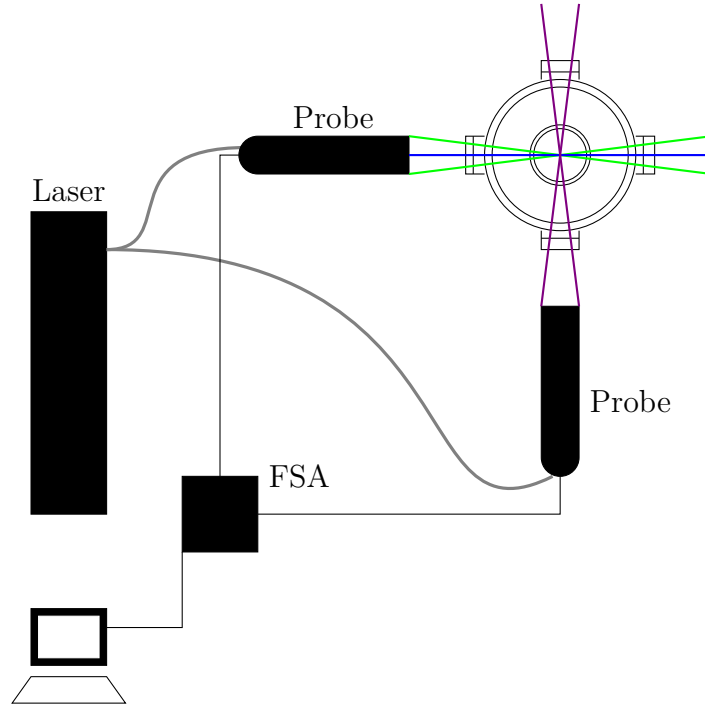


Figure 3.5: The schematic shows the setup employed to map the velocity field of the LSB combustor using Laser Doppler Velocimetry. Three pairs of orthogonal beams are separated from the Argon Ion Laser output and conveyed by fiber optic cables (gray) to optical probes mounted  $90^\circ$  apart about the axis of the LSB combustor. The green, blue, and violet beams in the schematic represent the 514 nm, 488 nm and 476 nm wavelengths. The signal is collected by the transceiver probes and analyzed by the FSA module. The results are saved for further analysis.

the particle. The transceiver probes collect this scattered light and each wavelength is detected separately by a PDM-1000-3 three-channel photodetector module. The output from the photodetector is processed by an FSA-3500-3 signal processor. The resulting three components of the particle/flow velocity are recorded by the FlowSizer software.

Since the concentration of particulate matter (primarily dust particles) in the airflow is very low, the flow needs to be artificially seeded to facilitate LDV measurements in a reasonable amount of time. The choice of seeding particles to be used and their mean diameter are decided by the characteristics of the flow to be imaged.[46] Since the LSB flow field is a reacting one, the particles need to have high melting points. Further, the particles need to be small enough to follow the flow closely and large enough or reflective enough to scatter light efficiently in the measurement volume. Based on these requirements, commercially available alumina particles with a mean particle diameter of  $5\text{ }\mu\text{m}$  were chosen for this study. In order to uniformly seed the flow, a novel seeding generator was designed as described in Appendix A. The seeding particles were introduced slightly upstream of the 1.8 m (6 ft) long straight pipe section in Test Rig A.

LDV data is only acquired at atmospheric pressure conditions. At high pressure conditions, the reacting LSB flow field produces sharp refractive index gradients that rapidly shift in the turbulent flow field. This causes strong beam steering effects making it very difficult for the laser beams to reliably intersect within such a small measurement volume.[47] The long distance traveled by the beams in the test rig further exacerbate this problem, making LDV data nearly impossible to acquire at such conditions.


### 3.2.2 CH\* Chemiluminescence

The LSB flame is imaged using one of two 16-bit intensified CCD cameras—PI Acton 1024×256 or 512×512 pixels—with a 28 mm f/2.8 camera lens. The quantum efficiency of the 18 mm Gen III HB filmless intensifier used by the 512×512 camera is about 45% at 430 nm, while the 25 mm Gen II intensifier used by the 1024×256 camera manages about half that at the same wavelength. CH\* chemiluminescence is filtered using a bandpass filter centered on 430 nm with a FWHM of 10 nm. At each operating condition, 100 instantaneous images are acquired with an exposure of 1 ms. An additional 100 instantaneous images are acquired with no flame and averaged to yield the background for correcting the flame images.


#### 3.2.2.1 Image Processing

The acquired flame chemiluminescence images are background-corrected and averaged. The resulting mean is the line-of-sight integrated, time-averaged image of the flame. Strictly speaking, this is not the same as a real average obtained from a long exposure image as the instantaneous images are obtained through a periodic sampling process and hence, are prone to statistical errors. However, the behaviour of the flame can be assumed to be sufficiently random that the mean obtained is adequately representative of the true average. Figure 3.6a shows a typical mean CH\* chemiluminescence image prepared in this manner.


Even when background-corrected, the walls of the combustor are not at zero intensity in the average chemiluminescence image. This is particularly noticeable near the dump plane where there is no flame present and yet the walls are clearly illuminated. The source of this background illumination is mostly the chemiluminescence from the flame scattering off the combustor and pressure vessel walls. The contribution from blackbody radiation from the heated walls is less significant in the narrow wavelength range imaged. This is evident from images acquired immediately after a

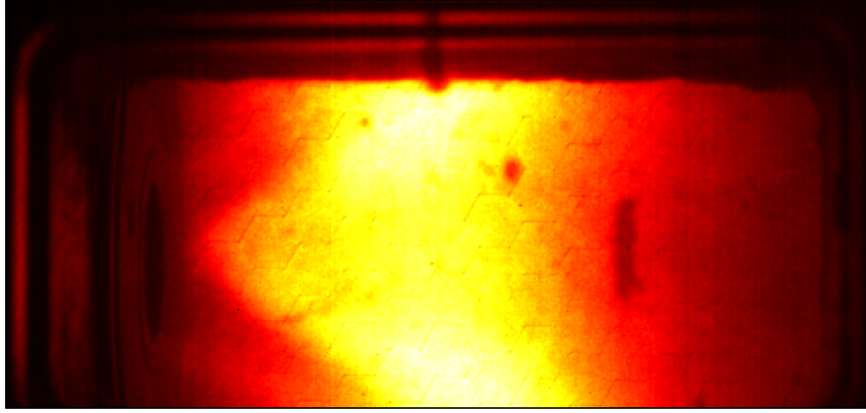

(a) Average  $CH^*$  chemiluminescence image

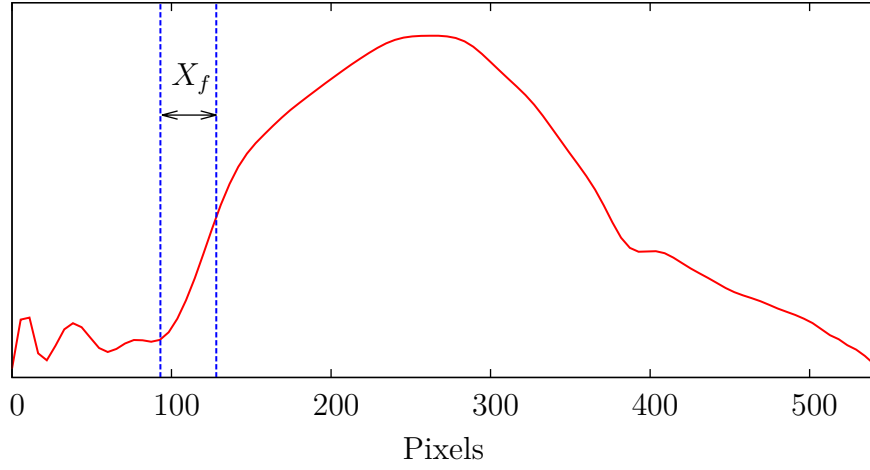

(b) Centerline  $CH^*$  chemiluminescence intensity

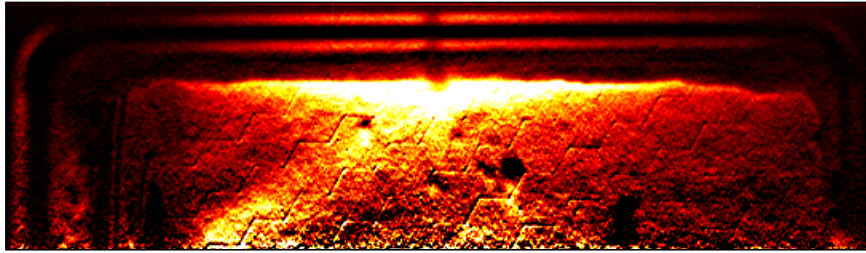

(c) Abel deconvoluted half-image

Figure 3.6: These images illustrate the processing of a typical  $CH^*$  chemiluminescence dataset. The top image is the mean of 100 frames and shows the LSB flame at 9 atm. The flame standoff distance is calculated by locating the inflection point in the smoothed intensity profile (middle). An Abel deconvolution (bottom) can be used to highlight the flame brush and measure the angle of the flame.

flame blowout, which show the walls to be nearly dark even though they should still  
be hot.

The averaged chemiluminescence image allows us to measure the flame stand-  
off distance by following the intensity profile along the centerline of the combustor.  
The intensity profile rises sharply when passing the flame standoff location. Thus,  
the flame standoff location can be ascertained by finding the inflection point in the  
intensity profile.

The profile of the average chemiluminescence intensity along the centerline of the  
sample case from Figure 3.6a is shown in Figure 3.6b, showing the flame standoff  
distance. The distance from the dump plane, measured in number of pixels on the  
image and scaled by the appropriate magnification factor yields the flame standoff  
distance,  $X_f$ . The determination of the flame standoff location by this method pro-  
vides a suitable and deterministic means to locating the leading edge of the flame  
front.

The average image can be processed further to yield more spatially resolved in-  
formation about the flame brush. Under the reasonable assumption that the average  
LSB flame is axially symmetric about the centerline of the combustor, a tomographic  
deconvolution technique called an Abel deconvolution[48] can be used to convert the  
line-of-sight integrated image to a radial map of chemiluminescence intensity. In  
effect, this shows the shape and structure of the average flame brush. The Abel  
deconvolution of the sample data from Figure 3.6a is shown in Figure 3.6c.

The Abel-deconvoluted image provides a relatively easy means of determining the  
flame brush angle. A straight line joining two points located at the center of the  
flame brush intersects the axis of the combustor at this angle. The angle of the flame  
is denoted by  $\theta_f$ .

Using the Abel deconvolution to study the flame brush suffers from two main  
drawbacks. First, the system of equations describing the Abel deconvolution is only



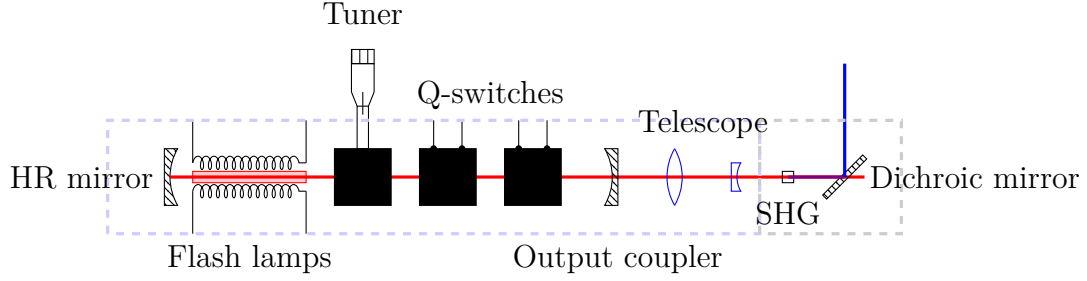


Figure 3.7: A schematic of the components of the PAL 101 Alexandrite laser is shown. The resonator formed by a High Reflection (HR) mirror and an output coupler is built around an alexandrite rod (red) pumped by flashlamps. The frequency of the output is selected by a tuner mechanism. Only one of the two Q-switches was used for this study. The laser beam is reduced in diameter by a collimating telescope (blue) before passing through the Second Harmonic Generator (SHG). The UV beam is separated from the fundamental by a dichroic mirror and exits the laser. The fundamental beam terminates within the laser in a beam dump.

valid as long as the entirety of the flame is visible. This is only satisfied in the initial  
region of the LSB where the diameter of the flame brush is smaller than the height of  
the optical viewport. At further downstream locations, the flame is not imaged in its  
entirety. This causes the spurious bright regions near the top of the window in Figure  
3.6c. The second limitation of the Abel deconvolution technique stems from the high  
incidence of errors along the centerline (where  $r \rightarrow 0$ ). Due to this, any study of  
the flame brush thickness at the flame stabilization point—a metric of considerable  
importance—is all but impossible using this tomographic technique.

### 3.2.3 CH Planar Laser-Induced Fluorescence

The CH PLIF setup uses the frequency-doubled output of a Light Age PAL 101  
alexandrite laser tuned to  $\lambda \approx 387.2$  nm. The design of the laser is shown schemat-  
ically in Figure 3.7. The active medium is a 150 mm (6 in) long, 5 mm (0.197  
in) diameter alexandrite rod. The rod is placed between two flashlamps within the  
resonator cavity formed by two spherical mirrors. A birefringent tuning element is  
placed within the resonator to allow the user to select the frequency of the output  
beam. The tuning element is coupled to a micrometer whose reading relates linearly

to the output wavelength. The birefringent filter allows the fundamental wavelength 739  
to be varied between 720–780 nm, with peak gain at about 755 nm. The resonator 740  
cavity also contains two Q-switches, which allow the laser to optionally operate in 741  
double-pulsed mode. For this study, however, only one Q-switch is used and the laser 742  
is operated in single-pulsed mode only. 743

The diameter of the fundamental beam exiting the output coupler is reduced by a 744  
collimating telescope. This is done in order to increase the efficiency of conversion of 745  
the frequency-doubling crystal. The second harmonic portion of the beam is separated 746  
from the fundamental by a dichroic mirror and exits the laser. The fundamental beam 747  
is terminated at a beam dump within the laser. The exit beam diameter is about 1 748  
mm. 749

The alexandrite laser is capable of operating at frequencies of up to 15 Hz. Laser 750  
power is controlled primarily by varying the voltage applied to the flash lamps. When 751  
operating with a high flash lamp voltage, it is recommended that the frequency of 752  
pulsing be reduced to allow more time to dissipate the heat build up within the 753  
alexandrite rod. All experiments conducted as part of this study operated the laser 754  
at 10.0 Hz. 755

The typical power output of the laser is about 15 mJ/pulse. The pulsewidth of 756  
the laser is about 60-80 ns, as measured by a fast photodiode, and the pulsewidth 757  
decreases with increasing flash lamp voltage. The linewidth of the fundamental beam, 758  
as reported by the manufacturer, is 150 GHz at  $\lambda = 775$  nm. Assuming the spectral 759  
profile of the laser to be a Gaussian, the linewidth of the frequency-doubled beam 760  
can be determined. The Full Width at Half Max (FWHM) of a Gaussian curve scales 761  
linearly with the standard deviation of the curve. When convoluted with itself, the 762  
new standard deviation is  $\sqrt{\sigma^2 + \sigma^2}$  or  $\sqrt{2}$  times that of the original curve. Thus, the 763  
linewidth of the frequency doubled output is  $150 \times \sqrt{2} = 212$  GHz or  $7.07 \text{ cm}^{-1}$ . In 764  
wavelength units, this represents a spread of about  $1.06 \text{ \AA}$ . 765

### 3.2.3.1 Imaging System

All of the PLIF imaging is performed with an intensified PI Acton 512×512 camera. The intensified camera is equipped with an 18 mm Gen III HB filmless intensifier with a quantum efficiency of about 45% in the 420–440 nm range. The lens is chosen depending on imaging requirements of each experiment. In all imaging experiments, elastic scattering from the laser beam is attenuated by a 3 mm thick GG 420 Schott Glass filter.

### 3.2.3.2 Laminar Flame Setup

Preliminary experiments to evaluate the CH PLIF technique are performed on a laminar flame. The choice of a laminar flame as the subject allows us to neglect effects of strain and turbulence on the flame. Further, laminar flames are more readily simulated by reaction kinetics packages like Chemkin with high fidelity.

These experiments are conducted on a laminar, methane-air flame stabilized on an unpiloted Bunsen burner with an inner diameter of 10.16 mm (0.4 in). The air flow rate is measured and regulated using a Dwyer rotameter with a range of 0–20 SCFH calibrated using a Ritter drum-type gas meter. The natural gas flow rate is metered using a Matheson FM 1050 602 rotameter with a range from 0–1230 SCCM. This flowmeter is calibrated using a Sensidyne Gilibrator 2 bubble flow meter system.

### 3.2.3.3 Laser Wavelength Calibration

As described earlier, the output wavelength of the PAL 101 alexandrite laser is controlled using a micrometer-coupled birefringent tuning mechanism. The wavelength of the laser beam varies linearly with the micrometer reading. Initially, the manufacturer-supplied calibration for the micrometer was found to be inaccurate. This required an experiment to calibrate the laser output wavelength against the micrometer reading in order to determine the slope and offset of the calibration curve

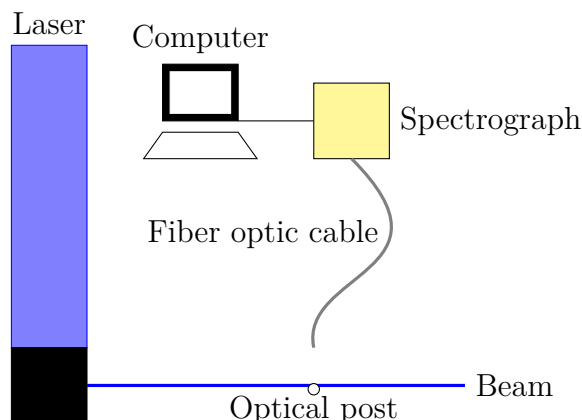


Figure 3.8: The figure above shows the schematic of the experiment performed to calibrate the wavelength of the laser output. The laser output (containing mostly UV, but also a small portion of the fundamental frequency) is glanced off a steel optical post. The scattered light is gathered by a fiber optic cable (gray) and sent to a spectrometer. The spectrum is analyzed to track the location of the fundamental frequency with tuner position. The UV peak is not tracked as the spectrometer is not calibrated for that wavelength.

accurately.

A schematic of this experiment is shown in Figure 3.8. The laser beam is glanced off a steel optical post and the scattered light is collected using a fiber-optic cable coupled to an Ocean Optics HR 2000 spectrometer. The spectrometer is pre-calibrated using 50 wavelengths in the 400–850 nm range from the output of a neon discharge lamp source. The spectrometer is also intensity corrected over this range using a black body source. The estimated error in the resolution of the device is about 0.1 nm (1 Å).

The laser micrometer is traversed from 0.600 in to 0.625 in in steps of 0.001 in. The experiment is repeated by traversing the micrometer from 0.625 in back to 0.600 in along the same points to ensure repeatability and estimate the variation due to hysteresis. The calibration is performed using at the fundamental wavelength of the laser as the second harmonic wavelength falls outside the spectrometer’s range. Each spectrum recorded is integrated over 512 ms and averaged over 10 such acquisitions. The background-corrected peak of the spectrum is then modeled as a Gaussian and the location of the center of the Gaussian waveform is recorded.

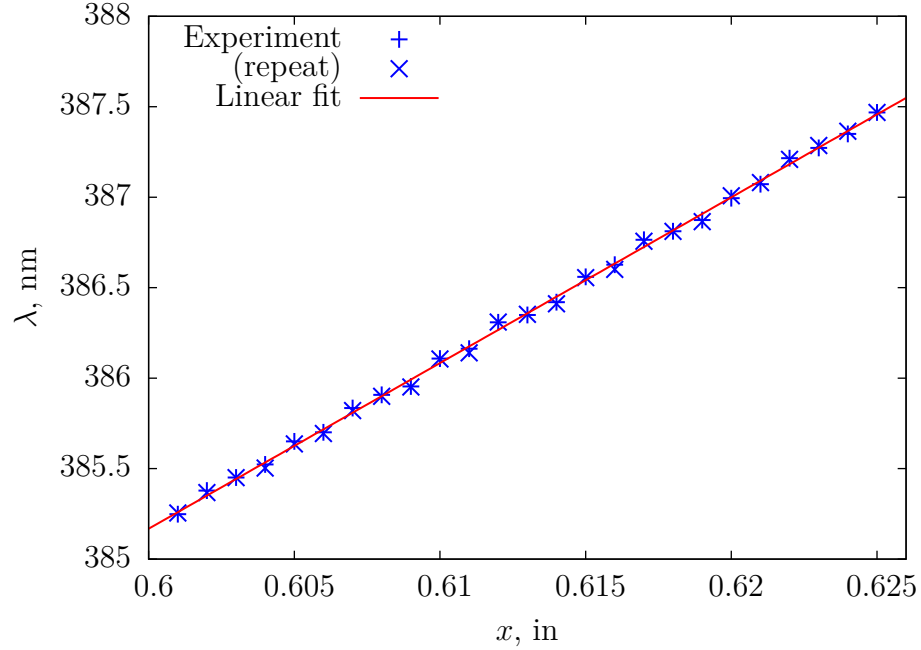


Figure 3.9: The wavelength of the second harmonic beam of the laser is plotted above against the tuner position( $x$ ). The data shows excellent repeatability and falls on a linear trend. The equation for the linear curve fit is  $\lambda = 330.213 + 91.5908x$ , where the units of  $\lambda$  and  $x$  are nm and in, respectively.

The results from this experiment are shown in Figure 3.9. The plot demonstrates that the variation of the second harmonic wavelength (obtained by halving the fundamental wavelength) with the position of the tuner micrometer is linear. Further, there is little difference between the measurements taken while increasing and decreasing the micrometer position. This indicates that any effects of hysteresis in the micrometer position are minimal. The calibration equation relating the micrometer position to the output wavelength is obtained by applying a linear curve fit to the data points on the graph as shown in Figure 3.9.

## CHAPTER 4

815

### CH PLIF SIGNAL MODELING AND VALIDATION

816

#### 4.1 CH PLIF Preliminary Experiments

817

The CH PLIF imaging system was evaluated for use in imaging hydrocarbon flames by performing two preliminary experiments. First, an excitation scan was performed to confirm the location of the optimal wavelength to excite the CH radicals in a typical hydrocarbon flame. Second, a test of the linearity of the LIF signal with respect to the incident laser intensity was performed. The setup and results of these experiments are described in the following subsections.

823

##### 4.1.1 Excitation Scan

824

An excitation scan is performed by tuning the output of the alexandrite laser from  $\lambda = 387.077$  nm to 387.260 nm. This serves two purposes. First, it locates the optimal wavelength to excite the CH radicals that results in the highest fluorescence yield. Second, the variation of the signal intensity can be compared with simulated profiles from LIFBASE or other spectroscopic calculations and our estimation of the laser linewidth can be validated. The laser linewidth is an integral parameter and appears in the absorption integral used by the models developed in Chapter 2.

825

826

827

828

829

830

831

A schematic of the excitation scan experiment is shown in Figure 4.1. The intensified PI Acton 512×512 camera described in Section 3.2.2 is used to image a premixed, laminar methane-air flame operating at close to stoichiometric conditions. The laminar flame is stabilized on the Bunsen burner described in Section 3.2.3.2. The alexandrite laser is operated at a power of 16 mJ/pulse in the second harmonic. The sheet forming optics consist of a +50 mm cylindrical lens and a +250 mm spher-

832

833

834

835

836

837

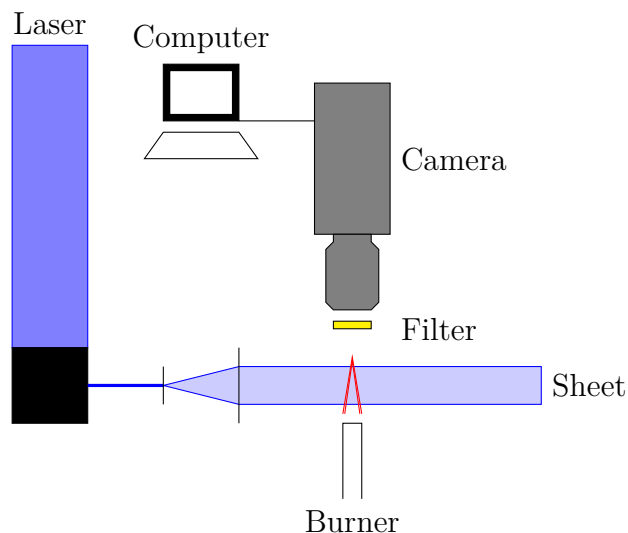


Figure 4.1: The figure above shows the schematic of the excitation scan experiment. A collimating pair of lenses form the laser beam into a sheet focused over a laminar Bunsen burner. The fluorescence is imaged perpendicularly by an intensified camera synchronized to the laser pulse. A 3 mm GG 420 filter is used to reject elastic scattering.

ical lens placed 300 mm apart. The optics form the beam into a collimated sheet  
about 25 mm (1 in) tall, focused to a thickness on the order of  $250\ \mu\text{m}$  at the flame  
location. The sheet passes through the center of the flame and the edges of the sheet  
are blocked by razor blades to prevent reflections from the burner from saturating  
the camera.

The induced fluorescence in the flame sheet is imaged perpendicularly by the in-  
tensified camera using an 85 mm f/1.8 Nikon AF Nikkor lens. A 3 mm thick 50  
mm $\times$ 50 mm square GG 420 Schott glass filter is used to reject elastic scattering  
at the excitation wavelength. This setup gives a magnification of approximately 62  
 $\mu\text{m}/\text{pixel}$ . The camera is triggered by the flash lamp sync signal from the laser sys-  
tem and the intensifier is gated over 300 ns, encompassing the 70 ns laser pulse. The  
long gate width gives the intensifier enough time to prepare to receive the fluores-  
cence, preventing signal loss due to irisng. The gate width is still short enough that  
minimal flame chemiluminescence or ambient lighting is recorded in the images. 100  
instantaneous images are acquired for each excitation wavelength to acquire a good

estimate of the mean fluorescence signal,  $\mu_{sig}$ .

Figure FIXME shows a sample CH PLIF image from this dataset. The images are background-corrected by subtracting the laser scattering (recorded without the flame). The fluorescence signal is calculated from these images using three alternate approaches.

In Method I, two “windows” are identified that include the straight sections of the laminar flame. The average fluorescence signal in each frame is calculated by taking the average of all the emitting pixels in the two windows. A pixel is designated as an emitting pixel if its intensity exceeds the standard deviation of a typical background pixel by at least a factor of five. The average of this value over all the frames is designated as the mean fluorescence signal,  $\mu_{sig}$ . In Method II, the intensity of the pixels is integrated over a straight line connecting the inner and outer edges of the flame. The straight line is chosen along the beam so that the beam intensity does not vary along the integration path. The integration is performed on the left and right arms of the flame, giving two readings per frame. The mean of these values over all the frames is recorded as the mean fluorescence signal,  $\mu_{sig}$ . In Method III, the midpoints of the straight lines from Method II are located and the average of their intensities, over all the frames is recorded as the mean fluorescence signal,  $\mu_{sig}$ . The regions of interest for each of these methods is highlighted in Figure FIXME.

The result of this investigation is shown in Figure FIXME. The calculated mean fluorescence signals from the three methods are plotted against a LIFBASE simulation of the absorption spectrum of the CH  $B-X$  transition. The profiles are appropriately scaled to match the LIFBASE simulation at the maximum value and at the minimum value. The LIFBASE simulation is performed for a thermalized system at 1800 K, at atmospheric pressure. Further, the instrument linewidth is specified to be the same as our estimate of the laser linewidth (1.06 Å).

The profiles of the calculated and scaled mean fluorescence signals are observed to



agree extremely well with the LIFBASE simulation result. The discrepancies between  
the three methods is minimal.

The results indicate that the optimal excitation wavelength, corresponding to the  
highest mean fluorescence signal, is about 387.2 nm. For the rest of the experiments  
performed in this work, the laser is operated at this wavelength. The results also  
help verify that the calibration of the micrometer is accurate and the wavelengths are  
precisely adjustable. Finally, the results validate that our estimated laser linewidth,  
1.06 Å, is accurate. This value can now be used in subsequent calculations of the LIF  
signal levels.

#### 4.1.2 Linearity Test

As explained in Chapter 2, the variation of the fluorescence signal with the excitation  
laser intensity exhibits a saturation curve. For reasons mentioned in that discussion,  
we prefer to operate in the weak excitation limit. Further, the models developed in  
Chapter 2 for calculating the signal are intended to be used in the linear regime.  
Hence, an experiment is performed to verify the linearity of the system response at  
the intensities at which the flames are imaged for this work. The schematic of the  
setup is shown in Figure FIXME. The laser is tuned to the optimal wavelength as  
determined in Section 4.1.1, and operated at 10 Hz. The frequency-doubled beam is  
directed at a steady, laminar, methane-air Bunsen flame operating at a slightly rich  
stoichiometry. The edges of the beam are clipped by an aperture to produce a sharp  
edge and to avoid unnecessary reflections from the burner. No optics are used to  
refract the beam in any way.

The flame is imaged by the PI Acton 512×512 intensified camera equipped with a  
50 mm, f/1.8 AF Nikkor lens. Elastic scattering is attenuated by a 3 mm thick GG 420  
Schott glass filter. The magnification achieved by this set up is about 44 μm/pixel.  
The LIF signal from the flame is recorded in 300 ns gates and accumulated 150 times

before being read out. For each case, a corresponding laser scattering image is also  
recorded for estimating the background. The flame chemiluminescence and ambient  
background are also recorded for the same purpose.

For this experiment, varying the intensity of the laser beam by changing the flash  
lamp voltage or even the Q-switch timing is not preferred as either would alter the  
pulse width of the beam. Instead, quartz disks and blocks of varying thickness are  
introduced into the beam to produce an intensity loss, while preserving all other char-  
acteristics of the beam. The quartz elements decrease the intensity of the laser beam  
through reflection, scattering and absorption. The stray reflections and scattering  
from the quartz elements are contained by enclosing the elements in a box and pre-  
venting these from being recorded by the camera. In this manner, the laser power is  
varied from 10 mJ/pulse to 0.5 mJ/pulse and back.

The acquired images are background-corrected and the intensity is conditionally  
averaged over pixels with a non-zero intensity in the region where the fluorescence  
occurs. The average fluorescence intensity values thus obtained are plotted against  
the corresponding laser intensity and shown in Figure FIXME. A sample image high-  
lighting the region of interest is also shown alongside.

The LIF signal is observed to increase monotonically with increasing laser inten-  
sity. At the lower intensities, the variation is very nearly linear, with marginal scatter  
and only one significant outlier. At intensities above 1 J/cm<sup>2</sup> however, there is sig-  
nificant scatter in the data and the linear trend obtained from the low intensity cases  
cannot be reliably extended over this region.

The results indicate that as long as the intensity of the laser sheet is kept below  
1 J/cm<sup>2</sup>, the assumption of operating in the linear regime is valid.

Table 4.1: *The coefficients of spontaneous emission for transitions in the CH system are provided.*

Transition	Symbol	A, s <sup>-1</sup>
$B \rightarrow X(0, 0)$	$A_{20}$	$2.963 \times 10^6$
$A \rightarrow X(1, 1)$	$A_{10}$	$1.676 \times 10^6$
$A \rightarrow X(0, 0)$	$A'_{10}$	$1.832 \times 10^6$

## 4.2 Fluorescence Signal Modeling

Chapter 2 presented analysis of LIF signal calculation as a function of thermodynamic conditions and the local composition in a flame. Expressions derived using a basic model (Equation 2.21) and a more complex model (Equation 2.32) were presented. The expressions rely on knowledge of several physical values and specific spectroscopic constants pertaining to the CH system.

The basic model requires us to know the Einstein coefficient for spontaneous emission from the “upper” state to the “lower” state. For this, we assume that the “upper” state has the same properties as the  $A^2\Delta$ ,  $v = 0$  state. The improved model, needs the emission coefficients for the  $B^2\Sigma^-$ ,  $v = 0$  and  $A^2\Delta$ ,  $v = 0, 1$  states. These are tabulated from sources in literature[44, 49] FIXME in Table 4.1.

Next, to calculate the fluorescence yield for the basic model, we need to know the quenching cross-sections of major species found in the flames of interest. These cross sections are curve-fitted from several experiments performed over varying ranges of temperature. The functional forms of these cross-sections are presented in Table 4.2.

The fluorescence yield expressions for the complex model require the rates of collisional transfer between several energy levels. There have been efforts to measure and model these rates, but the energy level model used for these studies is more complicated and cannot be easily reconciled with our simplified model. Hence, it would be preferable to make some simplifying assumptions so that the collisional

Table 4.2: *The functional form of the quenching cross-sections of various species with CH are provided.*

Species	$\sigma, \text{\AA}^2$
H <sub>2</sub>	$6.1 \exp(-686/T)$
H	$221T^{-0.5} \exp(-686/T)$
O <sub>2</sub>	$8.61 \times 10^{-6} T^{1.64} \exp(867/T)$
OH	$221T^{-0.5} \exp(-686/T)$
H <sub>2</sub> O	9.6
CH <sub>4</sub>	$52.8T^{-0.5} \exp(-84/T)$
CO	8.31
CO <sub>2</sub>	$8.67 \times 10^{-13} T^{3.8} \exp(854/T)$
C <sub>2</sub> H <sub>6</sub>	13.4
N <sub>2</sub>	$1.53 \times 10^{-4} T^{1.23} \exp(-522.1/T)$
C <sub>3</sub> H <sub>8</sub>	22

rates can be reduced in terms of the quenching rate.

Previous work has reported that the rate of quenching does not appreciably vary over the vibrational manifold, but excited CH molecules in the  $B^2\Sigma^-$  electronic state are approximately 30% more likely to be quenched than molecules in the  $A^2\Delta$  states. This allows us to eliminate  $Q'_{10}$  and  $Q_{20}$  as follows.

$$Q'_{10} = Q_{10} = Q \quad (4.1)$$

$$Q_{20} = 1.3Q \quad (4.2)$$

Our next assumption is based on work by Luque et al.[41] FIXME who reported that the rate of transfer following the  $B^2\Sigma^- \rightarrow A^2\Delta (0,1)$  transition accounts for almost 24% of the collisional removal of CH from the upper electronic state. This allows us to formulate one more equation as shown below.

$$\frac{Q_{21} + Q'_{21} - Q_{12}}{Q_{20} + Q_{21} + Q'_{21} - Q_{12}} = 0.24 \quad (4.3)$$

$$\therefore \frac{R_{21} + R'_{21} - R_{12}}{Q} = 0.4105 \quad (4.4)$$

Next, using the reported results from the same authors[41] FIXME, we know that 959  
the number of CH molecules following the  $B^2\Sigma^- \rightarrow A^2\Delta$  (0,1) transition is four times 960  
as much as the number following the  $B^2\Sigma^- \rightarrow A^2\Delta$  (0,0) transition. 961

$$\frac{Q_{21} - Q_{12}}{Q'_{21}} = 4 \quad (4.5)$$

Finally, Garland et al.[40] FIXME reported that the rate of the forward transfer 962  
along the  $B^2\Sigma^- \rightarrow A^2\Delta$  (0,1) transition is about 60% faster than the reverse process. 963

$$\frac{Q_{21}}{Q_{12}} = 1.6 \quad (4.6)$$

This gives us the third equation forming a closed, linear set of equations in terms 964  
of  $Q_{21}$ ,  $Q_{12}$  and  $Q'_{21}$  that can be written out in matrix form and solved. Equation 4.7 965  
presents the solution. 966

$$\begin{bmatrix} R_{21} \\ R'_{21} \\ R_{12} \end{bmatrix} = \begin{bmatrix} 5.1966 \\ 0.4872 \\ 3.2479 \end{bmatrix} Q \quad (4.7)$$

Substituting Equations 4.1, 4.2 and 4.7 into Equations 2.29–2.30 leads to sim- 967  
plified expressions for the two fluorescence yields. More importantly, they are now 968  
functionally dependent on only the Einstein coefficients and the rate of collisional 969  
quenching. 970

Table 4.3: *FIXME*The coefficients of absorption for selected transitions in the  $CH X(v = 0)$  system are provided.

$N''$	$J_1''$	$\nu_1$ $\text{cm}^{-1}$	$B \times 10^{-9}$ $\text{m}^2 \text{J}^{-1} \text{s}^{-1}$	$J_2''$	$\nu_2$ $\text{cm}^{-1}$	$B \times 10^{-9}$ $\text{m}^2 \text{J}^{-1} \text{s}^{-1}$
1	0.5	25756.08	6.511	1.5	25774.03	5.823
2	1.5	25776.42	7.225	2.5	25782.72	6.489
3	2.5	25792.74	7.532	3.5	25797.06	7.174
4	3.5	25805.42	7.671	4.5	25808.75	7.460
5	4.5	25814.47	7.719	5.5	25817.20	7.581
6	5.5	25819.80	7.708	6.5	25822.13	7.610
7	6.5	25821.28	7.652	7.5	25823.32	7.581
8	7.5	25818.72	7.561	8.5	25820.55	7.506
9	8.5	25811.93	7.439	9.5	25813.59	7.396
10	9.5	25800.64	7.288	10.5	25802.17	7.254
11	10.5	25784.57	7.111	11.5	25785.98	7.083
12	11.5	25763.38	6.907	12.5	25764.70	6.884
13	12.5	25736.65	6.676	13.5	25737.88	6.657
14	13.5	25703.90	6.418	14.5	25705.06	6.402
15	14.5	25664.54	6.129	15.5	25665.64	6.116
16	15.5	25617.87	5.815	16.5	25618.92	5.804
17	16.5	25563.03	5.472	17.5	25564.03	5.463
18	17.5	25499.00	5.101	18.5	25499.95	5.094
19	18.5	25424.52	4.624	19.5	25425.42	4.618
20	19.5	25338.08	4.161	20.5	25338.93	4.156
21	20.5	25237.84	3.674	21.5	25238.64	3.670
22	21.5	25121.60	3.183	22.5	25122.36	3.180

$$Y_1 = \frac{5.1966Q}{(A_{10} + 4.2479Q)(A_{20} + 6.9838Q) - 16.8780Q} \quad (4.8)$$

$$Y_1' = \frac{0.4872Q(A_{10} + 4.2479Q)}{(A_{10}' + Q)((A_{10} + 4.2479Q)(A_{20} + 6.9838Q) - 16.8780Q)} \quad (4.9)$$

The calculation of the quenching rate also requires us to know the number density 971  
of the major species in the flame zone. The profile of the local mole fractions of 972  
various species through a 1-D, freely propagating, laminar flame was obtained from 973  
CHEMKIN solutions using the Flame-Speed Calculator reactor model. Results are 974

presented in this chapter for laminar flames using a variety of reactant mixtures  
and inlet conditions. Additional results for strained laminar methane-air flames are  
calculated using the Opposed flow flame reactor model.

The CHEMKIN results provide mole fractions, which can be used to solve for the  
number density of each species using the following equation.

$$n_i = \frac{pN_A X_i}{RT} \quad (4.10)$$

In Equation 4.10,  $N_A$  is Avogadro's number,  $X_i$  is the mole fraction of species  $i$ ,  
 $R$  is the universal gas constant and  $p$ ,  $T$  are the local pressure and temperature in  
the flame.

Next, in order to calculate the absorption integral, we require the Einstein B-  
coefficients, along with the line positions of the transitions excited by the laser. These  
are taken from FIXME and tabulated in Table 4.3. Using these values, it is possible  
to calculate the optimal laser wavelength that results in the highest value of the  
absorption integral. The optimal laser wavelength is not a constant value and depends  
on the temperature and pressure at which the CH molecules are present. Using  
a typical value of 1800 K for the temperature in the flame zone, the variation of  
the optimal laser wavelength can be plotted against combustor pressure. As the  
combustor pressure increases, the absorption lines in the CH  $B^2\Sigma^- \leftarrow X^2\Pi$  (0,0)  
R-bandhead are increasingly broadened by collisional broadening. Absorption lines  
that are at slightly lower frequencies, but close to the bandhead can now begin to  
absorb the laser energy. This causes the optimal laser wavelength to move slightly  
towards smaller wavenumbers. Figure FIXME shows this variation.

During experiments, this shift contributes negligibly towards increasing the LIF  
signal and hence, the laser tuner can be left at the optimal location for atmospheric  
pressure cases.

Returning back to Equations 2.21 and 2.32, we need spectroscopic constants of

Table 4.4: *Spectroscopic constants for the CH X<sup>2</sup>Π level are presented.*

Constant	Value, cm <sup>-1</sup>
$\omega_e$	2860.7508
$\omega_e x_e$	64.4387
$\omega_e y_e$	0.36345
$\omega_e z_e$	$-1.5378 \times 10^{-2}$
$B_e$	14.459883
$\alpha_e$	0.536541
$D_e$	$1.47436 \times 10^{-3}$
$\beta_e$	$-2.530 \times 10^{-5}$

the X<sup>2</sup>Π,  $v = 0$  energy level in order to calculate the Boltzmann fractions,  $f_j$ . These constants have been determined by Zachwieja et al.[43] and are tabulated in Table 4.4.

This formulation of the signal intensity implicitly makes the following assumptions.

1. The fluorescence emission is predicted at steady state.
2. The collection volume is optically thin and an emitted photon is not reabsorbed within the flame itself. This is a reasonable assumption to make, since the flame thickness and the thickness of the laser sheet are both typically quite small.

### 4.3 Results

Comparison of CH concentration predicted by GRI Mech and San Diego mechanisms for methane.



## CHAPTER 5

1011

### LSB FLAME CHARACTERISTICS

1012

In Chapter 2, we introduced the salient features of the Low Swirl Burner (LSB) flow field and discussed the mechanisms by which the LSB flame is stabilized. Further, various characteristics of the LSB flame that can be measured from flame images were outlined. To recapitulate, these are the flame location, flame shape and the flame structure. The first two are quantified by the flame standoff distance,  $X_f$ , and the flame angle,  $\theta_f$ , respectively.

1013  
1014  
1015  
1016  
1017  
1018

In the same chapter, we introduced the four flow parameters that describe an operating condition for the LSB — the combustor pressure,  $p$ , the preheat temperature,  $T$ , the mass-averaged inlet velocity (also called the reference velocity,  $U_0$ ), and the equivalence ratio of the premixed reactants,  $\phi$ . We further introduced a geometric parameter — the angle of the vanes of the swirler,  $\alpha$ , which affects the amount of swirl present in the flow field.

1019

1020

1021

1022

1023

1024

The LSB flame was studied over a range of operating conditions, and the effect of flow and geometric parameters on the reacting flow field were investigated. The results of these investigations are presented in this chapter.

1025

1026

1027

#### 5.1 Effect of Reference Velocity

1028

In typical gas turbine applications, varying the loading on the engine does not affect the reference velocity. However, since the reference velocity is a design parameter, the effect it has on the flame characteristics has implications for the design of future LSB-based gas turbine engines.

1029

1030

1031

1032

One of the key objectives of this thesis is to investigate how the LSB flame stabi-

1033

lization operates at high pressure conditions. The simple model described in Chapter 2 predicts a self-similar flow field for the LSB at all reference velocities. This implies that the reference velocity will have no discernible impact on the flame standoff distance. This result is desirable for gas turbine designers, since the flame location and shape can be assumed to be constant. Limited testing conducted in published works confirmed this behavior at atmospheric pressure conditions with no preheat.

In order to verify the validity of this model at high pressure conditions in the presence of substantial preheat, the LSB was operated at a pressure of 6 atm over a range of reference velocities from 10 m/s to 40 m/s. For these tests, the  $S_{37^\circ}$  swirler was used. In a parallel series of tests, the  $S_{45^\circ}$  swirler was tested at a pressure of 3 atm at a reference velocities of 40 and 80 m/s. The location of the flame was measured from CH\* chemiluminescence images, and the results are presented in Figure FIXME.

There is essentially no systematic variation in the flame standoff distance or the flame angle for the low velocity,  $S_{37^\circ}$  tests. Based on the model, this can be interpreted as the increase in reference velocity producing a concomitant increase in the turbulent flame speed at the flame stabilization location, negating any change in the flame's location. In other words, the flow field appears to retain its self-similarity, even at elevated pressures and temperatures.

When the  $S_{45^\circ}$  swirler was tested at higher reference velocities, however, the flame location shifted downstream sharply. This indicates potential limitations to the simple flame stabilization model that may not predict the behavior of the LSB flame at elevated pressures and temperatures, particularly at high reference velocities.

A possible cause of this limitation can be explored by considering the effect of increased reference velocity on the turbulent combustion regime in which the LSB combustor operates. Previous studies have primarily operated the LSB in the flamelet regime where the modified Damköhler model predicts the behavior of the turbulent flame speed with reasonable fidelity. At elevated pressures, both the laminar flame

speed of the reactants,  $S_L$  and the flame thickness,  $\delta_f$  are diminished. This places the operating regime higher and more to the right on a Borghi diagram, as shown in Figure FIXME. While increasing the reference velocity did not affect the turbulent combustion regime at lower pressures in a flamelet combustion regime, at elevated pressures the flame may be transitioning into the thin reaction zone regime. This transition would cause a reduction in  $S_T/S_L$ , or at least a lesser increase, and the turbulent flame speed would no longer be expected to increase in step with  $U_0$  and the increased levels of turbulence. This would explain the the observed downstream shift of the high pressure LSB flame at high reference velocities.

## 5.2 Effect of Preheat Temperature

The preheat temperature of the reactants is a key flow parameter, especially for gas turbine combustors. In general, the rates of most chemical reactions in the flame zone are highly sensitive to the temperature of the reactants. For the LSB in particular, the temperature of the incoming flow directly affects its viscosity and consequently, the velocity field in the flame stabilization region. Thus, studying the effect of the preheat temperature on the LSB flame and flow field is important.

In order to explore this in greater detail, the velocity field of the combustor was mapped using Laser Doppler Velocimetry (LDV). The conditions were chosen to study the effect of increasing the preheat temperature on both reacting and non-reacting LSB flow fields. Further, the study includes both low and high reference velocity cases. The relevant flow parameters relating to these tests are presented in Table FIXME. All LDV tests were limited to atmospheric pressure conditions. Implementing the LDV technique at elevated pressures proved difficult due to beam steering issues, coupled with impractical turn-around times between the successive runs that would be required to obtain sufficient LDV data points for analysis.

The normalized centerline mean and rms axial velocity profiles for the three cases

are presented in Figure FIXME. The abscissa represents the distance from a point 1087  
called the virtual origin,  $X_0$ . The virtual origin is defined as the imaginary location 1088  
where the extrapolated linear axial velocity profile reaches the reference velocity in 1089  
magnitude. The extrapolation is indicated in Figure FIXME by a dashed line. 1090

As noted in Chapter 2, previous studies[34] reported that mean axial stretch 1091  
— the normalized slope of the linear decay of axial velocity — at the inlet of the 1092  
combustor was self-similar, regardless of the Reynolds number,  $Re$  of the operating 1093  
condition. Further, it was reported that the velocity decay was steeper for reacting 1094  
cases compared to non-reacting cases. 1095

The results presented in Figure FIXME however, show that even though Cases 1 1096  
and 2 have similar  $Re$ , their mean velocity profiles have very different slopes. Further, 1097  
the reacting and non-reacting cases (both at preheated conditions) have similarly 1098  
steep slopes. This indicates that the mean axial stretch in the near field of the LSB 1099  
flow field is a stronger function of the preheat temperature than  $Re$ . The presence 1100  
of preheat results in increased viscosity that enhances the momentum transport in 1101  
the radial direction. This causes the velocity decay to be steep for preheated cases, 1102  
compared to cases without preheat. 1103

Assuming that  $S_T$  is constant, these results suggest that at higher preheat tem- 1104  
peratures, the flame would stabilize closer to the dump plane because of the faster 1105  
velocity decay and reduced local flow velocities. In fact, a faster velocity decay would 1106  
produce greater  $u'$  values and increase  $S_T$ , further causing the flame location to shift 1107  
upstream. Furthermore, in view of the steep velocity profile, it may be anticipated 1108  
that any changes in the stabilization location caused by perturbations in the local 1109  
flow field (and hence, the local turbulent flame propagation velocity) are likely to be 1110  
of diminished magnitude in the presence of preheat. All of this leads to an intuitive 1111  
result — the LSB flame behaves more stably at high preheat conditions. 1112

### 5.3 Effect of Swirler Vane Angle

1113

As described in Chapter 3, the LSB swirlers tested for this study are designed to have 1114  
the same mass flow splits. The  $S_{45^\circ}$  swirler has a higher vane angle, resulting in greater 1115  
blockage to the flow passing through the annular section. In order to compensate for 1116  
this, the perforated plate covering the central section has slightly smaller holes. The 1117  
net effect retains the same mass flow split as in the  $S_{37^\circ}$  swirler. 1118

Chapter 2 describes how the swirler vane angle relates to the amount of swirl im- 1119  
parted to the incoming flow. According to Equation FIXME, a swirler with a higher 1120  
vane angle will produce greater swirl in the reactants. Previous work in swirl com- 1121  
bustion[16, 50] has pointed out that increased swirl shortens the flame by enhancing 1122  
the swirl-induced radial pressure gradients. The data acquired in the present investi- 1123  
gation is in agreement with this observation. Operated at identical inlet conditions, 1124  
the  $S_{45^\circ}$  swirler stabilizes a flame closer to the dump plane and with a larger flame 1125  
angle compared to the  $S_{37^\circ}$  swirler. 1126

This result highlights an interesting trade-off for the designers of LSB-based gas 1127  
turbine engines. The  $S_{45^\circ}$  flame is located further upstream and has a more concen- 1128  
trated region of heat release. This enhances the strength of the toroidal recirculation 1129  
zone near the dump plane, which may be powerful enough under certain conditions 1130  
(as we shall see in Section 5.4) to even cause the flame to attach itself to the lip of 1131  
the inlet. All of this means that the  $S_{45^\circ}$  flame is more stable and will resist pertur- 1132  
bations in the incoming flow better than the  $S_{37^\circ}$  flame. However, the presence of 1133  
a strong recirculation zone in the flow field of the  $S_{45^\circ}$  swirler will entrain more hot 1134  
products and retain them longer near the zone of heat release. This is a recipe for 1135  
the production of thermal  $\text{NO}_x$ . While no emission measurements were made as part 1136  
of this study, it may be reasonably anticipated that the  $\text{NO}_x$  performance of the  $S_{45^\circ}$  1137  
swirler will be degraded compared to the  $S_{37^\circ}$  swirler. The trade-off for gas turbine 1138

engine designers is thus between flame stability and emissions performance.

## 5.4 Effect of Equivalence Ratio

The LSB is primarily intended for fuel-lean operation in order to utilize its low  $\text{NO}_x$  emission performance. As a result, most of the testing was done as close as possible to a target  $\phi$  of 0.56. Limited testing was carried out at 12 atm for two off-target conditions: a slightly richer ( $\phi \approx 0.58$ ) and a slightly leaner ( $\phi \approx 0.53$ ) mixture, in order to explore the sensitivity of the LSB flame to limited changes in equivalence ratio. The  $S_{45^\circ}$  swirler was used for these tests. The corresponding averaged and Abel-deconvoluted flame images are presented in Figure FIXME.

Two characteristics of the flame are immediately obvious from these images. First, the zone of heat release, marked by the region from which  $\text{CH}^*$  chemiluminescence is observed, is increasingly compact at fuel-rich conditions. Virtually all other flame images acquired at a leaner condition show a long flame, with the heat release distributed over the entire visible area of the combustor. The compactness of the heat release zone indicates potentially poor  $\text{NO}_x$  performance at these conditions.

Second, the fuel-rich flame brush can be observed to wrap around and anchor itself on the dump plane. This is particularly observable in the Abel-deconvoluted image. The attached region is not as bright as the rest of the flame brush, indicating that the flame may be attaching itself intermittently. This intermittent behavior can be confirmed from the instantaneous images where it is visible on some of the acquired images, but not others. This behavior was alluded to in Section 5.3 as being the result of the enhanced toroidal recirculation zone produced by this swirler. Thus, the intermittent attachment of the flame to the inlet indicates the increased importance of the toroidal recirculation zone in stabilizing the flame.

It should be noted that the reliance on a toroidal recirculation zone to anchor the flame to the inlet is one of the primary flame stabilization mechanisms used by

traditional swirl combustors. Thus, LSB swirlers with high vane angles tend to behave  
like traditional swirl combustors at fuel-rich conditions.

## 5.5 Effect of Combustor Pressure

In many gas turbine engines, the combustor pressure varies directly with the loading  
of the engine. Like the preheat temperature, the combustor pressure affects the LSB  
flame both through the fluid mechanics of the flow and the kinetics of the chemical  
reactions in the flame. The effect of the combustor pressure on the fluid mechanics  
of the LSB flow field can be captured by its effect on the Reynolds number. As noted  
in Section 5.2, however, previous work indicated the Reynolds number may not be  
an important parameter for the LSB, particularly in the near field where the flame  
stabilization occurs. On the other hand, the effect of the combustor pressure on reac-  
tion rates in the flame is clearly important. Increasing the combustor pressure results  
in a lower laminar flame speed and reduced flame thickness for methane-air flames.  
According to the modified Damköhler model discussed earlier, the reduced laminar  
flame speed should have little or no effect on the flow field, since the contribution from  
 $S_L$  in Equation 5.1 is vanishingly small, even at the lowest reference velocities  
of our test conditions. However, as suggested by our discussion in Section 5.1, the  
validity of the simple model at elevated pressure conditions is questionable.

In order to resolve the uncertainties regarding how the LSB flame responds to  
combustor pressure, the flame was imaged over a range of operating conditions from  
3 to 12 atm. For these tests, the reference velocity and the equivalence ratio were  
held constant. However, the temperature of the reactants continues to increase with  
pressure. The reason for this was discussed in Chapter 3 and is attributable to the  
reduced heat losses in the connecting pipes at the high flow rates required to pressurize  
the LSB. The flame location and shape inferred from the flame images are presented  
in Figure 5.10.

At low to moderate pressures, the flame location is nearly invariant for  $S_{37^\circ}$ , but 1191  
moves upstream for the  $S_{45^\circ}$  cases. This behavior can be explained as follows. The 1192  
flame stabilization location for the  $S_{45^\circ}$  swirler is closer to the dump plane compared 1193  
to the  $S_{37^\circ}$  swirler. This should result in enhanced heat transfer to the dump plane 1194  
and consequently to the incoming reactants. This feedback is even more effective as 1195  
the temperature of the incoming reactants increases. This causes the upstream shift 1196  
of the  $S_{45^\circ}$  flame, while the  $S_{37^\circ}$  flame is less affected by these processes. 1197

At high pressures, however, both flames are observed to move downstream, despite 1198  
the increasing preheat temperatures. The apparent decrease in the turbulent flame 1199  
speed at these conditions is an unexpected result, and the modified Damköhler model 1200  
is insufficient in accounting for this observation. Figure FIXME also shows that the 1201  
flame angle for both cases decreases slightly with pressure. This suggests that the 1202  
turbulent flame speed was consistently decreasing with pressure. In light of this, 1203  
the nearly constant location of the  $S_{37^\circ}$  flame could be attributed to the effects of 1204  
increasing combustor pressure and preheat temperature nearly canceling each other 1205  
out at the lower pressures. 1206

## 5.6 Flame Structure 1207



**CHAPTER 6**  
**CONCLUSIONS**

1208

1209

## APPENDIX A

1210

### SEEDER DESIGN

1211

A new seeder was designed for use in high pressure implementations of diagnostic techniques like Laser Doppler Velocimetry (LDV), Particle Image Velocimetry (PIV), etc.

1212  
1213  
1214

The previous design, as shown in Figure A.1, was a fluidized bed seeding generator. Seeding particles in a cylindrical vessel are fluidized by an air-turbine vibrator. Air is introduced into the vessel in the form of two opposing jets directed tangentially to produce a small amount of swirl in the flow field. Particles are picked up by the air flow and the swirl aids in separating the heavy/coagulated clumps of seeding particles by centrifugal acceleration.

1215

1216

1217

1218

1219

1220

This design had several shortcomings. First, it is observed that the seeding density of the seeded flow generally decreases over time, even if the seeding particles have not been depleted. The seeding particles tend to coagulate over time, due to the buildup of moisture, static charge, etc. In such cases, the vibrator can no longer effectively fluidize the particles. Further, the tangential introduction of the air flow preferentially depletes particles near the walls of the container, leaving the center relatively undisturbed. The cumulative effect of these phenomena diminishes the effectiveness of the seeder.

1221

1222

1223

1224

1225

1226

1227

1228

Second, the fluidized bed requires a minimum amount of seeding particles to function effectively. This requires the seeder to be refilled even before all the seeding particles are consumed.

1229

1230

1231

Third, when designed for high pressure applications, the seeder will become quite heavy due to flanges and other fittings. Such a setup cannot be easily fluidized using a reasonable-sized air-turbine vibrator.

1232

1233

1234

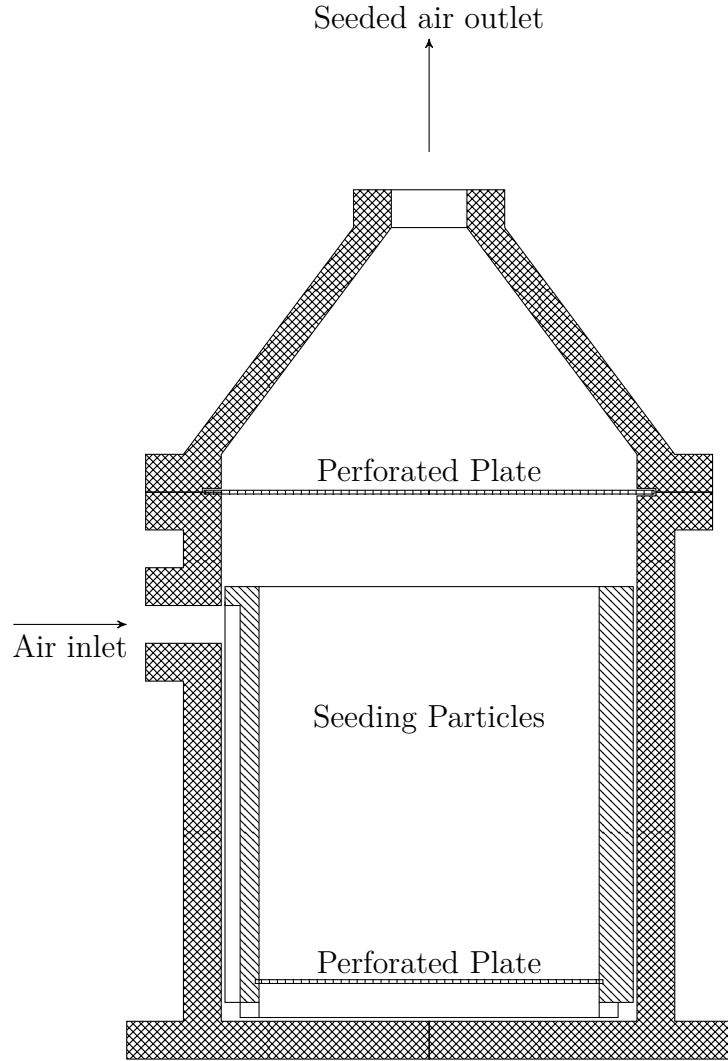


Figure A.1: A schematic of the old fluidized bed seeder is presented. The air enters the seeder through a groove along the inner vessel and is injected with a tangential velocity at the base of the seeder. The whole assembly is vibrated (vibrator not shown) to keep the particle bed fluidized. The seeded air flow exits through the outlet on the top.

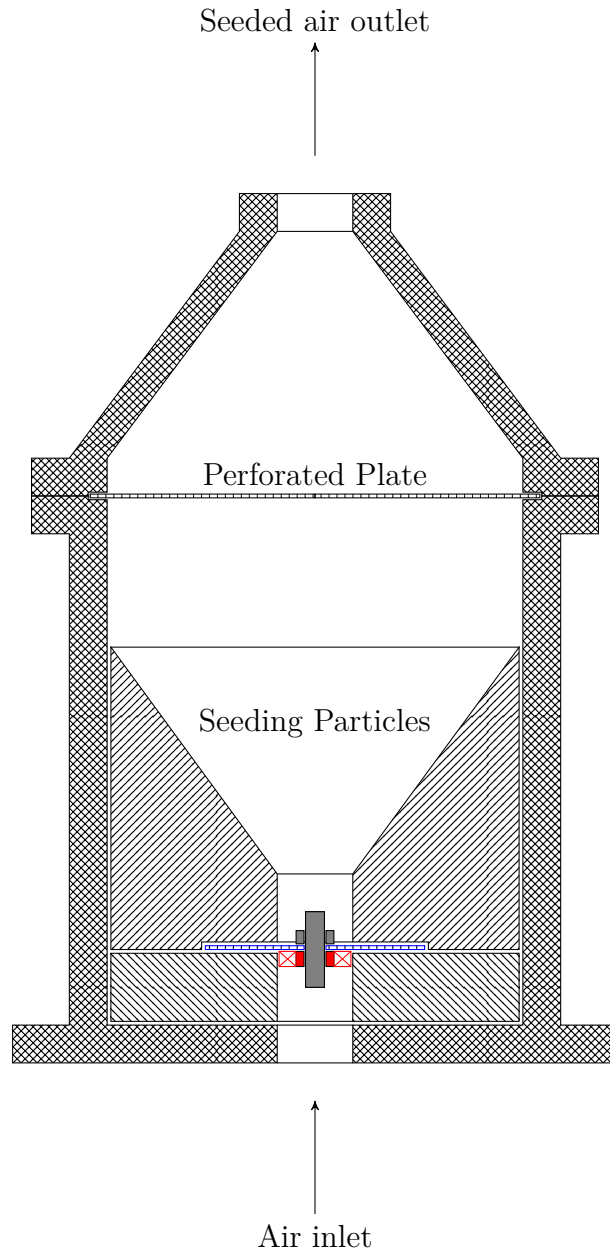


Figure A.2: *The improved design of the seeder is shown here in schematic form. The air enters the assembly from the inlet at the bottom, passes through the swirler (shown in red) and enters the seeder. The perforated plate at the bottom (shown in blue) keeps the seeding particles within the seeder. The swirler hub is threaded, allowing it to be secured to the perforated plate by a short steel bolt (shown in gray). After picking up the particles, a second perforated plate prevents large clumped seeding particles from passing through. The seeded air flow exits through the outlet at the top.*

The new seeder design is shown in Figure A.2, and resembles a funnel with a 1235  
swirler located halfway up the stem. A perforated base plate holds the swirler and 1236  
the seeding particles in the conical section of the swirler. Due to the steep angle of the 1237  
sides of the conical section, the seeding particles continuously collapse into the central 1238  
section. This negates any need for vibrating the system. Air is introduced from the 1239  
bottom of the seeder and enters the vessel by passing through the swirler. Since all 1240  
the air enters this way, there is a considerable amount of swirl in the resulting flow 1241  
field, Heavy/coagulated seeding particles are flung outward, while lighter particles are 1242  
carried with the air. After a sufficient distance to allow for the cyclonic separation 1243  
to be effective, the seeded air passes through another perforated plate which further 1244  
limits the presence of large clumps of particles. The exiting air is now spatially and 1245  
temporally uniformly seeded. 1246

## REFERENCES

1247

- [1] N. Syred and J. M. Beér, “Combustion in Swirling Flows: A Review,” *Combustion and Flame*, vol. 23, no. 2, pp. 143–201, 1974. 1248 1249
- [2] D. G. Lilley, “Swirl Flows in Combustion: A Review,” *AIAA Journal*, vol. 15, no. 8, pp. 1063–1078, 1977. 1250 1251
- [3] B. Bédard and R. K. Cheng, “Experimental Study of Premixed Flames in Intense Isotropic Turbulence,” *Combustion and Flame*, vol. 100, no. 3, pp. 485–494, 1995. 1252 1253
- [4] H. N. Najm, P. H. Paul, C. J. Mueller, and P. S. Wyckoff, “On the Adequacy of Certain Experimental Observables as Measurements of Flame Burning Rate,” *Combustion and Flame*, vol. 113, no. 3, pp. 312–332, 1998. 1254 1255 1256
- [5] R. S. Barlow, R. W. Dibble, J. Y. Chen, and R. P. Lucht, “Effect of Damköhler Number on Superequilibrium OH Concentration in Turbulent Nonpremixed Jet Flames,” *Combustion and Flame*, vol. 82, no. 3-4, pp. 235–251, 1990. 1257 1258 1259
- [6] C. F. Kaminski, J. Hult, and M. Aldén, “High repetition rate planar laser induced fluorescence of OH in a turbulent non-premixed flame,” *Applied Physics B: Lasers and Optics*, vol. 68, no. 4, pp. 757–760, 1999. 1260 1261 1262
- [7] J. Hult, U. Meier, W. Meier, A. Harvey, and C. F. Kaminski, “Experimental analysis of local flame extinction in a turbulent jet diffusion flame by high repetition 2-D laser techniques and multi-scalar measurements,” in *Proceedings of the Combustion Institute*, vol. 30, pp. 701–709, 2005. 1263 1264 1265 1266
- [8] H. Malm, G. Sparr, J. Hult, and C. F. Kaminski, “Nonlinear diffusion filtering of images obtained by planar laser-induced fluorescence spectroscopy,” *Journal* 1267 1268

- of *The Optical Society of America A: Optics, image science, and vision*, vol. 17, 1269  
no. 12, pp. 2148–2156, 2000. 1270
- [9] R. Abu-Gharbieh, G. Hamarneh, T. Gustavsson, and C. F. Kaminski, “Flame 1271  
front tracking by laser induced fluorescence spectroscopy and advanced image 1272  
analysis,” *Optics Express*, vol. 8, no. 5, pp. 278–287, 2001. 1273
- [10] C. M. Vagelopoulos and J. H. Frank, “An experimental and numerical study 1274  
on the adequacy of CH as a flame marker in premixed methane flames,” in 1275  
*Proceedings of the Combustion Institute*, vol. 30, pp. 241–249, 2005. 1276
- [11] M. Köhler, A. Brockhinke, M. Braun-Unkhoff, and K. Kohse-Höinghaus, “Quan- 1277  
titative Laser Diagnostic and Modeling Study of C<sub>2</sub> and CH Chemistry in Com- 1278  
bustion,” *The Journal of Physical Chemistry A*, vol. 114, no. 14, pp. 4719–4734, 1279  
2010. 1280
- [12] C. P. Fenimore, “Formation of nitric oxide in premixed hydrocarbon flames,” in 1281  
*Symposium (International) on Combustion*, vol. 13, pp. 373–380, 1971. 1282
- [13] J. Kiefer, Z. S. Li, J. Zetterberg, X. S. Bai, and M. Aldén, “Investigation of local 1283  
flame structures and statistics in partially premixed turbulent jet flames using 1284  
simultaneous single-shot CH and OH planar laser-induced fluorescence imaging,” 1285  
*Combustion and Flame*, vol. 154, no. 4, pp. 802–818, 2008. 1286
- [14] P. H. Paul and H. N. Najm, “Planar laser-induced fluorescence imaging of flame 1287  
heat release rate,” in *Symposium (International) on Combustion*, vol. 27, pp. 43– 1288  
50, 1998. 1289
- [15] J. Kiefer, Z. S. Li, T. Seeger, A. Leipertz, and M. Aldén, “Planar laser-induced 1290  
fluorescence of HCO for instantaneous flame front imaging in hydrocarbon 1291  
flames,” in *Proceedings of the Combustion Institute*, vol. 32, pp. 921–928, 2009. 1292

- [16] C. K. Chan, K. S. Lau, W. K. Chin, and R. K. Cheng, “Freely propagating open  
premixed turbulent flames stabilized by swirl,” in *Symposium (International) on  
Combustion*, vol. 24, pp. 511–518, 1992.
- [17] R. K. Cheng, “Velocity and Scalar Characteristics of Premixed Turbulent Flames  
Stabilized by Weak Swirl,” *Combustion and Flame*, vol. 101, no. 1-2, pp. 1–14,  
1995.
- [18] T. Plessing, C. Kortschik, N. Peters, M. S. Mansour, and R. K. Cheng, “Measure-  
ments of the turbulent burning velocity and the structure of premixed flames on  
a low-swirl burner,” in *Proceedings of the Combustion Institute*, vol. 28, pp. 359–  
366, 2000.
- [19] I. G. Shepherd and R. K. Cheng, “The Burning Rate of Premixed Flames in  
Moderate and Intense Turbulence,” *Combustion and Flame*, vol. 127, no. 3,  
pp. 2066–2075, 2001.
- [20] R. K. Cheng, I. G. Shepherd, B. Bédard, and L. Talbot, “Premixed turbulent flame  
structures in moderate and intense isotropic turbulence,” *Combustion Science  
and Technology*, vol. 174, no. 1, pp. 29–59, 2002.
- [21] I. G. Shepherd, R. K. Cheng, T. Plessing, C. Kortschik, and N. Peters, “Premixed  
flame front structure in intense turbulence,” in *Proceedings of the Combustion  
Institute*, vol. 29, pp. 1833–1840, 2002.
- [22] C. Kortschik, T. Plessing, and N. Peters, “Laser optical investigation of turbu-  
lent transport of temperature ahead of the preheat zone in a premixed flame,”  
*Combustion and Flame*, vol. 136, no. 1-2, pp. 43–50, 2004.
- [23] L. P. H. de Goey, T. Plessing, R. T. E. Hermanns, and N. Peters, “Analysis of  
the flame thickness of turbulent flamelets in the thin reaction zones regime,” in  
*Proceedings of the Combustion Institute*, vol. 30, pp. 859–866, 2005.



- [24] J. B. Bell, R. K. Cheng, M. S. Day, and I. G. Shepherd, “Numerical simulation  
of Lewis number effects on lean premixed turbulent flames,” in *Proceedings of  
the Combustion Institute*, vol. 31, pp. 1309–1317, 2007.
- [25] D. T. Yegian and R. K. Cheng, “Development of a lean premixed low-swirl  
burner for low NO<sub>x</sub> practical applications,” *Combustion Science and Technology*,  
vol. 139, no. 1, pp. 207–227, 1998.
- [26] R. K. Cheng, D. T. Yegian, M. M. Miyasato, G. S. Samuelsen, C. E. Benson,  
R. Pellizzari, and P. Loftus, “Scaling and development of low-swirl burners for  
low-emission furnaces and boilers,” in *Proceedings of the Combustion Institute*,  
vol. 28, pp. 1305–1313, 2000.
- [27] D. Littlejohn, A. J. Majeski, S. Tonse, C. Castaldini, and R. K. Cheng, “Labora-  
tory investigation of an ultralow NO<sub>x</sub> premixed combustion concept for industrial  
boilers,” in *Proceedings of the Combustion Institute*, vol. 29, pp. 1115–1121, 2002.
- [28] M. R. Johnson, D. Littlejohn, W. A. Nazeer, K. O. Smith, and R. K. Cheng,  
“A comparison of the flowfields and emissions of high-swirl injectors and low-  
swirl injectors for lean premixed gas turbines,” in *Proceedings of the Combustion  
Institute*, vol. 30, pp. 2867–2874, 2005.
- [29] R. K. Cheng, D. Littlejohn, W. A. Nazeer, and K. O. Smith, “Laboratory studies  
of the flow field characteristics of low-swirl injectors for adaptation to fuel-flexible  
turbines,” in *Proceedings of ASME Turbo Expo GT2006-90878*, 2006.
- [30] P. Petersson, J. Olofsson, C. Brackman, H. Seyfried, J. Zetterberg, M. Richter,  
M. Aldén, M. A. Linne, R. K. Cheng, A. Nauert, D. Geyer, and A. Dreizler,  
“Simultaneous PIV/OH-PLIF, Rayleigh thermometry/OH-PLIF and stereo PIV  
measurements in a low-swirl flame,” *Applied Optics*, vol. 46, no. 19, pp. 3928–  
3936, 2007.

- [31] W. A. Nazeer, K. O. Smith, P. Sheppard, R. K. Cheng, and D. Littlejohn, “Full  
scale testing of a low swirl fuel injector concept for ultra-low  $\text{NO}_x$  gas turbine  
combustion systems,” in *Proceedings of ASME Turbo Expo GT2006-90150*, 2006.
- [32] R. K. Cheng and D. Littlejohn, “Laboratory Study of Premixed  $\text{H}_2$ -Air and  $\text{H}_2$ -  
 $\text{N}_2$ -Air Flames in a Low-Swirl Injector for Ultralow Emissions Gas Turbines,”  
*Journal of Engineering for Gas Turbines and Power*, vol. 130, p. 031503, 2008.
- [33] D. Littlejohn and R. K. Cheng, “Fuel effects on a low-swirl injector for lean  
premixed gas turbines,” in *Proceedings of the Combustion Institute*, vol. 31,  
pp. 3155–3162, 2007.
- [34] R. K. Cheng, D. Littlejohn, W. A. Nazeer, and K. O. Smith, “Laboratory Studies  
of the Flow Field Characteristics of Low-Swirl Injectors for Adaptation to Fuel-  
Flexible Turbines,” *Journal of Engineering for Gas Turbines and Power*, vol. 130,  
p. 021501, 2008.
- [35] R. K. Cheng, D. Littlejohn, P. A. Strakey, and T. Sidwell, “Laboratory investi-  
gations of a low-swirl injector with  $\text{H}_2$  and  $\text{CH}_4$  at gas turbine conditions,” in  
*Proceedings of the Combustion Institute*, vol. 32, pp. 3001–3009, 2009.
- [36] D. Littlejohn, R. K. Cheng, D. R. Noble, and T. Lieuwen, “Laboratory Investiga-  
tions of Low-Swirl Injectors Operating With Syngases,” *Journal of Engineering  
for Gas Turbines and Power*, vol. 132, p. 011502, 2010.
- [37] R. H. Barnes, C. E. Moeller, J. F. Kircher, and C. M. Verber, “Dye-Laser Excited  
CH Flame Fluorescence,” *Applied Optics*, vol. 12, no. 11, pp. 2531–2532, 1973.
- [38] Z. S. Li, J. Kiefer, J. Zetterberg, M. Linvin, A. Leipertz, X. S. Bai, and M. Aldén,  
“Development of improved PLIF CH detection using an Alexandrite laser for  
single-shot investigation of turbulent and lean flames,” in *Proceedings of the  
Combustion Institute*, vol. 31, pp. 727–735, 2007.

- [39] J. Luque and D. R. Crosley, “Electronic transition moment and rotational transition probabilities in CH. II.  $B^2\Sigma^- - X^2\Pi$  system,” *Journal of Chemical Physics*, vol. 104, no. 11, pp. 3907–3913, 1996.
- [40] N. L. Garland and D. R. Crosley, “Energy transfer processes in CH  $A^2\Delta$  and  $B^2\Sigma^-$  in an atmospheric pressure flame,” *Applied Optics*, vol. 24, no. 23, pp. 4229–4237, 1985.
- [41] J. Luque, R. J. H. Klein-Douwel, J. B. Jeffries, and D. R. Crosley, “Collisional processes near the CH  $B^2\Sigma^- v' = 0, 1$  predissociation limit in laser-induced fluorescence flame diagnostics,” *Applied Physics B: Lasers and Optics*, vol. 71, no. 1, pp. 85–94, 2000.
- [42] J. W. Daily, “Laser induced fluorescence spectroscopy in flames,” *Progress in Energy and Combustion Science*, vol. 23, no. 2, pp. 133–199, 1997.
- [43] M. Zachwieja, “New Investigations of the  $A^2\Delta - X^2\Pi$  Band System in the CH Radical and a New Reduction of the Vibration-Rotation Spectrum of CH from the ATMOS Spectra,” *Journal of Molecular Spectroscopy*, vol. 170, no. 2, pp. 285–309, 1995.
- [44] J. Luque and D. R. Crosley, “Electronic transition moment and rotational transition probabilities in CH. I.  $A^2\Delta - X^2\Pi$  system,” *Journal of Chemical Physics*, vol. 104, no. 6, pp. 2146–2155, 1996.
- [45] A. Marshall, P. Venkateswaran, D. Noble, J. Seitzman, and T. Lieuwen, “Development and characterization of a variable turbulence generation system,” *Experiments in Fluids*, vol. 51, no. 3, pp. 611–620, 2011.
- [46] A. Melling, “Tracer particles and seeding for particle image velocimetry,” *Measurement Science and Technology*, vol. 8, no. 1, pp. 1406–1416, 1997.

- [47] B. Hemmerling, “Beam steering effects in turbulent high-pressure flames,” in *Proceedings of SPIE*, vol. 3108, pp. 32–37, 1997. 1392 1393
- [48] C. J. Dasch, “One-dimensional tomography: a comparison of abel, onion-peeling, and filtered backprojection methods,” *Applied Optics*, vol. 31, no. 8, pp. 1146–1152, 1992. 1394 1395 1396
- [49] N. L. Garland and D. R. Crosley, “Relative transition probability measurements in the  $A - X$  and  $B - X$  systems of CH,” *Journal of Quantitative Spectroscopy and Radiative Transfer*, vol. 33, no. 6, pp. 591–595, 1985. 1397 1398 1399
- [50] S. H. Stårner and R. W. Bilger, “Joint measurements of velocity and scalars in turbulent diffusion flame with moderate swirl,” in *Symposium (International) on Combustion*, vol. 21, pp. 1569–1577, 1986. 1400 1401 1402