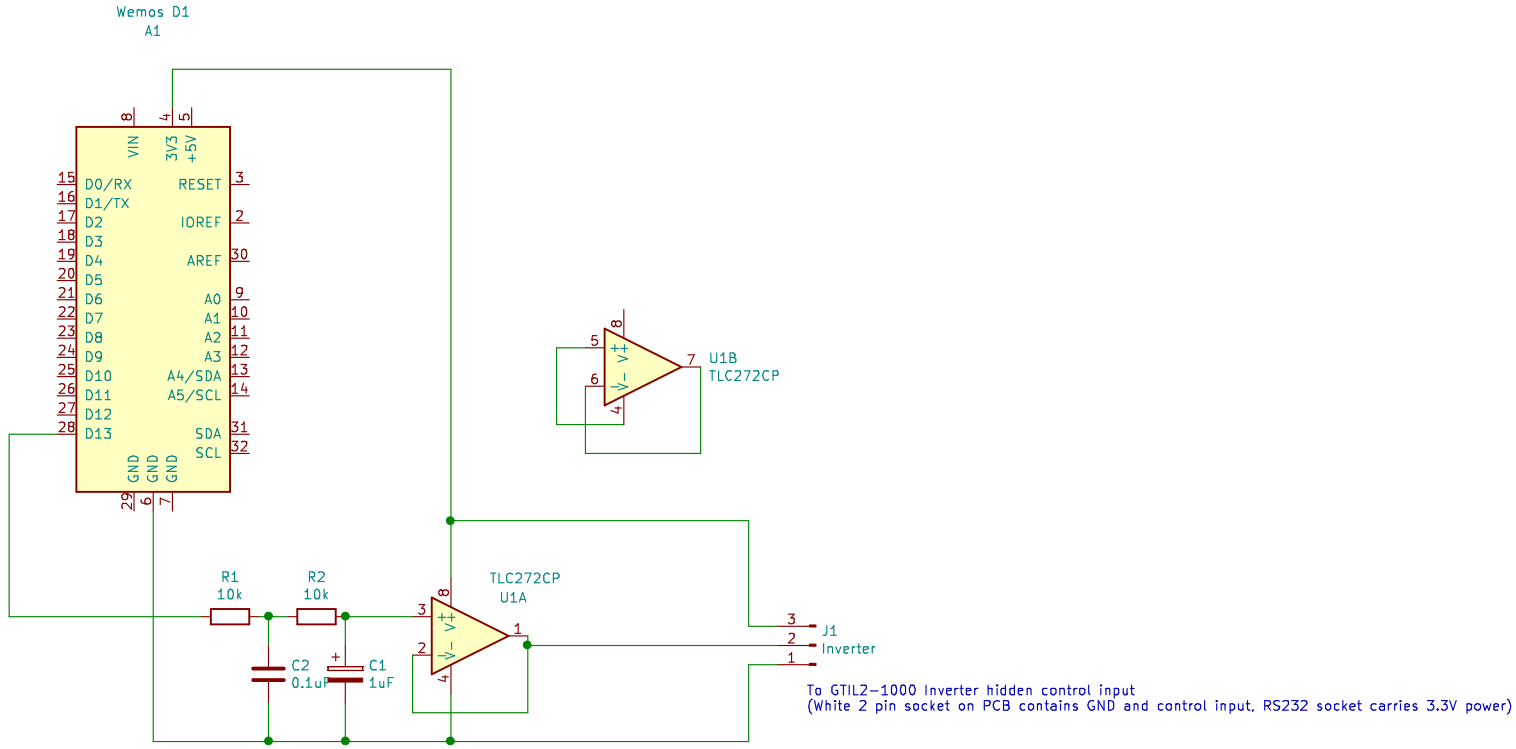

ESP8266 connects by WiFi to Node Red and receives commands to set a voltage on output pin using PWM.
GTIL2 inverter will modulate outputput power according to the voltage on the control pin.

Sheet: /
File: ESP8266-Inverter-shield.sch

Title: Wemos D1 ESP8266 Inverter Shield

Size: A4	Date: 2019-04-20	Rev:
KiCad E.D.A. kicad 5.0.1		Id: 1/1