Entropy-based viscous regularization for the multi-dimensional Euler equations in low-Mach and transonic flows

Marc O. Delchini[a], Jean C. Ragusa[*,a], Ray A. Berry[b]

[a]*Department of Nuclear Engineering, Texas A&M University, College Station, TX 77843, USA*
[b]*Idaho National Laboratory, Idaho Falls, ID 83415, USA*

Abstract

We present a new version of the entropy viscosity method, a viscous regularization technique for hyperbolic conservation laws, that is well-suited to low-Mach flows. By means of a low-Mach asymptotic study, new expressions for the entropy viscosity coefficients are derived. These definitions are valid for a wide range of Mach numbers, from subsonic flows (with very low Mach numbers) to supersonic flows, and no longer depend on an analytical expression for the entropy function. In addition, the entropy viscosity method is extended to Euler equations with variable area for nozzle flow problems. The effectiveness of the method is demonstrated using various 1-D and 2-D benchmark tests: flow in a converging-diverging nozzle; Leblanc shock tube; slow moving shock; strong shock for liquid phase; low-Mach flows around a cylinder and over a circular hump; and supersonic flow in a compression corner. Convergence studies are performed for both smooth solutions and solutions with shocks present.

Key words: entropy viscosity method, artificial viscosity, low-Mach regime, shock capturing, Euler equations with variable area.

[*]Corresponding author
 Email addresses: `delchmo@tamu.edu` (Marc O. Delchini), `jean.ragusa@tamu.edu` (Jean C. Ragusa), `ray.berry@inl.gov` (Ray A. Berry)

1. Introduction

Solving accurately compressible fluid equations in the low-Mach limit is an ongoing topic of research. In many engineering applications, compressibility effects require the solution of the compressible fluid equations in nearly incompressible regimes and/or for low-Mach flow problems. For example, such flows are encountered in aerodynamics in the study of airships. In the nuclear industry, flows are nearly in the incompressible regime but compressible effects cannot be neglected because of the intense heat source, and because of some postulated accident scenarios, and thus need to be accurately resolved. Hence, there is a strong interest to develop computational methods that can solve both compressible and incompressible flow problems.

When solving Euler equations for a wide range of Mach numbers, multiple questions must be addressed: stability, accuracy and solution convergence in the low-Mach regime. Because of the hyperbolic nature of the equations, shocks can form during transonic and supersonic flows and require the use of adequate numerical techniques to stabilize solution and correctly resolve the discontinuities. A wide range of stabilization methods are available in the literature: approximate Riemann solvers [1], flux-limiter techniques [2, 3], pressure-based viscosity methods [4], Lapidus method [5, 6, 7], and the entropy-viscosity method [8, 9], among others. These numerical methods are usually developed using simple equations of state and tested for transonic and supersonic flows where the disparity between the acoustic wave speed and the fluid speed is not excessively large and thus the Mach number is of order one. This approach, however, leads to a well-known accuracy problem in the low-Mach regime where the fluid velocity is smaller that the speed of sound by multiple orders of magnitude. The numerical dissipative terms become ill-scaled in the low-Mach regime and lead to the wrong numerical solution by changing the nature of the equations

2

solved. This behavior is well documented in the literature [10, 11, 12]. In [10], a low-Mach asymptotic study has demonstrated convergence of the compressible Euler equations to the incompressible ones. Many well-known stabilization techniques, for instance, the Roe scheme and the SUPG technique, do not yield the correct solution in the low-Mach regime and suitable modifications have been proposed (see [13] for the Roe scheme and [12] for the SUPG method) to ensure the convergence to the correct solution while preserving the original shock stabilization properties of these schemes. Additionally, the time step size may be severely restricted when solving compressible fluid equations with an explicit time discretization because of the large disparity between the fluid velocity and the speed of sound. To avoid an excessive number of explicit time steps, time preconditioners have been proposed and proved efficient [11]; however, because they modify the time derivatives in the governing equations, such acceleration techniques can only be used to obtain steady-state solutions for low-Mach flows using explicit schemes. To avoid modifying the time derivatives, the temporal implicit capabilities of the MOOSE multiphysics framework [14] are used. With such a choice, low-Mach steady-state solutions can be obtained effectively while preserving the accuracy of the transient solution; however, it requires the use of nonlinear solvers.

In this paper, we employ the entropy viscosity method as a numerical stabilization for the inviscid Euler equation and assess its performance in the low-Mach regime. The entropy viscosity method is a viscous regularization technique introduced by Guermond et al. to solve hyperbolic systems of equations and has successfully been applied to multi-dimensional supersonic flows with various spatial discretization schemes [15]. It is fairly straightforward to implement, can be used with unstructured grids, and has dissipative terms that are consistent with the entropy minimum principle. However, it has not been evaluated in the

3

low-Mach regime.

This paper is organized as follows: in Section 2 the current definition of the entropy viscosity method is recalled and its ill-scaled nature in the low-Mach regime is discussed. In Section 3, a new formulation of the viscosity residual is derived. This formulation no longer requires an analytical expression for the entropy function. A low-Mach asymptotic study is carried out to adapt the definition of the entropy viscosity coefficients in the incompressible limit while ensuring that the viscosity coefficients scale appropriately for all flow speeds (from low-Mach to supersonic). In Section 4, we extend the entropy viscosity method to Euler equations with variable area in order to model nozzle flows: the viscous dissipative terms are adapted so that the entropy minimum principle remains satisfied. Spatial and temporal discretizations and solution tehcniques are presented in Section 5. 1-D and 2-D numerical results are provided in Section 6 for a wide range of Mach numbers: liquid and gas nozzle flow problems, low-Mach flows over a cylinder and a circular bump (with Mach numbers as low as 10^{-7}), and supersonic flows in a compression corner [16]. Convergence studies are performed in 1-D in order to demonstrate the accuracy of the solution technique.

2. The Entropy Viscosity Method

2.1. Background

Euler equations in conservative form are given by

$$\partial_t \rho + \vec{\nabla}\cdot(\rho\vec{u}) = 0 \tag{1a}$$

$$\partial_t\left(\rho\vec{u}\right) + \vec{\nabla}\cdot(\rho\vec{u}\otimes\vec{u} + P\mathbb{I}) = 0 \tag{1b}$$

$$\partial_t\left(\rho E\right) + \vec{\nabla}\cdot[\vec{u}\left(\rho E + P\right)] = 0 \tag{1c}$$

4

78   where ρ, $\rho\vec{u}$ and E are the density, the momentum and the total specific energy,

79   respectively, and will be referred to as the conservative variables. $\vec{u}$ is the fluid

80   velocity and its specific internal energy is denoted by $e = E - \frac{u^2}{2}$. An equation

81   of state, dependent upon ρ and e, is used to compute the pressure P. The tensor

82   product $\vec{a} \otimes \vec{b}$ is such that $(\vec{a} \otimes \vec{b})_{i,j} = a_i b_j$. The identity tensor is denoted by $\mathbb{I}$.

83   Next, the entropy viscosity method [8, 9, 17, 18] applied to Eq. (1) is recalled.

84   The method consists of adding dissipative terms with a viscosity coefficient mod-

85   ulated by the entropy production; this allows for a high-order accuracy when

86   the solution is smooth (provided that the spatial and temporal discretizations

87   also are high order). The derivation of the viscous regularization (or dissipa-

88   tive terms) is carried out to be consistent with the entropy minimum principle;

89   details and proofs of the derivation can be found in [15]. The viscous regular-

90   ization thus obtained is valid for any equation of state as long as the physical

91   entropy function s is concave (or $-s$ is a convex function) with respect to the

92   internal energy e and the specific volume $1/\rho$. The Euler equations with viscous

93   regularization become

$$\partial_t \rho + \vec{\nabla} \cdot (\rho \vec{u}) = \vec{\nabla} \cdot \left(\kappa \vec{\nabla} \rho \right) \tag{2a}$$

94

$$\partial_t (\rho \vec{u}) + \vec{\nabla} \cdot (\rho \vec{u} \otimes \vec{u} + P\mathbb{I}) = \vec{\nabla} \cdot \left(\mu \rho \vec{\nabla}^s \vec{u} + \kappa \vec{u} \otimes \vec{\nabla} \rho \right) \tag{2b}$$

95

$$\partial_t (\rho E) + \vec{\nabla} \cdot [\vec{u} (\rho E + P)] = \vec{\nabla} \cdot \left(\kappa \vec{\nabla} (\rho e) + \frac{1}{2} ||\vec{u}||^2 \kappa \vec{\nabla} \rho + \rho \mu \vec{u} \vec{\nabla} \vec{u} \right) \tag{2c}$$

96   where κ and μ are positive viscosity coefficients (in units of length^2/time). $\vec{\nabla}^s \vec{u}$

97   denotes the symmetric gradient operator and guarantees the method to be ro-

98   tationally invariant [15]. The viscosity coefficients are key ingredients in the

99   viscous regularization of Eq. (2). Other stabilization approaches have been pro-

100   posed in the literature, for instance, the Lapidus method [7, 5] or pressure-based

101   viscosity methods [4]. Here, we follow the work of Guermond et al. and define

the viscosity coefficients, κ and μ, based on the local entropy production. These coefficients are numerically evaluated using the local entropy residual $R_{\text{ent}}(\vec{r},t)$ defined in Eq. (3); $R_{\text{ent}}(\vec{r},t)$ is known to be peaked in shocks and vanishingly small elsewhere [1].

$$R_{\text{ent}}(\vec{r},t) := \partial_t s + \vec{u} \cdot \vec{\nabla} s \tag{3}$$

In the current version of the method, the ratio of κ to μ is defined through a numerical Prandlt number, $\text{Pr} = \kappa/\mu$. Pr is a user-defined parameter and is usually taken in the range $[0.001; 1]$. Since the entropy residual $R_{\text{ent}}(\vec{r},t)$ may be extremely large in shocks, the definition of the viscosity coefficients also includes a first-order viscosity coefficient that serves as an upper bound for the entropy-based viscosity coefficients. The first-order viscosity coefficients, denoted by $\mu_{\max}$ and $\kappa_{\max}$, are chosen so that the numerical scheme becomes equivalent to an upwind scheme when the first-order coefficients are employed. The upwind scheme is known to be over-dissipative but guarantees monotonicity [1]. In practice, the viscosity coefficients only saturate to the first-order viscosity coefficients in shocks and are much smaller elsewhere, hence avoiding the over-dissipation of the upwind method. The first-order viscosity coefficients $\mu_{\max}$ and $\kappa_{\max}$ are equal and set proportional to the largest local eigenvalue $||\vec{u}|| + c$:

$$\mu_{\max}(\vec{r},t) = \kappa_{\max}(\vec{r},t) = \frac{h}{2} \left(||\vec{u}(t,\vec{r})|| + c(t,\vec{r}) \right), \tag{4}$$

where h denotes the local grid size (for higher than linear finite element representations, h is defined as the ratio of the grid size to the polynomial order of the test functions used, see Eq. 2.4 in [18]). For simplicity, the first-order viscosity coefficients will only be referred to as $\kappa_{\max}(\vec{r},t)$. In practice, these

6

123 quantities are evaluated within a given cell K at quadrature points:

$$\kappa_{\max}^K(\vec{r}_q, t) = \frac{h_K}{2} \left(||\vec{u}(t, \vec{r}_q)|| + c(t, \vec{r}_q) \right), \tag{5}$$

124 where $\vec{r}_q$ denotes the position of a quadrature point. As stated earlier, the
125 entropy viscosity coefficients, which we denote by κ_e and μ_e, are set proportional
126 to the entropy production evaluated by computing the local entropy residual
127 R_{ent}. The definitions also include the inter-element jump $J[s]$ of the entropy flux,
128 allowing for the detection of discontinuities other than shocks (e.g., contact).
129 κ_e and μ_e are computed as follows

$$\mu_e^K(\vec{r}_q, t) = h_K^2 \frac{\max\left(|R_{\mathrm{ent}}^K(\vec{r}_q, t)|, J^K[s](t) \right)}{||s - \bar{s}||_\infty} \tag{6a}$$

130

$$\kappa_e^K(\vec{r}_q, t) = \Pr \mu_e^K(\vec{r}_q, t), \tag{6b}$$

131 where $|| \cdot ||_\infty$ and $\bar{\cdot}$ denote the L_∞-norm and the average operator over the
132 entire computational domain, respectively. The definition of the entropy jump
133 $J[s]$ is spatial discretization-dependent and examples of definitions can be found
134 in [18] for discontinuous Galerkin discretization. For continuous finite element
135 methods (FEM), the jump of a given quantity is defined as the change of its
136 normal derivative $(\partial_n(\cdot) = \vec{n} \cdot \vec{\nabla}(\cdot))$ across the common face separating the two
137 elements, and will be further referred to as the inter-element jump. We take the
138 largest value over all faces f present on the boundary ∂K of element K:

$$J^K[s](t) = \max_{f \in \partial K} \max_{\vec{r}_q \in f} \left(||\vec{u}(\vec{r}_q, t)|| [\![\vec{\nabla} s(\vec{r}_q, t) \cdot \vec{n}(\vec{r}_q)]\!]_f \right), \tag{7}$$

139 where $[\![a(\vec{r}_q)]\!]_f$ denotes the inter-element jump in $a(\vec{r})$ at quadrature point $\vec{r}_q$
140 on face f (the quadrature points $\vec{r}_q$ are taken on the faces f of the element
141 K). With the definition given in Eq. (7), the jump is constant over each el-

142 ement K of the computational domain. The denominator $||s - \bar{s}||_\infty$ is used

143 for dimensionality purposes. Currently, there are no theoretical justifications

144 for choosing the denominator beyond a dimensionality argument. Finally, the

145 viscosity coefficients μ and κ are as follows:

$$\mu(\vec{r}, t) = \min\left(\mu_e(\vec{r}, t), \, \mu_{\max}(\vec{r}, t)\right) \tag{8a}$$

146 and

$$\kappa(\vec{r}, t) = \min\left(\kappa_e(\vec{r}, t), \, \kappa_{\max}(\vec{r}, t)\right). \tag{8b}$$

147 Given these definitions, we have the following properties. In shock regions, the

148 entropy viscosity coefficients will experience a peak because of entropy produc-

149 tion and thus will saturate to the first-order viscosity. The first-order coefficients

150 are known to be over-dissipative and will smooth out any oscillatory behavior.

151 Elsewhere in the domain, entropy production will be small and the viscosity

152 coefficients μ and κ will remain small. High-order accuracy for entropy-based

153 viscous stabilization has been demonstrated using several 1-D shock tube ex-

154 amples and various 2-D tests [8, 9, 18].

155 *2.2. Issues in the Low-Mach Regime*

156 In the low-Mach Regime, a smooth flow is known to approach the isentropic

157 limit, resulting in very little entropy production. Since the entropy viscosity

158 method is directly based on the evaluation of the local entropy production, it

159 is of interest to study how the entropy viscosity coefficients μ_e and κ_e scale

160 in the low-Mach regime. In practice, the entropy residual R_{ent} will be very

161 small in that regime and so will be the denominator $||s - \bar{s}||_\infty$, thus making

162 the definition of the viscosity coefficients in Eq. (6) undetermined and likely ill-

163 scaled. One possible approach would consist of expanding the numerator and

164 denominator in terms of the Mach number and deriving its limit when the Mach

165 number goes to zero. Such derivation may not be straightforward, especially

166 for general equations of state. However, this can be avoided by noting that the

167 entropy residual R_{ent} can be recast as a function of pressure, density, velocity,

168 and speed of sound as will be shown in Eq. (9) of Section 3.1. This alternate

169 entropy residual definition is the basis for the low-Mach analysis carried out in

170 this paper and possesses several advantages that are detailed next.

171 **3. An All-speed Reformulation of the Entropy Viscosity Method**

172   In this section, the entropy residual R_{ent} is recast as a function of pressure,

173 density, velocity and speed of sound. Then, a low-Mach asymptotic study is

174 carried out for the Euler equations with viscous regularization in order to derive

175 an appropriate normalization parameter that is valid in the isentropic low-Mach

176 regime as well as for transonic and supersonic flows.

177 *3.1. New Definition of the Entropy Production Residual*

178   The first step in defining viscosity coefficients that behave well in the low-

179 Mach limit is to recast the entropy residual in terms of thermodynamic variables.

180 This provides physical insight on possible normalization choices that can be valid

181 in both low-Mach and transonic flows. The alternate definition of the entropy

182 residual, the derivation of which is given in Appendix A, is the following:

$$
R_{\mathrm{ent}}(\vec{r},t) := \partial_t s + \vec{u} \cdot \vec{\nabla} s = \frac{\mathrm{D}s}{\mathrm{D}t} = \frac{s_e}{P_e} \left(\underbrace{\frac{\mathrm{D}P}{\mathrm{D}t} - c^2 \frac{\mathrm{D}\rho}{\mathrm{D}t}}_{\widetilde{R}_{\mathrm{ent}}(\vec{r},t)} \right), \tag{9}
$$

183 where $\frac{\mathrm{D}}{\mathrm{D}t}$ denotes the material derivative ($\frac{\mathrm{D}}{\mathrm{D}t} := \frac{\partial}{\partial t} + \vec{u} \cdot \vec{\nabla}$), and x_y is the

184 standard shorthand notation for the partial derivative of x with respect to y,

185 e.g., $P_e := \frac{\partial P}{\partial e}$. For instance, when employing the ideal gas equation of state, the

186 proportionality coefficient $\frac{s_e}{P_e}$ simply is $\frac{s_e}{P_e} = \frac{C_v(\gamma - 1)}{P}$. Note that the definition

of the speed of sound, $c^2 = \left.\frac{\partial P}{\partial \rho}\right|_s$, can be used to show that $\widetilde{R}_{\text{ent}}$ is zero in isentropic flow regions (see Appendix C). The entropy residuals R_{ent} and $\widetilde{R}_{\text{ent}}$ are proportional to one another and will experience similar variations in space and time. Thus, one may elect to employ $\widetilde{R}_{\text{ent}}$ instead of R_{ent} for the evaluation of the local entropy residual. The new expression presents several advantages which include:

- An analytical expression of the entropy function s is no longer needed: the residual $\widetilde{R}_{\text{ent}}$ is evaluated using the local values of pressure, density, velocity and speed of sound. Deriving an entropy function for some complex equations of state may be difficult;

- Suitable normalizations for the residual $\widetilde{R}_{\text{ent}}$ can be devised. Examples include the pressure itself or combinations of the density, the speed of sound and the norm of the velocity, i.e., ρc^2, $\rho c ||\vec{u}||$ or $\rho ||\vec{u}||^2$.

Denoting the normalization of $\widetilde{R}_{\text{ent}}$ by norm_P, the entropy-based viscosity coefficients μ_e and κ_e can be re-defined as follows:

$$\mu_e^K(\vec{r}_q, t) = h_K^2 \frac{\max\left(|\widetilde{R}_{\text{ent}}^K(\vec{r}_q, t)|, J^K(t)\right)}{\text{norm}_P^\mu} \,, \tag{10a}$$

and

$$\kappa_e^K(\vec{r}_q, t) = h_K^2 \frac{\max\left(|\widetilde{R}_{\text{ent}}^K(\vec{r}_q, t)|, J^K(t)\right)}{\text{norm}_P^\kappa} \,, \tag{10b}$$

where

$$J^K(t) = \max_{f \in \partial K} \max_{\vec{r}_q \in f} ||\left(\vec{u}(\vec{r}_q, t)|| \max\left(J^K[P](t), c^2(\vec{r}_q, t)||J^K[\rho](t)\right)\right) \tag{10c}$$

Note that now the jump operator J^K acts on the variables appearing in $\widetilde{R}_{\text{ent}}$, namely, pressure and density. The residual $\widetilde{R}_{\text{ent}}$ and the pressure jump will

10

206 only contribute to the viscosity coefficients in the shock region. On the other

207 hand, the density jump will contribute in both contact and shock regions. The

208 μ and κ coefficients are kinematic viscosities (units of m^2/s); the normalization

209 parameters norm$_P$ are thus in units of pressure, hence the use of the subscript P.

210 Note also that we are not requiring the same normalization for both μ_e and κ_e

211 so the entropy viscosity coefficients can be different. The low-Mach asymptotic

212 study presented next will determine the proper normalization.

3.2. Asymptotic Study in the Low-Mach Regime

214 The Euler equations with viscous stabilization, Eq. (6), bear some simi-

215 larities with the Navier-Stokes equations in the sense that dissipative terms

216 (containing second-order spatial derivatives) are present in both sets of equa-

217 tions. An abundant literature exists regarding the low-Mach asymptotic of the

218 Navier-Stokes equations [10, 11, 12, 19]. The asymptotic study presented here

219 is inspired by the work of Muller et al. [19] where an asymptotic derivation for

220 the Navier-Stokes was presented. We remind the reader that the objective is to

221 determine appropriate scaling for the entropy viscosity coefficients so that the

222 dissipative terms remain well-scaled for two limit cases: (i) the isentropic low-

223 Mach limit where Euler equations degenerate to an incompressible system of

224 equations in the low-Mach limit and (ii) the non-isentropic limit with formation

225 of shocks. The isentropic limit of the Euler equations with viscous regular-

226 ization should yield incompressible fluid flow solutions in the low-Mach limit,

227 namely, that the spatial steady-state pressure variations are of the order M^2

228 and that the velocity satisfies the divergence constraint $\vec{\nabla} \cdot \vec{u}_0 = 0$ [10, 11, 12].

229 For non-isentropic situations, shocks may form for any value of Mach number

230 and the minimum entropy principle should still be satisfied so that numerical

231 oscillations, if any, be controlled by the entropy viscosity method independently

232 of the value of the Mach number. Our objective is to determine the appropriate

11

233 scaling for norm_P^κ and norm_P^μ in these two limit cases.

The first step in the study of the limit cases (i) and (ii) is to re-write Eq. (2) in a non-dimensional manner. To do so, the following variables are introduced:

$$\rho^* = \frac{\rho}{\rho_\infty}, \ u^* = \frac{u}{u_\infty}, \ P^* = \frac{P}{\rho_\infty c_\infty^2}, \ E^* = \frac{E}{c_\infty^2},$$

$$x^* = \frac{x}{L_\infty}, \ t^* = \frac{t}{L_\infty/u_\infty}, \ \mu^* = \frac{\mu}{\mu_\infty}, \ \kappa^* = \frac{\kappa}{\kappa_\infty}, \quad (11)$$

234 where the subscript ∞ denote the far-field or stagnation quantities and the
235 superscript $*$ stands for the non-dimensional variables. The far-field reference
236 quantities are chosen such that the dimensionless flow quantities are of order 1.
237 The reference Mach number is given by

$$M_\infty = \frac{u_\infty}{c_\infty}, \quad (12)$$

238 where c_∞ is a reference value for the speed of sound. Then, the scaled Euler
239 equations with viscous regularization are:

$$\partial_{t^*}\rho^* + \vec{\nabla}^* \cdot (\rho^* \vec{u}^*) = \frac{1}{\text{Pé}_\infty}\vec{\nabla}^* \cdot (\kappa^* \vec{\nabla}^* \rho^*) \quad (13a)$$

$$\partial_{t^*}(\rho^* \vec{u}^*) + \vec{\nabla}^* \cdot (\rho^* \vec{u}^* \otimes \vec{u}^*) + \frac{1}{M_\infty^2}\vec{\nabla}^* P^* = \frac{1}{\text{Re}_\infty}\vec{\nabla}^* \cdot \left(\rho^* \mu^* \vec{\nabla}^{s,*} \vec{u}^*\right)$$
$$+ \frac{1}{\text{Pé}_\infty}\vec{\nabla}^* \cdot \left(\vec{u}^* \otimes \kappa^* \vec{\nabla}^* \rho^*\right) \quad (13b)$$

$$\partial_{t^*}(\rho^* E^*) + \vec{\nabla}^* \cdot [\vec{u}^* (\rho^* E^* + P^*)] = \frac{1}{\text{Pé}_\infty}\vec{\nabla}^* \cdot \left(\kappa^* \vec{\nabla}^* (\rho^* e^*)\right)$$
$$+ \frac{M_\infty^2}{\text{Re}_\infty}\vec{\nabla}^* \cdot \left(\vec{u}^* \rho^* \mu^* \vec{\nabla}^{s,*} \vec{u}^*\right) + \frac{M_\infty^2}{2\text{Pé}_\infty}\vec{\nabla}^* \cdot \left(\kappa^* (u^*)^2 \vec{\nabla}^* \rho^*\right), \quad (13c)$$

12

where the numerical Reynolds (Re_∞) and Péclet (Pé_∞) numbers are defined as:

$$\text{Re}_\infty = \frac{u_\infty L_\infty}{\mu_\infty} \text{ and } \text{Pé}_\infty = \frac{u_\infty L_\infty}{\kappa_\infty}. \tag{14}$$

Note that the Prandlt number used in the original version of the entropy viscosity method is simply given by

$$\text{Pr}_\infty = \text{Pé}_\infty / \text{Re}_\infty. \tag{15}$$

The numerical Reynolds and Péclet numbers defined in Eq. (14) are related to the entropy viscosity coefficients μ_∞ and κ_∞. Thus, once a scaling (in powers of M_∞) is obtained for Re_∞ and Pé_∞, the corresponding normalization parameters norm_P^μ and norm_P^κ will automatically be set. For brevity, the superscripts * are omitted in the remainder of this section.

For simplicity, we use here the ideal gas equation of state; its non-dimensionalized expression is given by

$$P^* = (\gamma - 1)\,\rho^* \left(E^* - \frac{1}{2}M_\infty^2(u^*)^2 \right) = (\gamma - 1)\,\rho^* e^*. \tag{16}$$

In the low-Mach isentropic limit, shocks cannot form and the compressible Euler equations are known to converge to the incompressible equations when the Mach number tends to zero. When adding dissipative terms, as is the case with the entropy viscosity method, the main properties of the low-Mach asymptotic limit must be preserved. We begin by expanding each variable in powers of the Mach number. As an example, the expansion for the pressure is given by:

$$P(\vec{r}, t) = P_0(\vec{r}, t) + P_1(\vec{r}, t)M_\infty + P_2(\vec{r}, t)M_\infty^2 + \dots \tag{17}$$

By studying the resulting momentum equations for various powers of M_∞, it is

13

observed that the leading order and first-order pressure terms, P_0 and P_1, are spatially constant if and only if $\mathrm{Re}_\infty = \mathrm{P\acute{e}}_\infty = 1$. In this case, we have at order M_∞^{-2}:

$$\vec{\nabla} P_0 = 0 \tag{18a}$$

and at order M_∞^{-1}

$$\vec{\nabla} P_1 = 0 \,. \tag{18b}$$

Using the scaling $\mathrm{Re}_\infty = \mathrm{P\acute{e}}_\infty = 1$, the leading-order expressions for the continuity, momentum, and energy equations are:

$$\partial_t \rho_0 + \vec{\nabla}\cdot(\rho\vec{u})_0 = \vec{\nabla}\cdot(\kappa\vec{\nabla}\rho)_0 \tag{19a}$$

$$\partial_t(\rho\vec{u})_0 + \vec{\nabla}\cdot(\rho\vec{u}\otimes\vec{u})_0 + \vec{\nabla} P_2 = \vec{\nabla}\cdot(\rho\mu\vec{\nabla}^s\vec{u} + \kappa\vec{u}\otimes\vec{\nabla}\rho)_0 \tag{19b}$$

$$\partial_t(\rho E)_0 + \vec{\nabla}\cdot[\vec{u}(\rho E + P)]_0 = \vec{\nabla}\cdot(\kappa\vec{\nabla}(\rho e))_0 \tag{19c}$$

where the notation $(fg)_0$ means that we only keep the 0^{th}-order terms in the product fg. The leading-order of the equation of state is given by

$$P_0 = (\gamma - 1)(\rho E)_0 \,. \tag{20}$$

Using Eq. (20), the energy equation can be recast as a function of the leading-order pressure, P_0, as follows:

$$\partial_t P_0 + \gamma\vec{\nabla}\cdot(\vec{u}P)_0 = \vec{\nabla}\cdot(\kappa\vec{\nabla}(P))_0 \,. \tag{21}$$

From Eq. (18a), we infer that P_0 is spatially constant. Thus, Eq. (21) becomes

$$\frac{1}{\gamma P_0}\frac{dP_0}{dt} = -\vec{\nabla}\cdot\vec{u}_0 \tag{22}$$

14

and, at steady state, we have

$$\vec{\nabla} \cdot \vec{u}_0 = 0 \,. \tag{23}$$

That is, the leading-order of velocity is divergence-free. The same reasoning can be applied to the leading-order of the continuity equation (Eq. (19a)) to show that the material derivative of the density variable is zero:

$$\frac{\mathrm{D}\rho_0}{\mathrm{D}t} := \partial_t \rho_0 + \vec{u}_0 \cdot \vec{\nabla} \cdot \rho_0 = 0 \,. \tag{24}$$

Therefore, we conclude that by setting the Reynolds and Péclet numbers to one, the incompressible fluid results are retrieved in the low-Mach limit when employing the compressible Euler equations with viscous regularization terms present. In addition, the scaling of the Prandtl number can also be obtained using Eq. (15), hence clarifying the use of the numerical Prandtl in the original entropy viscosity method [8].

3.3. Scaling of Re_∞ and $P\acute{e}_\infty$ for non-isentropic flows

Next, we consider the non-isentropic case. Recall that even subsonic flows can present shocks (for instance, a step initial condition in the pressure will trigger shock formation, independently of the Mach number). The non-dimensional form of the Euler equations given in Eq. (13) provides some insight on the dominant terms as a function of the Mach number. This is particular obvious in the momentum equation, Eq. (13b), where the gradient of pressure is scaled by $1/M_\infty^2$. In the non-isentropic case, we no longer have $\frac{\vec{\nabla}P}{M_\infty^2} = \vec{\nabla}P_2$ and therefore the pressure gradient term may need to be stabilized by some dissipative terms of the same scaling so as to prevent spurious oscillations from forming. By inspecting the dissipative terms presents in the the momentum equation, having a dissipative term that scales as $1/M_\infty^2$ leads to the following three options: (a) $Re_\infty = M_\infty^2$ and $P\acute{e}_\infty = 1$, (b) $Re_\infty = 1$ and $P\acute{e}_\infty = M_\infty^2$, or (c)

15

$\text{Re}_\infty = \text{Pé}_\infty = M_\infty^2$. Any of these choices will also affect the stabilization of the continuity and energy equations. For instance, using a Péclet number equal to M_∞^2 may effectively stabilize the continuity equation in the shock region but this may also add an excessive amount of dissipation for subsonic flows at the location of the contact wave. Such a behavior may not be suitable for accuracy purpose, making options (b) and (c) inappropriate. The same reasoning, left to the reader, can be carried out for the energy equation (Eq. (13c)) and results in the same conclusion. The remaining choice, option (a), has the proper scaling: in this case, only the dissipation terms involving $\vec{\nabla}^{s,*}\vec{u}^*$ scale as $1/M_\infty^2$ since $\text{Re}_\infty = M_\infty^2$, leaving the regularization of the continuity equation unaffected because $\text{Pé}_\infty = 1$.

3.4. An All-speed normalization of the entropy residual

The study of the above limit cases yields two different possible scalings for the Reynolds number: $\text{Re}_\infty = 1$ in the low-Mach limit and $\text{Re}_\infty = M_\infty^2$ for non-isentropic flows, whereas the numerical Péclet number always scales as one. In order to have a stabilization method valid for a wide range of Mach numbers, from very low-Mach to supersonic flows, these two scalings should be combined in a unique definition.

We begin with the normalization parameter norm_P^κ. Using the definition of the viscosity coefficients given in Eq. (10) and the scaling of Eq. (11), it can be shown that:

$$\kappa_\infty = \frac{\rho_\infty c_\infty^2 u_\infty L}{\text{norm}_{P,\infty}^\kappa} \, , \tag{25}$$

where $\text{norm}_{P,\infty}$ is the reference far-field quantity for the normalization parameter norm_P. Substituting Eq. (25) into Eq. (14) and recalling that the numerical Péclet number scales as unity, we obtain:

$$\text{norm}_{P,\infty}^\kappa = \text{Pé}_\infty \rho_\infty c_\infty^2 = \rho_\infty c_\infty^2 \, . \tag{26}$$

16

Eq. (26) provides a proper normalization factor to define the κ viscosity coefficient. The derivation for norm_P^μ is similar and yields

$$\mathrm{norm}_P^\mu = \mathrm{Re}_\infty \rho_\infty c_\infty^2 = \begin{cases} \rho||\vec{u}||^2 & \text{for non-isentropic flows} \\ \rho c^2 = \mathrm{norm}_P^\kappa & \text{for low-Mach flows} \end{cases} . \qquad (27)$$

A smooth function to transition between these two states is obtained by employing a smoothed shifted Heaviside function defined as follows:

$$\sigma(M) = \begin{cases} 0 & \text{if } M \leq M^{\mathrm{thresh}} - a \\ 1 & \text{if } M \geq M^{\mathrm{thresh}} + a \\ \frac{1}{2}\left(1 + \frac{M - M^{\mathrm{thresh}}}{a} + \frac{1}{\pi}\sin\left(\frac{\pi(M - M^{\mathrm{thresh}})}{a}\right)\right) & \text{otherwise} \end{cases}$$
$$(28)$$

where M^{thresh} is a threshold Mach number value beyond which the flow is no longer considered to be low-Mach (we use $M^{\mathrm{thresh}} = 0.05$), M is the local Mach number, and the scalar a determines how rapidly the transition from $\mathrm{norm}_P^\mu = \rho c^2$ to $\mathrm{norm}_P^\mu = \rho||\vec{u}||^2$ occurs in the vicinity of M^{thresh} (e.g., $a = 0.005$). It is easy to verify that

$$\mathrm{norm}_P^\mu = (1 - \sigma(M))\rho c^2 + \sigma(M)\rho||\vec{u}||^2 \qquad (29)$$

satisfies Eq. (27). Finally, we summarize the definition of the viscosity coefficients μ and κ for completeness:

$$\kappa(\vec{r}, t) = \min\left(\mu_{\max}(\vec{r}, t), \kappa_e(\vec{r}, t)\right), \qquad (30a)$$

$$\mu(\vec{r}, t) = \min\left(\mu_{\max}(\vec{r}, t), \mu_e(\vec{r}, t)\right), \qquad (30b)$$

where the first-order viscosity is given by

$$\kappa_{\max}(\vec{r}, t) = \mu_{\max}(\vec{r}, t) = \frac{h}{2}\Big(||\vec{u}|| + c\Big) \tag{30c}$$

and the entropy viscosity coefficients by

$$\kappa_e(\vec{r}, t) = \frac{h^2 \max(\widetilde{R}_{\text{ent}}, J)}{\rho c^2} \text{ and } \mu_e(\vec{r}, t) = \frac{h^2 \max(\widetilde{R}_{\text{ent}}, J)}{\text{norm}_P^\mu} \tag{30d}$$

with the jumps given by

$$J = \max\Big(||\vec{u}||[[\vec{\nabla}P \cdot \vec{n}]], ||\vec{u}||c^2[[\vec{\nabla}\rho \cdot \vec{n}]]\Big) \tag{30e}$$

where norm_P^κ is computed from Eq. (29). The jump J is a function of the jump of pressure and density gradients across the face with respect to its normal vector $\vec{n}$. Then, the largest value over all faces is determined and used in the definition of the viscosity coefficients. With the definition of the viscosity coefficients μ and κ proposed in Eq. (30), the dissipative terms are expected to scale appropriately for very low-Mach regimes as well for transonic and supersonic flows.

4. Extension of the entropy viscosity technique to Euler equations with variable area

Fluid flows in nozzles and in pipes of varying cross-sectional area can be modeled using the variable-area variant of the Euler equations, where the conservative variables are now multiplied by the area A. In addition, these equations differ from the standard Euler equations in that the momentum equation Eq. (31b) contains a non-conservative term proportional to the area gradient. Here, the variable area is assumed to be a smooth function of space only.

$$\partial_t (\rho A) + \vec{\nabla} \cdot (\rho \vec{u} A) = 0, \tag{31a}$$

18

$$\partial_t \left(\rho \vec{u} A \right) + \vec{\nabla} \cdot [A \left(\rho \vec{u} \otimes \vec{u} + P \mathbb{I} \right)] = P \vec{\nabla} A \,, \tag{31b}$$

$$\partial_t \left(\rho E A \right) + \vec{\nabla} \cdot [\vec{u} A \left(\rho E + P \right)] = 0 \,. \tag{31c}$$

The application of the entropy viscosity method to the Euler equations with variable area is not fundamentally different to its application to the standard Euler equations. However, we need to derive the associated dissipative terms and verify that the entropy minimum principle is still satisfied. The variable-area Euler equations with viscous regularization are given below; details of the derivation are provided in Appendix B.

$$\partial_t \left(\rho A \right) + \vec{\nabla} \cdot (\rho \vec{u} A) = \vec{\nabla} \cdot \left(A \kappa \vec{\nabla} \rho \right) \,, \tag{32a}$$

$$\partial_t \left(\rho \vec{u} A \right) + \vec{\nabla} \cdot [A \left(\rho \vec{u} \otimes \vec{u} + P \mathbb{I} \right)] = P \vec{\nabla} A + \vec{\nabla} \cdot \left[A \left(\mu \rho \vec{\nabla}^s \vec{u} + \kappa \vec{u} \otimes \vec{\nabla} \rho \right) \right] \,, \tag{32b}$$

$$\partial_t \left(\rho A E \right) + \vec{\nabla} \cdot [\vec{u} A \left(\rho E + P \right)] =$$
$$\vec{\nabla} \cdot \left[A \left(\kappa \vec{\nabla} \left(\rho e \right) + \frac{1}{2} ||\vec{u}||^2 \kappa \vec{\nabla} \rho + \rho \mu \vec{u} \vec{\nabla}^s \vec{u} \right) \right] \,. \tag{32c}$$

The dissipative terms are quite similar to the ones obtained for the standard Euler equations: each dissipative flux is simply multiplied by the variable area A in order to ensure conservation of the dissipative flux. When assuming a constant area, Eqs. 2 are recovered.

A low-Mach asymptotic limit of the Euler equations with variable area on the same model as in Section 3.2 will lead to the divergence constraint $\vec{\nabla} \cdot (\vec{u} A) = 0$ that can be recast as $\vec{\nabla} \cdot \vec{u} = -\vec{u} \cdot \vec{\nabla} A / A$. The gradient of the area acts as a source term and will force the fluid to accelerate or decelerate, depending on its sign.

5. Discretizations and Solution Techniques

In this section, we briefly describe the spatial and temporal discretizations and the solution techniques used to solve the system of equations Eq. (32). For conciseness, we re-write the system of equations in the following form:

$$\partial_t \mathbf{U} + \vec{\nabla} \cdot \vec{\mathbf{F}}(\mathbf{U}) = \mathbf{S} + \vec{\nabla} \cdot \mathbf{D}(\mathbf{U}) \vec{\nabla} \mathbf{U} \tag{33}$$

where $\mathbf{U} = [\rho A, \, \rho \vec{u} A, \, \rho E A]^T$ is the solution vector, $\mathbf{F}$ denotes the inviscid flux

$$\vec{\mathbf{F}} \equiv \begin{bmatrix} \rho u A \\ \left(\rho u^2 + p \right) A \\ u(\rho E + P) A \end{bmatrix} \tag{34}$$

and $\mathbf{S}$ is a source term that contains the non-conservative term $P\vec{\nabla} A$. The term $\vec{\nabla} \cdot D(\mathbf{U}) \vec{\nabla} \mathbf{U}$ stands for the artificial dissipative terms.

5.1. Spatial and Temporal Discretizations

The system of equations given in Eq. (33) is discretized using a continuous Galerkin finite element method and temporal integrators available through the MOOSE multiphysics framework [14].

5.1.1. Continuous Finite Elements

In order to apply the continuous finite element method, Eq. (33) is multiplied by a test function $\mathbf{W}(\vec{r})$, integrated by parts and each integral is decomposed into a sum of integrals over each element K of the discrete mesh Ω. The following

weak form is obtained:

$$\sum_K \int_K \partial_t \mathbf{U}\,\mathbf{W} - \sum_K \int_K \vec{\mathbf{F}}(\mathbf{U}) \cdot \vec{\nabla}\mathbf{W} + \int_{\partial\Omega} \vec{\mathbf{F}}(\mathbf{U}) \cdot \vec{n}\,\mathbf{W} - \sum_K \int_K \mathbf{S}\,\mathbf{W}$$
$$+ \sum_K \int_K D(\mathbf{U})\vec{\nabla}\mathbf{U} \cdot \vec{\nabla}\mathbf{W} - \int_{\partial\Omega} D(\mathbf{U})\vec{\nabla}\mathbf{U} \cdot \vec{n}\,\mathbf{W} = 0\,. \quad (35)$$

375   The integrals over the elements K are evaluated using a numerical quadrature.

376   The MOOSE framework provides a wide range of test functions and quadrature

377   rules. Linear Lagrange polynomials are employed as test functions in the re-

378   sults section. Second-order spatial convergence will be demonstrated for smooth

379   solutions.

380   *5.1.2. Temporal integration*

381   The MOOSE framework offers both first- and second-order explicit and im-

382   plicit temporal integrators. In all of the numerical examples presented in Sec-

383   tion 6, the temporal derivative will be evaluated using the second-order, back-

384   ward difference temporal integrator BDF2. By considering three consecutive

385   solutions, $\mathbf{U}^{n-1}$, $\mathbf{U}^n$ and $\mathbf{U}^{n+1}$, at times t^{n-1}, t^n and t^{n+1}, respectively, BDF2

386   can be expressed as:

$$\int_K \partial_t \mathbf{U}\,\mathbf{W} = \int_K \left(\omega_0 \mathbf{U}^{n+1} + \omega_1 \mathbf{U}^n + \omega_2 \mathbf{U}^{n-1} \right) \mathbf{W}\,, \qquad (36)$$

with

$$\omega_0 = \frac{2\Delta t^{n+1} + \Delta t^n}{\Delta t^{n+1}\left(\Delta t^{n+1} + \Delta t^n\right)}\,,\ \ \omega_1 = -\frac{\Delta t^{n+1} + \Delta t^n}{\Delta t^{n+1}\Delta t^n}\,,$$
$$\text{and } \omega_2 = \frac{\Delta t^{n+1}}{\Delta t^n\left(\Delta t^{n+1} + \Delta t^n\right)}$$

387   where $\Delta t^n = t^n - t^{n-1}$ and $\Delta t^{n+1} = t^{n+1} - t^n$.

5.2. Boundary conditions

Boundary conditions are implemented by performing a characteristic decomposition to compute the appropriate flux at the boundaries. Our implementation of the subsonic boundary conditions is inspired by the method described in [20] and was adapted for a time implicit solver. Neumann boundary conditions are used for all of the boundary types, except for the inlet supersonic boundary that are strongly imposed with Dirichlet boundary conditions.

For each numerical solution presented in Section 6, the type of boundary conditions used will be specified and taken among the following: supersonic inlet, subsonic inlet (stagnation pressure boundary), subsonic outlet, and supersonic outlet. The artificial diffusion coefficient $D(\mathbf{U})$ is set to zero at the boundary of the computational domain so that the boundary term $\int_{\partial\Omega} D(\mathbf{U})\vec{\nabla}\mathbf{U}\cdot\vec{n}\mathbf{W}$ stemming from the integration by parts of the artificial dissipative terms in Eq. (35) is ignored.

5.3. Solver

A Jacobian-free-Newton-Krylov (JFNK) method is used to solve for the solution at the end of each time step. An approximate Jacobian matrix of the discretized equations was derived and implemented. Obtaining the matrix entries requires that the partial derivatives of pressure with respect to the conservative variables be known (this is relatively simple for the stiffened and ideal gas equations of state but may be more complex for general equations of state). The contributions of the artificial dissipative terms to the Jacobian matrix are approximated by lagging the viscosity coefficients (computing them with the previous solution). For instance, this is shown in Eq. (37) for the dissipative terms present in the continuity equation:

$$\frac{\partial}{\partial\mathbf{U}}\left(\kappa\vec{\nabla}\cdot\rho\vec{\nabla}W\right) \simeq \kappa\frac{\partial}{\partial\mathbf{U}}\left(\vec{\nabla}\cdot\rho\vec{\nabla}W\right), \tag{37}$$

22

where $\mathbf{U}$ denotes any of the conservative variables and W denotes the component of $\mathbf{W}$ associated with the continuity equation. In the above, we have neglected $\frac{\partial \kappa}{\partial \mathbf{U}}$.

6. Numerical Results

1-D and 2-D numerical solutions for the Euler equations with viscous regularization solved using the entropy viscosity method are presented here. Our results show that the new definitions for the viscosity coefficients are robust in the low-Mach limit as well as for for transonic and supersonic flows and that shocks are appropriately resolved.

The first set of 1-D simulations consist of liquid water and steam flowing in a converging-diverging nozzle. This test is of interest for multiple reasons: (a) a steady state can be reached (some stabilization methods are known to have difficulties reaching a steady state, [2, 3]), (b) an analytical solution is available and a space-time convergence study can be performed, (c) it can be performed for liquid and gas phases, wherein the gas phase simulation presents a shock while the liquid-phase simulation has a significantly lower Mach number. Next, a 1-D shock tube test (in a straight pipe), taken from the Leblanc test-case suite [21], is performed. This test is known to be more challenging than Sod shock tubes and the fluid's Mach number varies spatially between 0 and 5. A convergence study is also performed to demonstrate convergence of the numerical solution to the exact solution. A slow moving shock is also investigated [22]. This test helps in assessing the ability of the method to damp the post-shock low frequency noise (oscillations). Finally, a strong shock for a liquid phase (Mach number around 0.1) is also performed [23].

The initial conditions for the aforementioned 1-D test cases are given in Table 1.

ρ_{left}	u_{left}	P_{left}	ρ_{right}	u_{right}	P_{right}
Leblanc shock tube (Section 6.3)					
1	0	$4 \ 10^{-2}$	10^{-3}	0	$4 \ 10^{-11}$
Strong shock for liquid phase (Section 6.4)					
1000	0	10^9	1000	0	10^5
Slow moving shock (Section 6.5)					
1	-0.81	1	3.86	-3.44	10.33

Table 1: Initial conditions for the 1-D test cases (density in kg/m^3, velocity in m/s, pressure in Pa).

The 2-D simulations are outlined next. First, 2-D subsonic flows around a cylinder [12] and over a circular hump [24] are presented for various far-field Mach numbers (as low of 10^{-7}). Numerical results of a supersonic flow over a compression corner are provided to illustrate the ability of the new viscosity definitions to handle supersonic flows. Convergence studies are performed when analytical solutions are available.

For each simulation, data relative to the boundary conditions, the Courant-Friedrichs-Lewy number (CFL), mesh and equation of state are provided. All of the numerical solutions presented are obtained using BDF2 as temporal integrator and linear (1-D mesh), $\mathbb{P}_1$ (2-D triangular mesh), and $\mathbb{Q}_1$ (2-D quadrangular mesh) finite elements. The spatial integrals are numerically computed using a second-order Gauss quadrature rule. Steady-state is detected in a transient simulation by monitoring the nonlinear residual before proceeding with the Newton solves for a given time step. The ideal gas [25] or stiffened gas equations of state [26] are used; a generic expression is given in Eq. (38).

$$P = (\gamma - 1)\rho(e - q) - \gamma P_\infty \qquad (38)$$

where the parameters γ, q, and P_∞ are fluid-dependent and are given in Table 2. The ideal gas equation of state is recovered by setting $q = P_\infty = 0$ in Eq. (38).

24

The entropy function for the stiffened gas equation of state is concave and given

Table 2: Stiffened Gas Equation of State parameters for steam and liquid water.

fluid	γ	C_v $(J.kg^{-1}.K^{-1})$	P_∞ (Pa)	q $(J.kg^{-1})$
liquid water (Section 6.1)	2.35	1816	10^9	$-1167\ 10^3$
steam (Section 6.2)	1.43	1040	0	$2030\ 10^3$
liquid water (Section 6.4)	4.4	1000	$6\ 10^8$	0

by

$$s = C_v \ln \left(\frac{P + P_\infty}{\rho^{\gamma-1}} \right),$$

where C_v is the heat capacity at constant volume.

Finally, the convergence rates are computed using the following relation

$$\text{rate}_h = \ln \left(\frac{||U_{2h} - U_{\text{exact}}||}{||U_h - U_{\text{exact}}||} \right) / \ln 2 \tag{39}$$

where $|| \cdot ||$ denotes either the L_1 or L_2 norms and h is the characteristic grid size.

6.1. Liquid water in a 1-D converging-diverging nozzle

A simulation for liquid flow through a 1-D converging-diverging nozzle is performed. The variable area expression is given by $A(x) = 1 + 0.5 \cos(2\pi x/L)$ with length $L = 1m$. At the inlet, the stagnation pressure and temperature are set to $P_0 = 1MPa$ and $T_0 = 453K$, respectively. At the outlet, only the static pressure is specified: $P_s = 0.5MPa$. Initially, the liquid is at rest, the temperature is uniform and equal to the stagnation temperature and the pressure linearly decreases from the stagnation pressure inlet value to the static pressure outlet value. The stiffened gas equation of state is used to model the liquid water with the parameters provided in Table 2. Because of the low pressure

⁴⁶⁹ difference between the inlet and the outlet, the smooth initial conditions, and

⁴⁷⁰ the large value of P_∞ in Eq. (38), the flow remains subsonic and thus displays

⁴⁷¹ no shock. A detailed derivation of the exact steady-state solution can be found

⁴⁷² in [27]. A uniform mesh of 50 cells was used to obtain the numerical solution

⁴⁷³ and the time step size was computed using a CFL number of 750. Plots of

⁴⁷⁴ the Mach number, density, and pressure are given at steady state in Fig. 1 for

⁴⁷⁵ the numerical and exact solutions. The viscosity coefficients are also graphed

⁴⁷⁶ in Fig. 1d.

(a) Mach number

(b) Density

(c) Pressure
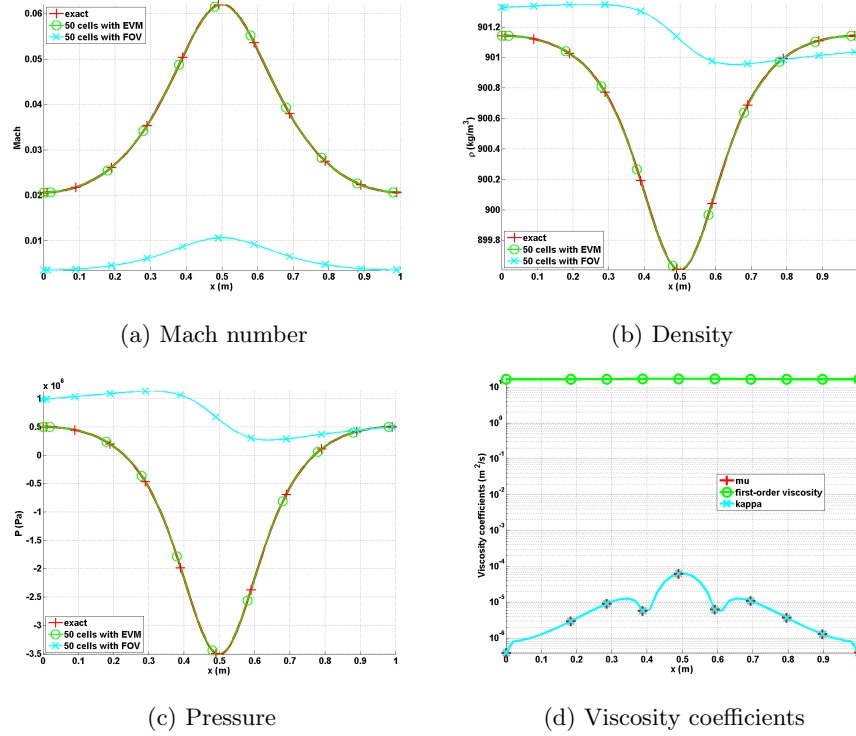
(d) Viscosity coefficients

Figure 1: Steady-state solution for a liquid flowing through a 1-D converging-diverging nozzle.

⁴⁷⁷ In Fig. 1, the numerical solutions obtained using the first-order viscosity

⁴⁷⁸ (FOV) and the entropy viscosity method (EVM) are plotted against the exact

26

solution. The numerical solution obtained with the EVM and the exact solution overlap, even for a fairly coarse mesh (50 cells). On the other hand, the numerical solution obtained with the FOV does not give the correct steady state: this is an illustration of the effect of ill-scaled dissipative terms in the low-Mach limit when using the FOV. Note that the entropy viscosity coefficient is very small compared to the first-order one (Fig. 1d): (i) the numerical solution is smooth as shown in Fig. 1 and (ii) the flow is in a isentropic low-Mach regime A convergence study was performed using the exact solution as a reference: the L_1 and L_2 norms of the error and the corresponding convergence rates are computed at steady state on various uniform meshes from 4 to 256 cells. Spatial convergence results using linear finite elements are reported in Table 3 and Table 4 for the primitive variables: density, velocity and pressure.

Table 3: L_1 norm of the error for the liquid phase in a 1-D converging-diverging nozzle at steady state.

cells	density	rate	pressure	rate	velocity	rate
4	$2.8037 \ 10^{-1}$	—	$8.4705 \ 10^5$	—	7.2737	—
8	$1.3343 \ 10^{-1}$	1.07	$4.7893 \ 10^5$	0.82	6.1493	0.24
16	$2.9373 \ 10^{-2}$	2.18	$1.0613 \ 10^5$	2.17	1.2275	2.32
32	$5.1120 \ 10^{-3}$	2.52	$1.8446 \ 10^4$	2.52	$1.8943 \ 10^{-1}$	2.69
64	$1.0558 \ 10^{-3}$	2.28	$3.7938 \ 10^3$	2.28	$3.7919 \ 10^{-2}$	2.32
128	$2.3712 \ 10^{-4}$	2.15	$8.4471 \ 10^2$	2.17	$8.5517 \ 10^{-3}$	2.15
256	$5.6058 \ 10^{-5}$	2.08	$1.9839 \ 10^2$	2.09	$2.0475 \ 10^{-3}$	2.06
512	$1.3278 \ 10^{-5}$	2.08	$4.6622 \ 10^1$	2.09	$4.9516 \ 10^{-4}$	2.04
1024	$3.1193 \ 10^{-6}$	2.08	$1.1755 \ 10^1$	1.99	$1.2379 \ 10^{-4}$	2.00

Table 4: L_2 norm of the error for the liquid phase in a 1-D converging-diverging nozzle at steady state.

cells	density	rate	pressure	rate	velocity	rate
4	$3.106397 \ 10^{-1}$	–	$5.254445 \ 10^5$	–	3.288543	–
8	$7.491623 \ 10^{-2}$	2.05	$1.636966 \ 10^5$	1.68	1.823880	0.85
16	$2.079858 \ 10^{-2}$	1.85	$4.627338 \ 10^4$	1.49	$4.990605 \ 10^{-1}$	0.87
32	$5.329627 \ 10^{-3}$	1.96	$1.180287 \ 10^4$	1.97	$1.261018 \ 10^{-1}$	1.98
64	$1.341583 \ 10^{-3}$	1.99	$2.967104 \ 10^3$	1.99	$3.160914 \ 10^{-2}$	1.99
128	$3.359766 \ 10^{-4}$	1.99	$7.428087 \ 10^2$	1.99	$7.907499 \ 10^{-3}$	1.99
256	$8.403859 \ 10^{-5}$	1.99	$1.857861 \ 10^2$	1.99	$1.977292 \ 10^{-3}$	1.99
512	$2.10075 \ 10^{-5}$	2.00	$4.7024 \ 10^1$	1.98	$4.9516 \ 10^{-4}$	1.99

We note that the convergence rates measured in both the L_1 and L_2 norm of the error are equal to 2; the entropy viscosity method preserves the high-order accuracy of the discretization used when the numerical solution is smooth. The new definition of the entropy viscosity coefficients behaves appropriately in the low-Mach limit.

6.2. Steam in a 1-D converging-diverging nozzle

We use the same nozzle geometry, initial conditions and boundary conditions as in the previously example but replace liquid water with steam and use the steam parameters of the stiffened gas equation of state, Table 2. In this example, compressible effects will become dominant. The pressure difference between the inlet and outlet is large enough to accelerate the steam through the nozzle, leading to the formation of a shock in the diverging portion of the nozzle. The behavior is different from the one observed for the liquid water phase in Section 6.1 because of the liquid to gas density ratio is about $1,000$. An exact solution at steady state is available for the gas phase [27]. The aim of this section is to show that when using the new definitions of the viscosity coefficients (Eq. (30)), the shock can be correctly resolved without spurious oscillations. The steady-state numerical solution, obtained using a uniform mesh

509 with 500 cells, is shown in Fig. 2. The CFL was set to 80 (a high CFL value
510 can be used because the shock is stationary).

(a) Mach number

(b) Density

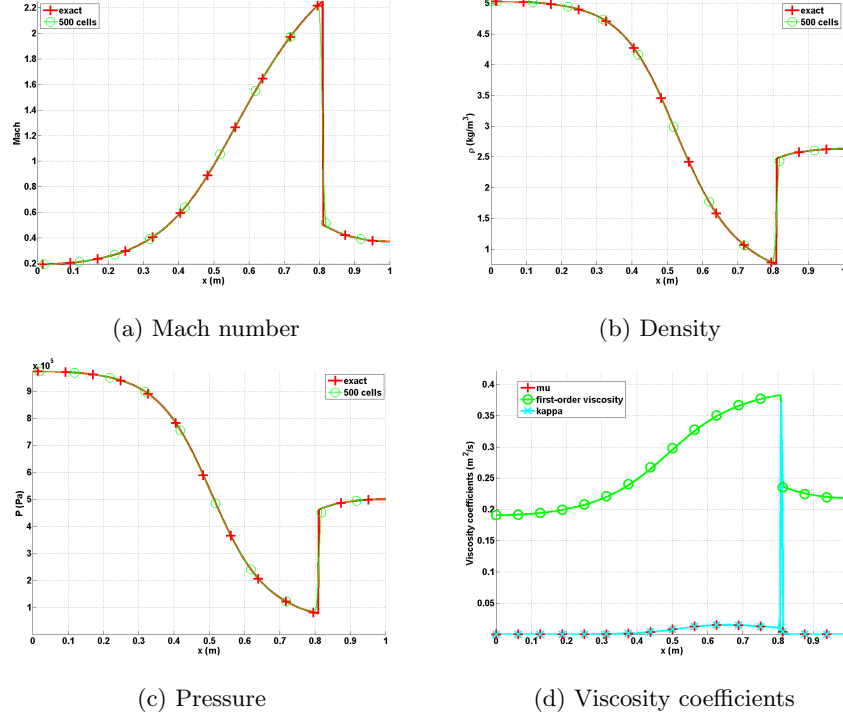(c) Pressure

(d) Viscosity coefficients

Figure 2: Steady-state solution for vapor phase flowing in a 1-D converging-diverging nozzle.

511 The steady-state solution of the density, Mach number and pressure are
512 given in Fig. 2. The steady-state solution exhibits a shock around $x = 0.8m$
513 and matches the exact solution. In Fig. 2d, the first-order and entropy viscosity
514 coefficients are plotted at steady state (on a log scale): the entropy viscosity
515 coefficient is peaked in the shock region around $x = 0.8m$ where it saturates to
516 the first-order viscosity coefficient. Elsewhere, the entropy viscosity coefficient
517 is small. In order to prove convergence of the numerical solution to the exact
518 solution, a convergence study is performed. Because of the presence of a shock,
519 second-order accuracy is not expected and the convergence rate of a numerical

29

⁵²⁰ solution should be 1 and 1/2 when measured in the L_1 and L_2 norms, respec-

⁵²¹ tively (see Theorem 9.3 in [28]). Results are reported in Table 5 and Table 6

⁵²² for the primitive variables: density, velocity and pressure. The convergence

⁵²³ rates for the L_1 and L_2 norms of the error computed using Eq. (39) are in good

agreement with the theoretical values.

Table 5: L_1 norm of the error for the vapor phase in a 1-D converging-diverging nozzle at steady state.

cells	density	rate	pressure	rate	velocity	rate
5	$0.72562 \ 10^{-1}$	$-$	$1.5657 \ 10^5$	$-$	173.69	$-$
10	$0.4165 \ 10^{-1}$	0.80	$9.6741 \ 10^4$	0.63	120.69	0.53
20	$0.20675 \ 10^{-1}$	1.01	$4.9193 \ 10^4$	0.97	72.149	0.74
40	$0.093703 \ 10^{-1}$	1.14	$2.0103 \ 10^4$	0.73	34.716	1.06
80	$0.047328 \ 10^{-1}$	0.99	$1.0208 \ 10^4$	0.98	16.082	1.11
160	$0.023965 \ 10^{-2}$	0.98	$5.1969 \ 10^3$	0.97	7.9573	1.02
320	$0.020768 \ 10^{-2}$	1.03	$2.5116 \ 10^3$	1.05	3.7812	1.07
640	$0.0059715 \ 10^{-2}$	0.98	$1.2754 \ 10^3$	0.98	1.8353	1.04

⁵²⁴

Table 6: L_2 norm of the error for the vapor phase in a 1-D converging-diverging nozzle at steady state.

cells	density	rate	pressure	rate	velocity	rate
5	$9.7144 \ 10^{-1}$	$-$	$2.0215 \ 10^5$	$-$	236.94	$-$
10	$5.9718 \ 10^{-1}$	0.70	$1.3024 \ 10^5$	0.63	166.56	0.51
20	$2.9503 \ 10^{-1}$	1.02	$6.6503 \ 10^4$	0.97	103.36	0.69
40	$1.8193 \ 10^{-1}$	0.69	$4.0171 \ 10^4$	0.73	66.374	0.64
80	$1.3366 \ 10^{-1}$	0.44	$2.3163 \ 10^4$	0.44	42.981	0.63
160	$9.6638 \ 10^{-2}$	0.47	$1.7263 \ 10^4$	0.42	31.717	0.44
320	$7.0896 \ 10^{-2}$	0.45	$1.2763 \ 10^4$	0.44	23.138	0.45
640	$5.2191 \ 10^{-2}$	0.44	$9.4217 \ 10^3$	0.44	16.910	0.45

⁵²⁵ *6.3. Leblanc shock tube*

⁵²⁶   The 1-D Leblanc shock tube is a Riemann problem designed to test the

⁵²⁷ robustness and the accuracy of stabilization methods. The initial conditions

⁵²⁸ are given in Table 1. The ideal gas equation of state (with $\gamma = 5/3$) is used to

⁵²⁹ compute the pressure. This test is computationally challenging because of the

⁵³⁰ large pressure ratio at the initial interface. The computational domain consists

⁵³¹ of a 1-D straight pipe of length $L = 9m$ with the initial interface located at

⁵³² $x = 2m$. At $t = 0\,s$, the interface is removed. The numerical solution is run

⁵³³ until $t = 4\,s$ and the density, momentum and total energy profiles are given in

⁵³⁴ Fig. 3, along with the exact solution. The viscosity coefficients are also plotted

⁵³⁵ in Fig. 3d. These plots were run with three different uniform meshes of 800,

⁵³⁶ 3200, and 6000 cells and a constant $CFL = 1$.

(a) Density

(b) Momentum

(c) Total energy

(d) Viscosity coefficients
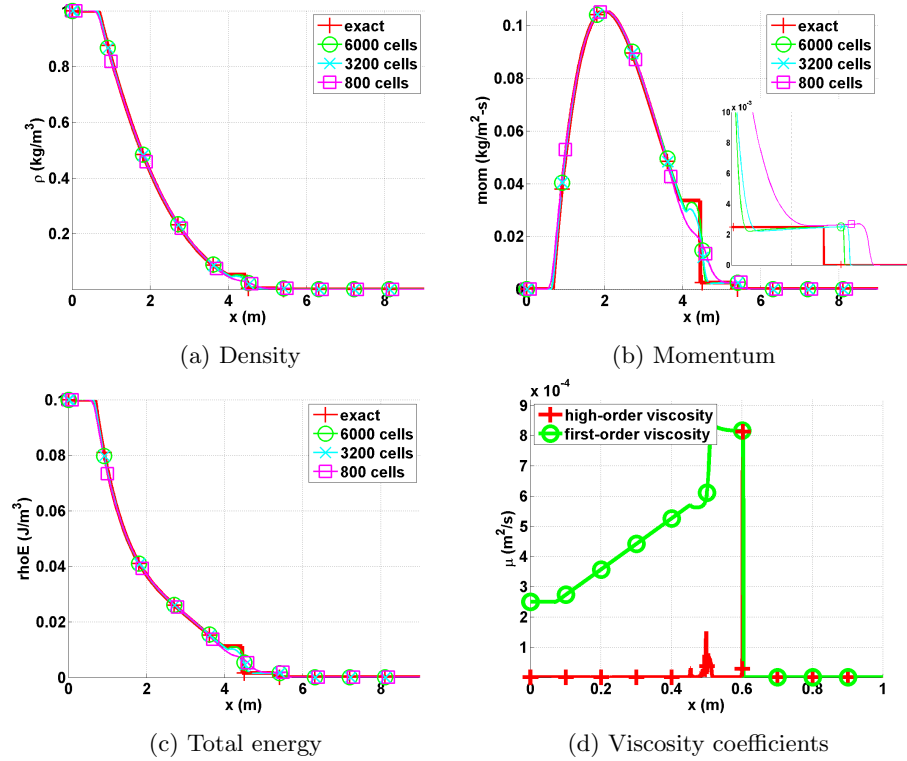
Figure 3: Exact and Numerical solutions for the 1-D Leblanc shock tube at $t = 4\,s$.

⁵³⁷   The density, momentum and total energy profiles are provided in Fig. 3.

⁵³⁸ In Fig. 3b, the shock region is zoomed in for better resolution: the shock is

⁵³⁹ well resolved. We also observe that the shock position computed numerically

31

converges to the exact position under mesh refinement. The contact wave at $x = 4.5m$ can be seen in Fig. 3b. The entropy viscosity coefficient profile is shown in Fig. 3d and behaves as expected: it saturates to the first-order viscosity in the shock region, thus preventing oscillations from forming. At the location of the contact wave, a smaller peak is observed and is due to the presence of the jump terms in the definition of the entropy viscosity coefficient (Eq. (30)). The Mach number, not plotted, is of the order of 1.3 just before the shock and reaches a maximum value close to 5 in the contact region.

Once again, a convergence study is performed in order to prove convergence of the numerical solution to the exact solution. As in the previous example (vapor phase in the 1-D nozzle, Section 6.2), the expected convergence rates in the L_1 and L_2 norms are 1 and $1/2$, respectively. The exact solution was obtained by running a 1-D Riemann solver and used as the reference solution to compute the L_1 and L_2-norms that are reported in Table 7 and Table 8 for the conservative variables: density, momentum and total energy. The convergence rates are again approaching their theoretical values.

Table 7: L_1 norm of the error for the 1-D Leblanc test at $t = 4s$.

cells	density	rate	momentum	rate	total energy	rate
100	$1.0354722 \ 10^{-2}$	–	$3.5471714 \ 10^{-3}$	–	$1.4033046 \ 10^{-3}$	–
200	$7.2680512 \ 10^{-3}$	0.51	$2.5933119 \ 10^{-3}$	0.45	$9.8611746 \ 10^{-4}$	0.51
400	$5.0825628 \ 10^{-3}$	0.52	$2.0668092 \ 10^{-3}$	0.33	$7.7844421 \ 10^{-4}$	0.34
800	$3.4025056 \ 10^{-3}$	0.58	$1.4793838 \ 10^{-3}$	0.48	$5.5702549 \ 10^{-4}$	0.48
1600	$2.1649953 \ 10^{-3}$	0.65	$9.7152832 \ 10^{-4}$	0.61	$3.5720171 \ 10^{-4}$	0.64
3200	$1.2465433 \ 10^{-3}$	0.79	$5.5937409 \ 10^{-4}$	0.79	$2.0491799 \ 10^{-4}$	0.80
6400	$6.4476928 \ 10^{-4}$	0.95	$3.0244198 \ 10^{-4}$	0.89	$1.0914891 \ 10^{-4}$	0.91
12800	$3.3950948 \ 10^{-4}$	0.93	$1.5958118 \ 10^{-4}$	0.92	$5.7909794 \ 10^{-5}$	0.91

6.4. 1-D shock tube with a liquid phase

The purpose of this test is to investigate the ability of the entropy viscosity method to stabilize a strong shock with a small Mach number [23] (this reference

32

Table 8:   L$_2$ norm of the error for the 1-D Leblanc test at $t = 4s$.

cells	density	rate	momentum	rate	total energy	rate
100	5.7187851 10^{-3}	–	1.7767236 10^{-3}	–	7.6112265 10^{-4}	–
200	3.8995238 10^{-3}	0.55	1.4913161 10^{-3}	0.25	5.5497308 10^{-4}	0.46
400	2.8103526 10^{-3}	0.47	1.3305301 10^{-3}	0.16	4.6063172 10^{-4}	0.27
800	2.1081933 10^{-3}	0.41	1.1398931 10^{-3}	0.22	3.7798953 10^{-4}	0.29
1600	1.5731052 10^{-3}	0.42	9.0394227 10^{-4}	0.33	2.9584646 10^{-4}	0.35
3200	1.0610667 10^{-3}	0.57	6.2735595 10^{-4}	0.53	2.054455 10^{-4}	0.53
6400	7.3309974 10^{-4}	0.53	4.4545754 10^{-4}	0.49	1.4670834 10^{-4}	0.49
12800	5.1020991 10^{-4}	0.52	3.1266758 10^{-4}	0.51	1.0299897 10^{-5}	0.51

is for a two-phase flow model but we are only interested in the initial conditions for the liquid phase): the Mach number in the shock region is of the order of 0.1. In this case, as explained in Section 3.2, the viscosity coefficients are required to have different order of magnitude in order to ensure the correct scaling of the dissipative terms. The purpose of this test is to validate the approach presented in Section 3.2.

The stiffened gas equation of state is used to model a liquid flow with the parameters given in Table 2. The computational domain of length $L = 1m$ is uniformly discretized using 500 cells. The step initial conditions are given in Table 1. The simulation is run with a $CFL = 1$ until the final time $t_{\text{final}} = 7\ 10^{-5}s$. Results for pressure, density, velocity and the viscosity coefficients are given in Fig. 4 along with the exact solution for comparison purposes. The numerical solution is in good agreement with exact solution in Fig. 4a. The viscosity coefficients μ and κ are not equal in the shock because the Mach number is of order 0.1. The viscosity coefficient κ saturates to the first-order viscosity in the shock region around $x = 0.65m$ and is sufficient to stabilize the numerical scheme.
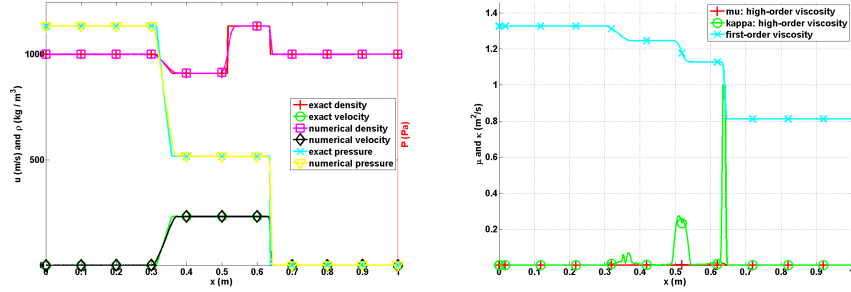
(a) Density, velocity and pressure profiles.　　(b) Viscosity coefficients profile.

Figure 4: Numerical solution for the 1-D liquid shock tube at at $t_{\text{final}} = 7 \; 10^{-5} s$.

6.5. 1-D slow moving shock

Slow moving shocks are known to produce post-shock noise of low frequency that is not damped by some numerical dissipation methods [22]. The aim of this simulation is to test the ability of the entropy viscosity method to dampen the low frequency waves. The 1-D slow moving shock consists of a shock wave moving from left to right with the initial conditions given in Table 1. The ideal gas equation of state is used with a heat capacity ratio $\gamma = 1.4$. In order to make the shock travel a significant distance, the final time is taken equal to $t = 1.1 \, s$. A pressure boundary condition is used at the left boundary to let the rarefaction and contact waves exit the domain. The numerical solution, obtained with 200 equally-spaced cells, is given in Fig. 5 and is compared to the exact solution obtained from a Riemann solver. We use a CFL of 1. With this CFL value, it takes about 50 time steps for the shock to traverse one cell. The numerical results are in good agreement with the exact solution and do not display any post-shock noise. The rarefaction and contact waves are not visible on Fig. 5a since they exited the computational domain through the left pressure boundary condition earlier. As explained in [29], Godunov's type methods usually fail to resolve a slow moving shock because of the nature of the stabilization method:

the method scales as the eigenvalue of the appropriate field. In the case of a slow moving shock, the dissipation added to the system is under-estimated and leads to post-shock noise. In the case of the entropy viscosity method, the entropy residual detects the shock position and the viscosity coefficients saturate to the first-order viscosity values in the shock region. The main difference between a Godunov's type method and the entropy viscosity method lies in the definition of the first-order viscosity coefficients that are proportional to the *local maximum eigenvalue* $||\vec{u}|| + c$ and not to the eigenvalue of the characteristic field.

(a) Velocity, density and pressure (b) Viscosity coefficients
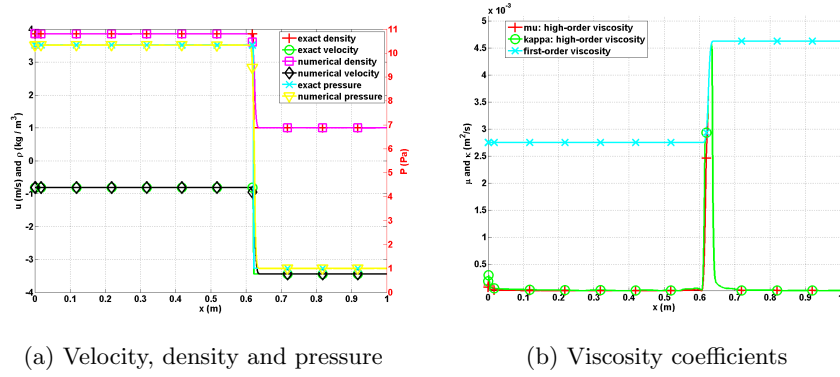
Figure 5: Slow moving shock profiles at $t = 1.1s$.

6.6. Subsonic flow over a 2-D cylinder

Fluid flow over a 2-D cylinder is often used as a benchmark case to test numerical schemes in the low-Mach regime [10, 11, 12]. For this test, an analytical solution is available in the incompressible limit and is often referred to as the potential steady-state flow solution. The main features of the potential flow are the following:

- The solution is symmetric: the iso-Mach contour lines are used to assess the symmetry of the numerical solution;

- The steady-state velocity at the top of the cylinder is twice the incoming velocity set at the inlet;

35

612 • The spatial steady-state pressure variations are proportional to the square

613   of inlet Mach number, i.e.,

$$\delta P = \frac{\max(P(\vec{r})) - \min(P(\vec{r}))}{\max(P(\vec{r}))} \propto M_\infty^2 \tag{40}$$

614   where δP and M_∞ denote the spatial steady-state pressure variations and

615   the inlet Mach number, respectively.

616 The computational domain consists of a 1×1 square with a circular hole of

617 radius 0.05 in its center. A $\mathbb{P}_1$ triangular mesh with 4008 triangular elements

618 is employed to discretize the geometry. The ideal gas equation of state, with

619 $\gamma = 1.4$ is used. At the inlet, a subsonic stagnation boundary condition is

620 used: the stagnation pressure and temperature are computed using the following

621 relations:

$$\begin{cases} P_0 = P \left(1 + \frac{\gamma-1}{2}M^2\right)^{\frac{\gamma-1}{\gamma}} \\ T_0 = T \left(1 + \frac{\gamma-1}{2}M^2\right) \end{cases} \tag{41}$$

622 A static pressure boundary condition, with static pressure $P_s = 101,325\ Pa$,

623 is set at the outlet boundary. The implementation of the pressure boundary

624 conditions is based on [20]. A solid wall boundary condition is set for the top

625 and bottom walls of the computational domain. The simulations are run until

626 a steady state is reached (with a CFL of 40). When the residual norm (for all

627 equations) is less than 10^{-12} the steady state is considered to have been reached.

628   Several simulations are performed, with inlet Mach numbers M_{inlet} ranging

629 from 10^{-3} to 10^{-7}, and are shown in Fig. 6. The iso-Mach contour lines are

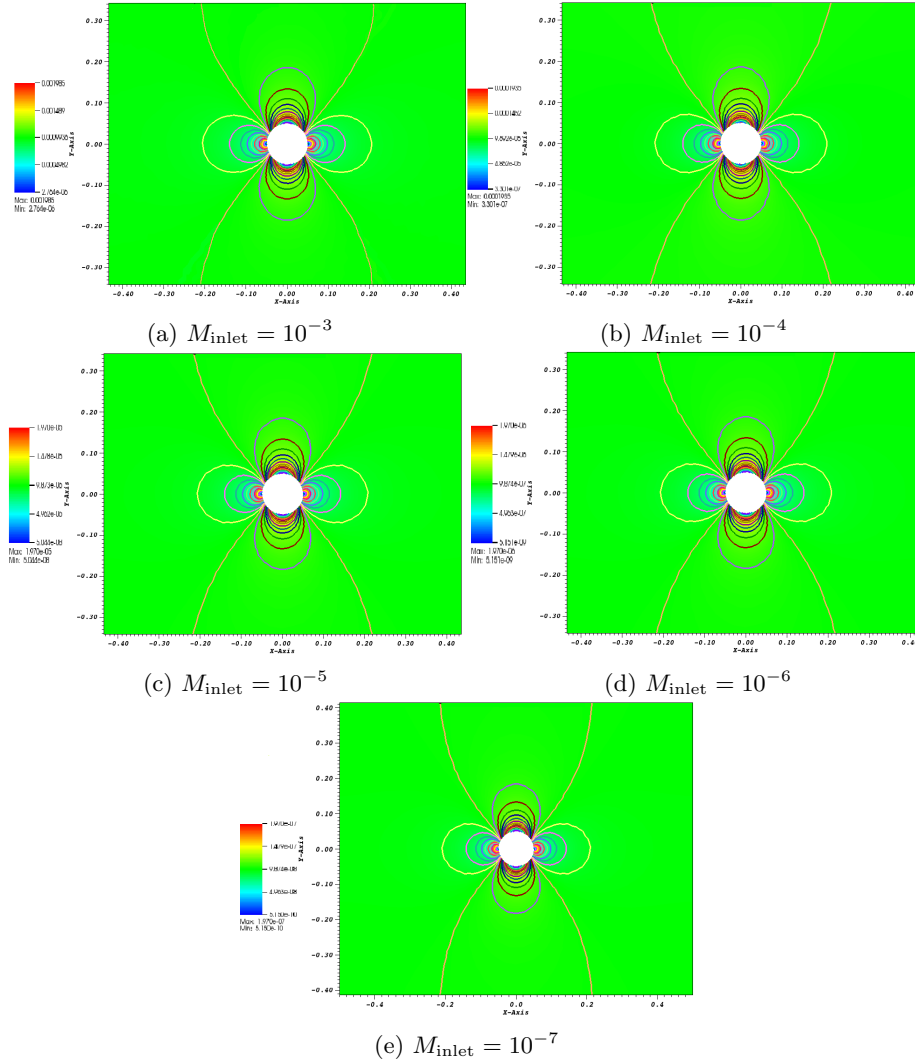630 drawn using 30 equally-spaced intervals, from 2×10^{-10} to M_{inlet}.

Figure 6: Iso-Mach lines for a subsonic flow over a 2-D cylinder with inlet Mach number values from ranging from 10^{-3} to 10^{-7} (steady-state solution).

The steady-state velocity at the top of the cylinder and at the inlet are given for different Mach-number values (ranging from 10^{-3} to 10^{-7}) in Table 9. The ratio of the inlet velocity to the velocity at the top of cylinder is also computed and is very close to the theoretical value of 2 that is expected in the incompressible limit.

37

Table 9: Steady-state velocity ratio for different Mach numbers.

Mach number	inlet velocity	velocity at the top of the cylinder	ratio
10^{-3}	$2.348\ 10^{-3}$	$1.176\ 10^{-3}$	1.99
10^{-4}	$2.285\ 10^{-4}$	$1.145\ 10^{-4}$	1.99
10^{-5}	$2.283\ 10^{-5}$	$1.144\ 10^{-5}$	1.99
10^{-6}	$2.283\ 10^{-6}$	$1.144\ 10^{-6}$	1.99
10^{-7}	$2.283\ 10^{-7}$	$1.144\ 10^{-7}$	1.99

In Fig. 7, the spatial steady-state variations in pressure and velocity are plotted as a function of the Mach number (on a log-log scale). The spatial steady-state pressure variations are expected to be of the order of M^2 in the incompressible limit, which we observe. From Bernoulli's principle, this implies that the velocity spatial variations should be of order M in the incompressible limit, which we also observe in Fig. 7. It is known that some stabilization methods, e.g., [10, 11, 12], can produce spatial steady-state pressure variations with the wrong Mach-number order. Here, the entropy viscosity method yields the correct orders in the low-Mach limit. For ease of comparison, reference lines with slope values of 1 and 2 are also plotted.
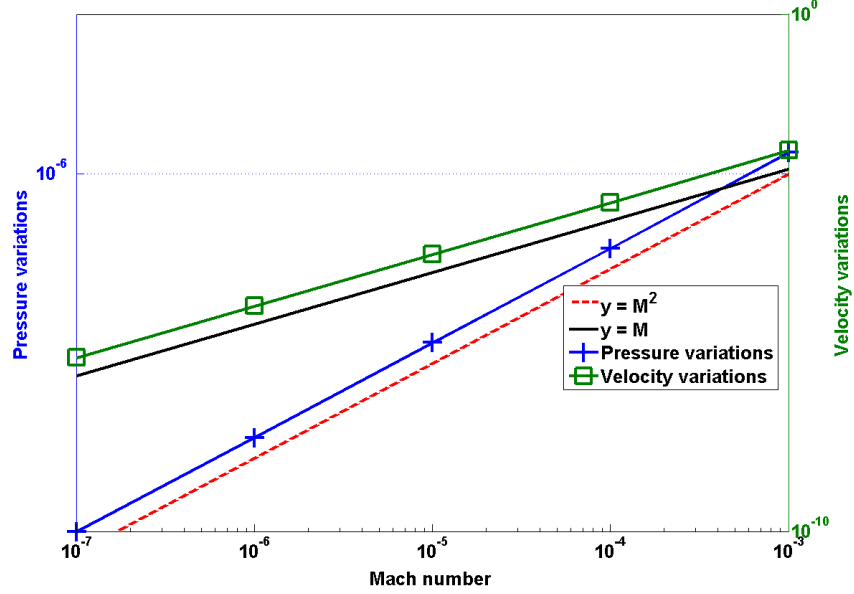
Figure 7: Log-log plot of the spatial steady-state pressure and velocity variations as a function of the far-field Mach number.

6.7. Subsonic flow over a 2-D hump

This is a another example of an internal flow configuration. It consists of a channel of height $L = 1$ m and length $3L$, with a circular bump of length L and thickness $0.1L$. The bump is located on the bottom wall at a distance L from the inlet. The system is initialized with an uniform pressure $P = 101,325$ Pa and temperature $T = 300$ K. The initial velocity is computed from the inlet Mach number, the pressure, the temperature and the ideal gas equation (with $\gamma = 1.4$). Here, $C_v = 717$ $J/kg - K$. At the inlet, a subsonic stagnation boundary condition is used and the stagnation pressure and temperature are computed using Eq. (41). The static pressure $P_s = 101,325$ Pa is set at the subsonic outlet. The results are shown in Fig. 8a, Fig. 8b, Fig. 8c and Fig. 8d for the inlet Mach numbers $M_\infty = 0.7$, $M_\infty = 0.01$, $M_\infty = 10^{-4}$ and $M_\infty = 10^{-7}$, respectively. It is expected that, for low Mach numbers, the solution does not

39

659 depend on the Mach number and is identical to the incompressible flow solution.

660 On the other hand, for a flow with $M = 0.7$, the compressible effects become

661 non negligible and a shock can form. An uniform grid of 3352 Q_1 elements was

662 used to obtain the numerical solution for Mach numbers less than and equal

663 to $M_\infty = 0.01$. A spatial mesh, once refined, was employed for the $M_\infty = 0.7$

664 simulation in order to better resolve the shock. A CFL of 20 was employed and

665 the simulations were run until steady state.
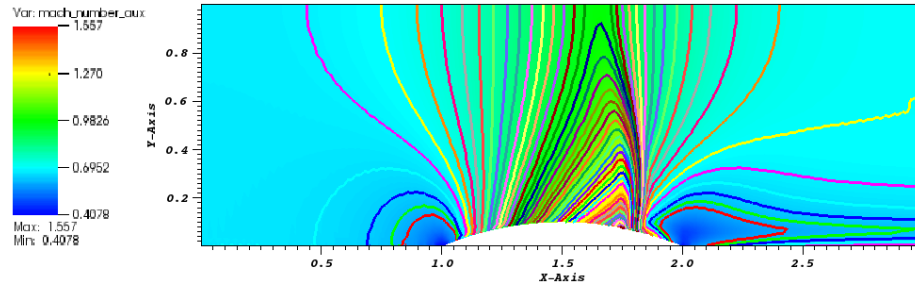
(a) Mach 0.7
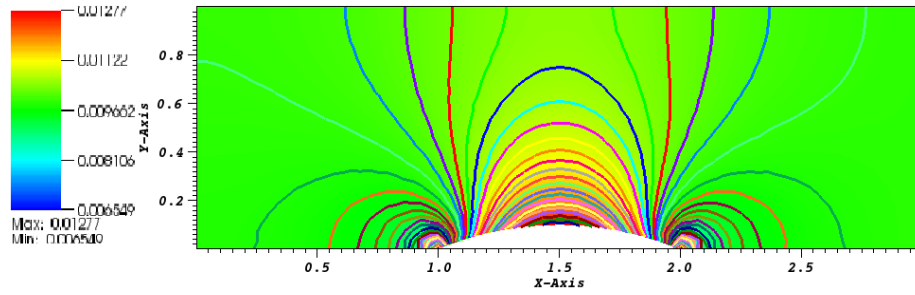
(b) Mach 10^{-2}
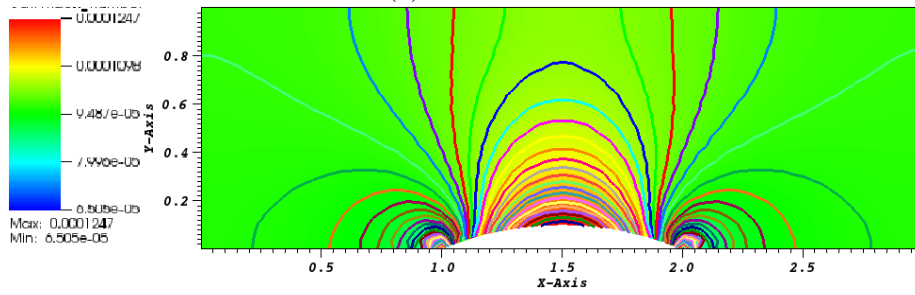
(c) Mach 10^{-5}
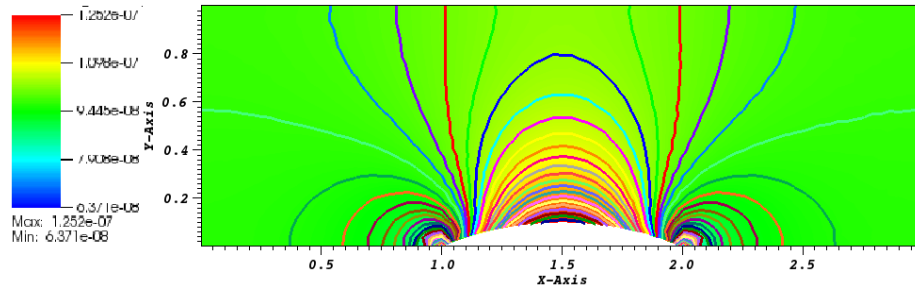
(d) Mach 10^{-7}

Figure 8: Iso-Mach lines for a 2-D flow over a circular bump (steady-state solution).

41

The results shown in Fig. 8b, Fig. 8c and Fig. 8d correspond to the low-Mach regime. The iso-Mach lines are drawn ranging from the minimum and the maximum values (provided in each legend) using 50 equally-spaced intervals. The steady-state solution is symmetric and does not depend on the value of the inlet Mach number, as expected in the incompressible limit.

In Fig. 8a, the steady-state numerical solution develops a shock: the compressibility effects are no longer small. The iso-Mach lines are also plotted with 50 intervals and range from 0.4 to 1.6. The shock is well resolved and does not display any instabilities or spurious oscillations.

6.8. Supersonic flow in a compression corner

In this last example, we consider a supersonic flow at Mach 2.5 impinging on a corner with an angle of $15°$. From the oblique shock theory [16], an analytical solution for this supersonic flow is available and gives the downstream-to-upstream pressure, entropy and Mach number ratios. The initial conditions are chosen to be spatially uniform: the pressure and temperature are set to $P = 101, 325\ Pa$ and $T = 300\ K$, respectively. The ideal gas equation of state is used with the same parameters as in Section 6.7. The initial velocity is computed from the upstream Mach number. The inlet is supersonic and therefore, the pressure, temperature and velocity are specified using Dirichlet boundary conditions. The outlet is also supersonic and none of the characteristics enter the domain through this boundary; the values are computed by the solver.

The simulation is run with $CFL = 2$ until steady state is reached. A 2-D mesh made of $16, 109\ \mathbb{Q}_1$ elements is used. The ratios for pressure, entropy and Mach number computed using the analytical (published with only two significant digits) and the numerical solutions are given in Table 10; they are in excellent agreement. The shock wave angle at steady state is also known and given by

the so-called $\theta - \beta - M$ relation:

$$\tan\theta = 2\cot\beta\frac{M^2\sin^2\beta - 1}{M^2\left(\gamma + \cos^2(2\beta)\right) + 2},\tag{42}$$

where θ, β and M denote the corner angle, the shock wave angle, and the upstream Mach number, respectively. For Mach 2.5 and a 15° corner angle, the analytical value for the shock wave angle is 36.94° at steady state. From Fig. 9a, the numerical value of the shock wave angle can be measured and is found to be equal to 36.9° and thus is in excellent agreement with the theory.

	analytical	numerical
Pressure	2.47	2.467
Mach number	0.74	0.741
Entropy	1.03	1.026

Table 10: Ratio of analytical and numerical downstream to upstream quantities for the compression corner problems (corner angle of 15° and inlet $M = 2.5$ (analytical values from [16]).

(a) Mach number

(b) Viscosity coefficients

(c) Pressure and Mach number

(d) Difference between inlet and outlet mass flow rates as a function of time.
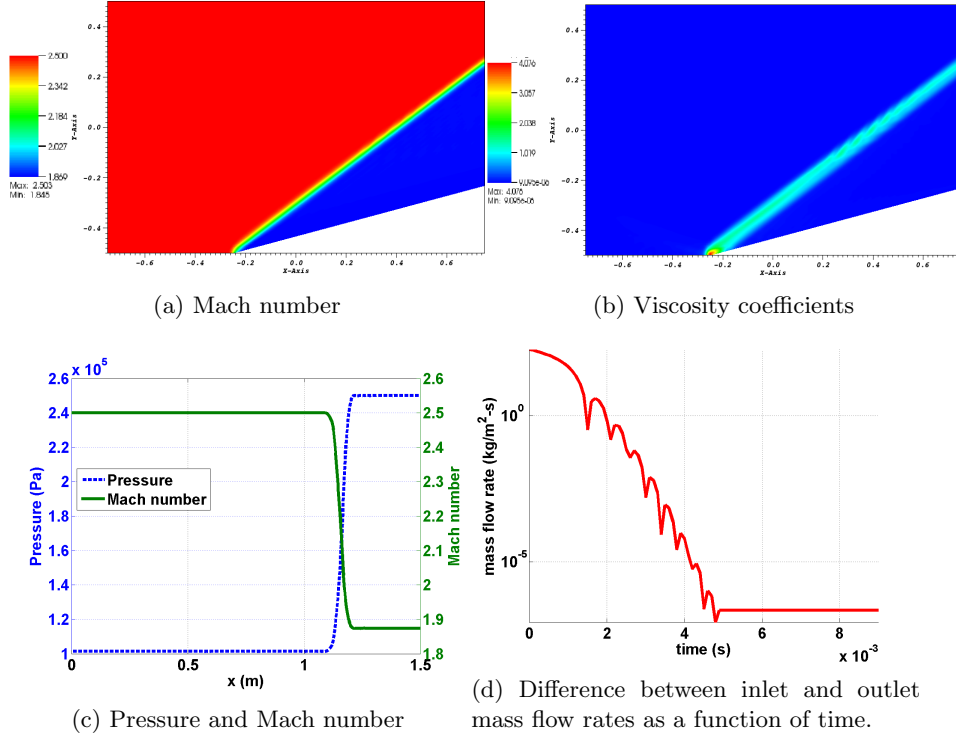
Figure 9: Steady-state solution for a flow in a 2-D compression corner.

The steady-state numerical solution is given in Fig. 9; the Mach number and the viscosity coefficients are plotted in Fig. 9a and Fig. 9b, respectively. The steady-state solution is composed of two regions of constant state separated by an oblique shock. Fig. 9b shows that the viscosity coefficient is large in the shock and small elsewhere, as expected. At the location of the corner ($x = -0.25m$, $y = -0.5m$), the viscosity coefficient is peaked because of the treatment of the wall boundary condition: at this particular node, the normal is not well defined and may cause some numerical errors. The 1-D graphs at $y = 0$ for the pressure and the Mach number are given in Fig. 9c: no spurious oscillations are observed and the shock is well resolved. Finally, the difference between the inlet and outlet mass flow rates is plotted in Fig. 9d and shows that a steady state has indeed been reached.

44

The results presented in this paper demonstrate the ability of the entropy viscosity method with the new definitions of the viscosity coefficients to correctly simulate several types of flows (from very low Mach subsonic to transonic flows) without tuning parameters.

7. Conclusions

A new version of the entropy viscosity method that is valid for a wide range of Mach numbers has been derived and presented for the inviscid Euler equations. The definition of the viscosity coefficients is now consistent with the low-Mach asymptotic limit, does not require an analytical expression for the entropy function, and is therefore applicable to a larger variety of flow regimes, from very low-Mach flows to supersonic flows. The method has also been extended to Euler equation with variable area to solve nozzle flow problems. In 1-D, convergence of the numerical solution to the exact solution was demonstrated by computing the convergence rates of the L1 and L2 norms for flows in a converging-diverging nozzle and in straight pipes. For smooth solutions, second-order convergence was verified; solutions with shocks converged with the expected theoretical rates of 1 (L_1-norm) and 0.5 (L_2-norm).

The effectiveness of the method was also demonstrated in 2-D using a series of benchmark problems for both subsonic and supersonic flows in various geometries, with Mach numbers ranging from 10^{-7} to 2.5. For very low-Mach flows, we numerically verified that the spatial steady-state pressure variations were proportional to the square of the Mach number, as expected in the incompressible limit.

In the future, we plan to further extend the entropy viscosity method to the seven-equation two-phase flow fluid model [20]. This two-phase flow system of equations is a good candidate for two reasons: it is unconditionally hyperbolic

45

and degenerates to the standard Euler equations when one phase disappears.

Acknowledgments

References

[1] E. F. Toro, Riemann Solvers and numerical methods for fluid dynamics, 2^{nd} Edition, Springer, 1999.

[2] B. Cockburn, C. Johnson, C. Shu, E. Tadmor, Advanced numerical approximation of nonlinear hyperbolic equations, Lecture Notes in Mathematics 1697.

[3] B. Cockburn, G. Karniadakis, C. Shu, Discontinuous galerkin methods: theory, computation and applications, Lecture Notes in Computer Science and Engineering 11.

[4] R. Lohner, Applied CFD Techniques: an Introduction based on Finite Element Methods, 2^{nd} Edition Wiley, 2003.

[5] A. Lapidus, A detached shock calculation by second order finite differences, J. Comput. Phys. 2 (1967) 154–177.

[6] R. Lohner, K. Morgan, J. Peraire, A simple extension to multidimensional problems of the artificial viscosity due to lapidus, Commun. Numer. Methods Eng. 1(14) (1985) 141–147.

[7] J. Donea, A. Huerta, Finite Element Methods for Flow Problems, Oxford University Press, 2003.

[8] J. L. Guermond, R. Pasquetti, Entropy viscosity method for nonlinear conservation laws, Journal of Comput. Phys 230 (2011) 4248–4267.

[9] J. L. Guermond, R. Pasquetti, Entropy viscosity method for high-order approximations of conservation laws, Lecture Notes in Computational Science and Engineering 76 (2011) 411–418.

[10] H. Guillard, C. Viozat, On the behavior of upwind schemes in the low mach number limit, Computers & Fluids 28 (1999) 63–86.

[11] E. Turkel, Preconditioned techniques in computational fluid dynamics, Annu. Rev. Fluid Mech. 31 (1999) 385–416.

[12] J. S. W. D. L, Darmofal, J. Peraire, The solution of the compressible euler equations at low mach numbers using a stabilized finite element algorithm, Comput. Methods Appl. Mech. Engrg. 190 (2001) 5719–5737.

[13] X.-S. Li, C.-W. Gu, An all-speed roe-type scheme and its asymptotic analysis of low mach number behavior, Journal of Computational Physics 227 (2008) 5144–5159.

[14] D. Gaston, C. Newsman, G. Hansen, D. Lebrun-Grandie, A parallel computational framework for coupled systems of nonlinear equations, Nucl. Eng. Design 239 (2009) 1768–1778.

[15] J. L. Guermond, B. Popov, Viscous regularization of the euler equations and entropy principles, under review.

[16] J. D. Anderson, Modern compressible flow, in: Guide for Verification and Validation in Computational Solid Mechanic., New York, 1982, pp. 10–2006.

47

[17] J. L. Guermond, R. Pasquetti, Entropy-based nonlinear viscosity for fourier approximations of conservation laws, in: C.R. Math. Acad. Sci., Vol. 326, Paris, 2008, pp. 801–806.

[18] V. Zingan, J. L. Guermond, J. Morel, B. Popov, Implementation of the entropy viscosity method with the discontinuous galerkin method, Journal of Comput. Phys 253 (2013) 479–490.

[19] B. Muller, Low-mach number asymptotes of the navier-stokes equations, Journal of Engineering Mathematics 34 (1998) 97–109.

[20] R. Berry, R. Saurel, O. LeMetayer, The discrete equation method (dem) for fully compressible, two-phase flows in ducts of spatially varying cross-section, Nuclear Engineering and Design 240 (2010) 3797–3818.

[21] R. Loubere, Validation test case suite for compressible hydrodynamics computation, Theoritical Division T-7 Los Alamos National Laboratory.

[22] J. J. Quirk, A contribution to the great riemann solver debate, NASA Contractor Report 191409 ICASE Report No. (1992) 92–64.

[23] R. Abgrall, R. Saurel, Discrete equations for physical and numerical compressible multiphase mixtures, Journal of Computational Physics 186 (2003) 361–396.

[24] D. L. Darmofal, K. Siu, A robust multigrid algorithm for the euler equations with local preconditioning and semi-coarsening, Journal of Computational Physics 151 (1999) 728–756.

[25] P. Perrot, A to Z of Thermodynamics, Oxford University Press, 1998.

[26] O. LeMetayer, J. Massoni, R. Saurel, Elaborating equation of state for a liquid and its vapor for two-phase flow models, International Journal of Thermal Science 43 (2004) 265–276.

[27] S. LeMartelot, B. Nkonga, R. Saurel, Liquid and liquid-gas flows at all speeds., Journal of Computational Physics 255 (2013) 53–82.

[28] R. A. DeVore, G. G. Lorentz, Constructive Approximation, Springer-Verlag, 1991.

[29] T. W. Roberts, The behavior of flux difference splitting schemes near slowly moving shock waves, Journal of Computational Physics 90 (1990) 141–160.

[30] L. R. J., Numerical methods for conservation laws, Basel: Birhauser, Reading, Massachusetts, 1990.

A. Derivation of the entropy residual as a function of density, pressure, and speed of sound

The entropy residual is defined as follows:

$$R_{\mathrm{ent}}(\vec{r}, t) = \partial_t s(\vec{r}, t) + \vec{u} \cdot \vec{\nabla} s(\vec{r}, t),$$

where all variables were defined previously. This form of the entropy residual is not suitable for the low-Mach limit as explained in Section 2.1. In this appendix, we recast the entropy residual $R_{\mathrm{ent}}(\vec{r}, t)$ as a function of the primitive variables (pressure, velocity and density) and the speed of sound. The first step of this derivation is to use the chain rule, recalling that the entropy is a function of the internal energy e and the density ρ, yielding

$$R_{\mathrm{ent}}(\vec{r}, t) = s_e \frac{\mathrm{D}e}{\mathrm{D}t} + s_\rho \frac{\mathrm{D}\rho}{\mathrm{D}t} \, , .$$

where s_e denotes the partial derivative of s with respect to the variable e. We recall that $\frac{\mathrm{D}}{\mathrm{D}t}$ denotes the material derivative. Since the internal energy e is a function of pressure P and density ρ (through the equation of state), we use again the chain rule to re-express the previous equation as a function of the material derivatives in P and ρ:

$$
\begin{aligned}
R_{\mathrm{ent}}(\vec{r}, t) &= s_e e_P \frac{\mathrm{D}P}{\mathrm{D}t} + (s_e e_\rho + s_\rho) \frac{\mathrm{D}\rho}{\mathrm{D}t} \\
&= s_e e_P \left(\frac{\mathrm{D}P}{\mathrm{D}t} + \frac{1}{s_e e_P} (s_e e_\rho + s_\rho) \frac{\mathrm{D}\rho}{\mathrm{D}t} \right) \\
&= s_e e_P \left(\frac{\mathrm{D}P}{\mathrm{D}t} + (\frac{e_\rho}{e_P} + \frac{s_\rho}{s_e e_P}) \frac{\mathrm{D}\rho}{\mathrm{D}t} \right) \, .
\end{aligned}
$$

To prove that the term multiplying the material derivative of the density is indeed equal to the square of the speed of sound, we recall that the speed of sound is defined as the partial derivative of pressure with respect to density at

50

constant entropy, which can be recast as a function of the entropy as follows (see Appendix A.2 of [15]):

$$c^2 := \left.\frac{\partial P}{\partial \rho}\right|_{s=cst} = P_\rho - \frac{s_\rho}{s_e}P_e .$$

Using the following relations (see Appendix A.1 of [15])

$$P_e = \frac{1}{e_P} \text{ and } P_\rho = -\frac{e_\rho}{e_P} .$$

Substitution of these expressions into the entropy residual equation above gives Eq. (9), which is recalled below for completeness:

$$R_{\text{ent}}(\vec{r}, t) := \partial_t s + \vec{u} \cdot \vec{\nabla} s = \frac{\mathrm{D}s}{\mathrm{D}t} = \frac{s_e}{P_e}\left(\underbrace{\frac{\mathrm{D}P}{\mathrm{D}t} - c^2 \frac{\mathrm{D}\rho}{\mathrm{D}t}}_{\widetilde{R}_{\text{ent}}(\vec{r},t)}\right) .$$

B. Derivation of the dissipative terms for the Euler equations with variable area using the entropy minimum principle

The Euler equations (without viscous regularization) with variable area are recalled here

$$\partial_t\left(\rho A\right) + \vec{\nabla}\cdot(\rho\vec{u}A) = 0 \tag{43a}$$

$$\partial_t\left(\rho\vec{u}A\right) + \vec{\nabla}\cdot[A\left(\rho\vec{u}\otimes\vec{u} + P\mathbb{I}\right)] = P\vec{\nabla}A \tag{43b}$$

$$\partial_t\left(\rho EA\right) + \vec{\nabla}\cdot[\vec{u}A\left(\rho E + P\right)] = 0\,. \tag{43c}$$

The specific entropy is a function of the density ρ and the internal energy e, i.e., $s(e,\rho)$. The above system of equations satisfies the minimum entropy principle [30],

$$A\rho\left(\partial_t s + \vec{u}\cdot\vec{\nabla}\cdot s\right) \geq 0\,. \tag{44}$$

The entropy function s satisfies the second law of thermodynamics, $Tds = de - \frac{P}{\rho^2}d\rho$, which implies $s_e := T^{-1}$ and $s_\rho := -PT^{-1}\rho^{-2}$. One can show that [15]

$$s_e = T^{-1} \geq 0 \text{ and } Ps_e + \rho^2 s_\rho = 0\,. \tag{45}$$

In order to apply the entropy viscosity method to the variable-area Euler equations, dissipative terms need to be added to each equation in Eq. (43). The functional forms of these terms need to be such that the entropy residual derived with these terms present also satisfies the minimum entropy principle. To prove the minimum entropy principle, the extra terms appearing in the entropy residual are either recast as conservative terms or shown to be positive. The rest of this appendix presents this demonstration. Following [15], we first write the variable-area equations with dissipative terms:

$$\partial_t\left(\rho A\right) + \vec{\nabla}\cdot(\rho\vec{u}A) = \vec{\nabla}\cdot f \tag{46a}$$

52

$$\partial_t \left(\rho \vec{u} A \right) + \vec{\nabla} \cdot [A \left(\rho \vec{u} \otimes \vec{u} + P \mathbb{I} \right)] = P \vec{\nabla} A + \vec{\nabla} \cdot g \qquad \text{(46b)}$$

$$\partial_t \left(\rho E A \right) + \vec{\nabla} \cdot [\vec{u} A \left(\rho E + P \right)] = \vec{\nabla} \cdot \left(h + \vec{u} \cdot g \right). \qquad \text{(46c)}$$

where f, g and h are dissipative fluxes to be determined. Starting from the modified system of equations given in Eq. (46), the entropy residual is derived again. The derivation requires the following steps : express the governing laws in terms of primitive variables $(\rho, \vec{u}, e)$, multiply the continuity equation by ρs_ρ and the internal energy equation by s_e, and invoke multivariate chain rule, e.g., $\partial s / \partial x = s_e \partial e / \partial x + s_\rho \partial \rho / \partial x$. These steps are similar to those used for the standard Euler equations [15]. Some of the lengthy algebra is omitted here. The above steps yield:

$$A \rho \left(\partial_t s + \vec{u} \cdot \vec{\nabla} s \right) = s_e \left[\vec{\nabla} \cdot h + g : \vec{\nabla} u + \left(\frac{u^2}{2} - e \right) \vec{\nabla} \cdot f \right] + \rho s_\rho \vec{\nabla} \cdot f. \qquad \text{(47)}$$

The next step consists of choosing a definition for each of the dissipative terms so that the left hand-side is positive. The right hand-side of Eq. (47) can be simplified using the relations $g = A \mu \vec{\nabla}^s \vec{u} + f \otimes \vec{u}$ and $h = \tilde{h} - 0.5 ||\vec{u}||^2 f$ to give

$$A \rho \left(\partial_t s + \vec{u} \cdot \vec{\nabla} \cdot s \right) = s_e \left[\vec{\nabla} \cdot \tilde{h} - e \vec{\nabla} \cdot f \right] + \rho s_\rho \vec{\nabla} \cdot f + A s_e \mu \vec{\nabla} \vec{u}^s : \vec{\nabla} \vec{u}. \qquad \text{(48)}$$

The right hand-side is now integrated by parts:

$$A \rho \left(\partial_t s + \vec{u} \cdot \vec{\nabla} \cdot s \right) = \vec{\nabla} \cdot \left[s_e \tilde{h} - s_e e f + \rho s_\rho f \right]$$
$$- \vec{\nabla} \cdot \tilde{h} \vec{\nabla} s_e + f \cdot \vec{\nabla} (e s_e) - f \cdot \vec{\nabla} (\rho s_\rho) + A s_e \mu \vec{\nabla}^s \vec{u} : \vec{\nabla} \vec{u} \qquad \text{(49)}$$

where $\vec{\nabla}^s$ is the symmetric gradient. The term $A s_e \mu \vec{\nabla}^s \vec{u} : \vec{\nabla} \vec{u}$ is positive and thus, does not need any further modification. It remains to treat the other

terms of the right hand-side that we now call rhs:

$$rhs = \vec{\nabla} \cdot \left[s_e \tilde{h} - s_e ef + \rho s_\rho f \right] - \tilde{h} \cdot \vec{\nabla} s_e + f \cdot \vec{\nabla}(es_e) - f \cdot \vec{\nabla}(\rho s_\rho).$$

The first term in rhs is a conservative term. By carefully choosing a definition for $\tilde{h}$ and f, the conservative term can be expressed as a function of the entropy s. The inclusion of the variable area in the choice of the dissipative terms is also required so that, when assuming constant area, the standard Euler equations are recovered. The following definitions for $\tilde{h}$ and f are chosen:

$$\tilde{h} = A\kappa \vec{\nabla}(\rho e) \text{ and } f = A\kappa \vec{\nabla}\rho,$$

which yields, using the chain rule,

$$rhs = \vec{\nabla} \cdot (\rho A \kappa \vec{\nabla} s) - A\kappa \underbrace{\left[\vec{\nabla}(\rho e) \vec{\nabla} s_e - \vec{\nabla}\rho \vec{\nabla}(es_e) + \vec{\nabla}\rho \vec{\nabla}(\rho s_\rho) \right]}_{\mathbf{Q}}$$

It remains to treat the term $\mathbf{Q}$ that can be recast under a quadratic form. Following [15], one obtain:

$$\mathbf{Q} = \rho X^t \Sigma X$$

$$\text{with } X = \begin{bmatrix} \vec{\nabla}\rho \\ \vec{\nabla}e \end{bmatrix} \text{ and } \Sigma = \begin{bmatrix} \rho^{-2}\partial_\rho(\rho^2 \partial_\rho s) & \partial_{\rho,e} s \\ \partial_{\rho,e} s & \partial_{e,e} s \end{bmatrix}$$

The matrix Σ is symmetric and identical to the matrix obtained in [15]. The sign of the quadratic form can be simply determined by studying the positiveness of the matrix Σ. In this particular case, it is required to prove that the matrix is negative definite: the quadratic form is on the right hand-side and is preceded by a negative sign. According to [15], the convexity of the opposite of the entropy

54

870 function, i..e, $-s$, with respect to the internal energy e and the specific volume

871 $1/\rho$ is sufficient to ensure that the matrix Σ is negative definite.

872 Thus, the right hand-side of the entropy residual Eq. (47) is now either recast

873 as conservative terms, or known to be positive. Thus, the entropy minimum

874 principle holds.

C. Entropy residual for isentropic flows

This appendix shows that the entropy residual is zero for isentropic flows. For convenience, we recall here the entropy residual as a function of the pressure, density, velocity, and speed of sound:

$$\widetilde{R}_{\text{ent}} = \frac{\mathrm{D}P}{\mathrm{D}t} - c^2 \frac{\mathrm{D}\rho}{\mathrm{D}t} \,. \tag{50}$$

Assuming an isentropic flow, pressure is only a function of density, i.e., $P = f(\rho)$ or equivalently $\rho = f^{-1}(P)$. Using the definition of the speed of sound $c^2 = \frac{\partial P}{\partial \rho}\big)_s$ and the above form of the equation of state, we have

$$c^2 = \frac{\partial P}{\partial \rho}\bigg)_s = \frac{dP}{d\rho} = \frac{df(\rho)}{d\rho} \,. \tag{51}$$

Using the chain rule, the entropy residual in Eq. (50) can be recast as follows and proven equal to zero:

$$\widetilde{R}_{\text{ent}} = \frac{df(\rho)}{d\rho}\frac{\mathrm{D}\rho}{\mathrm{D}t} - c^2\frac{\mathrm{D}\rho}{\mathrm{D}t} = c^2\frac{\mathrm{D}\rho}{\mathrm{D}t} - c^2\frac{\mathrm{D}\rho}{\mathrm{D}t} = 0 \,. \tag{52}$$