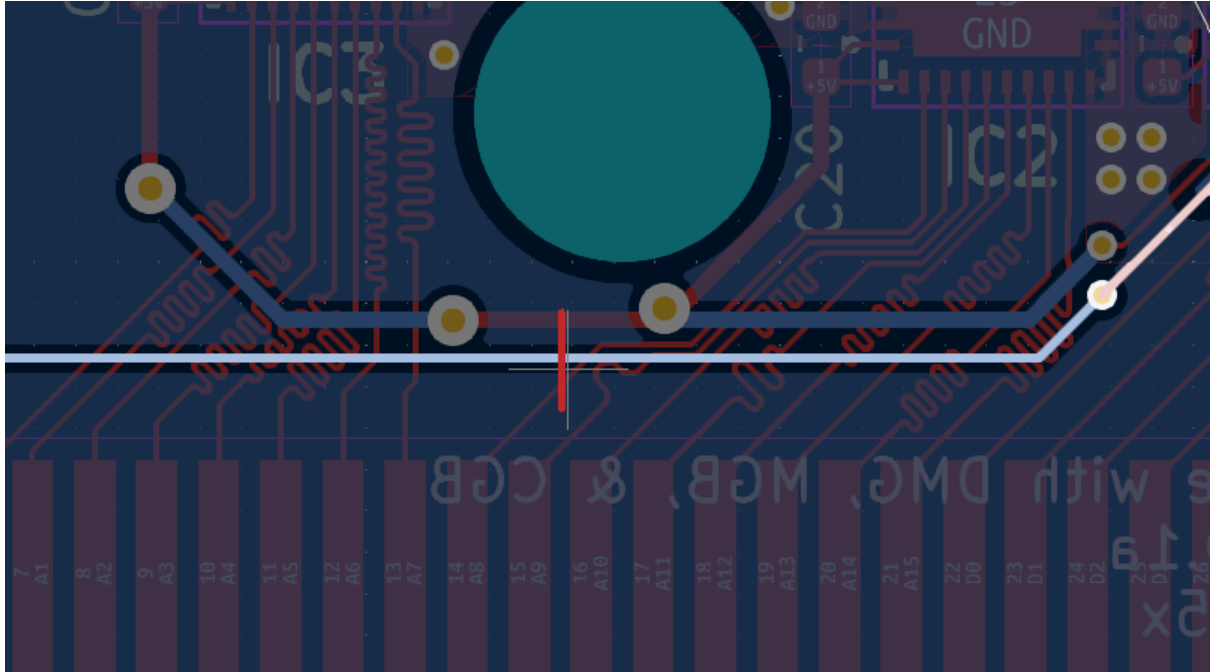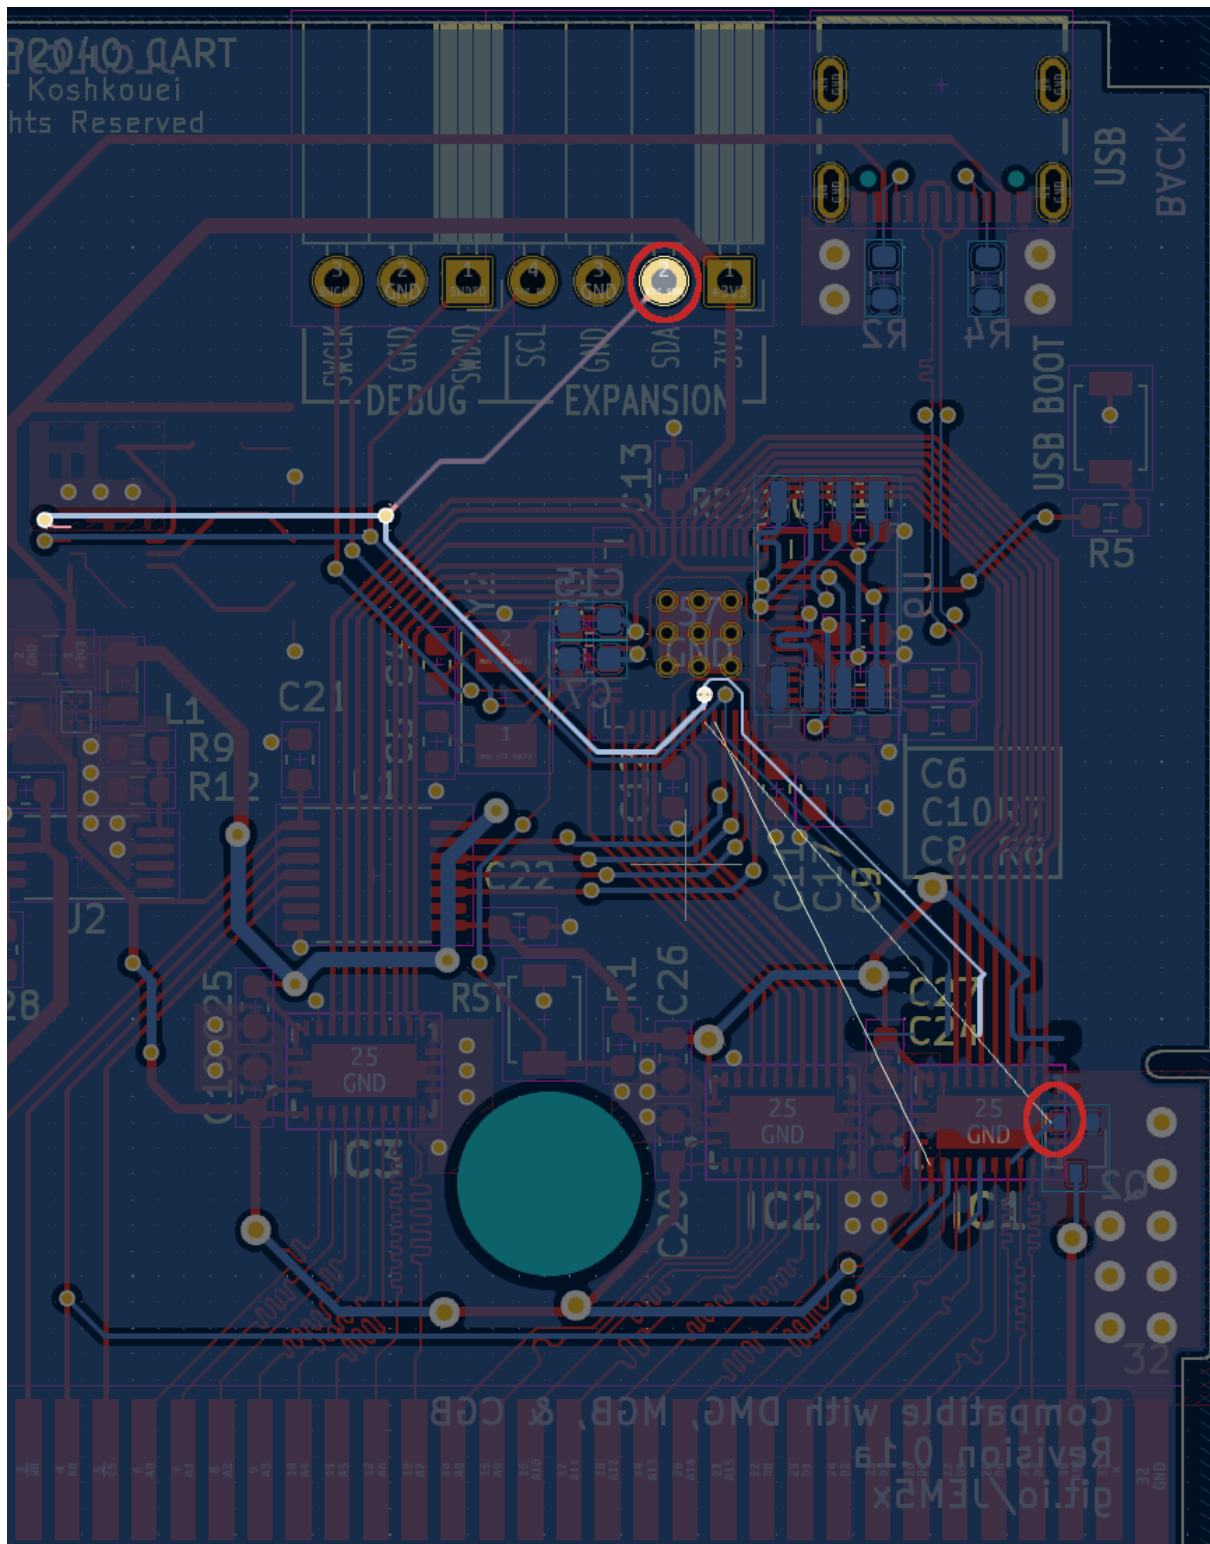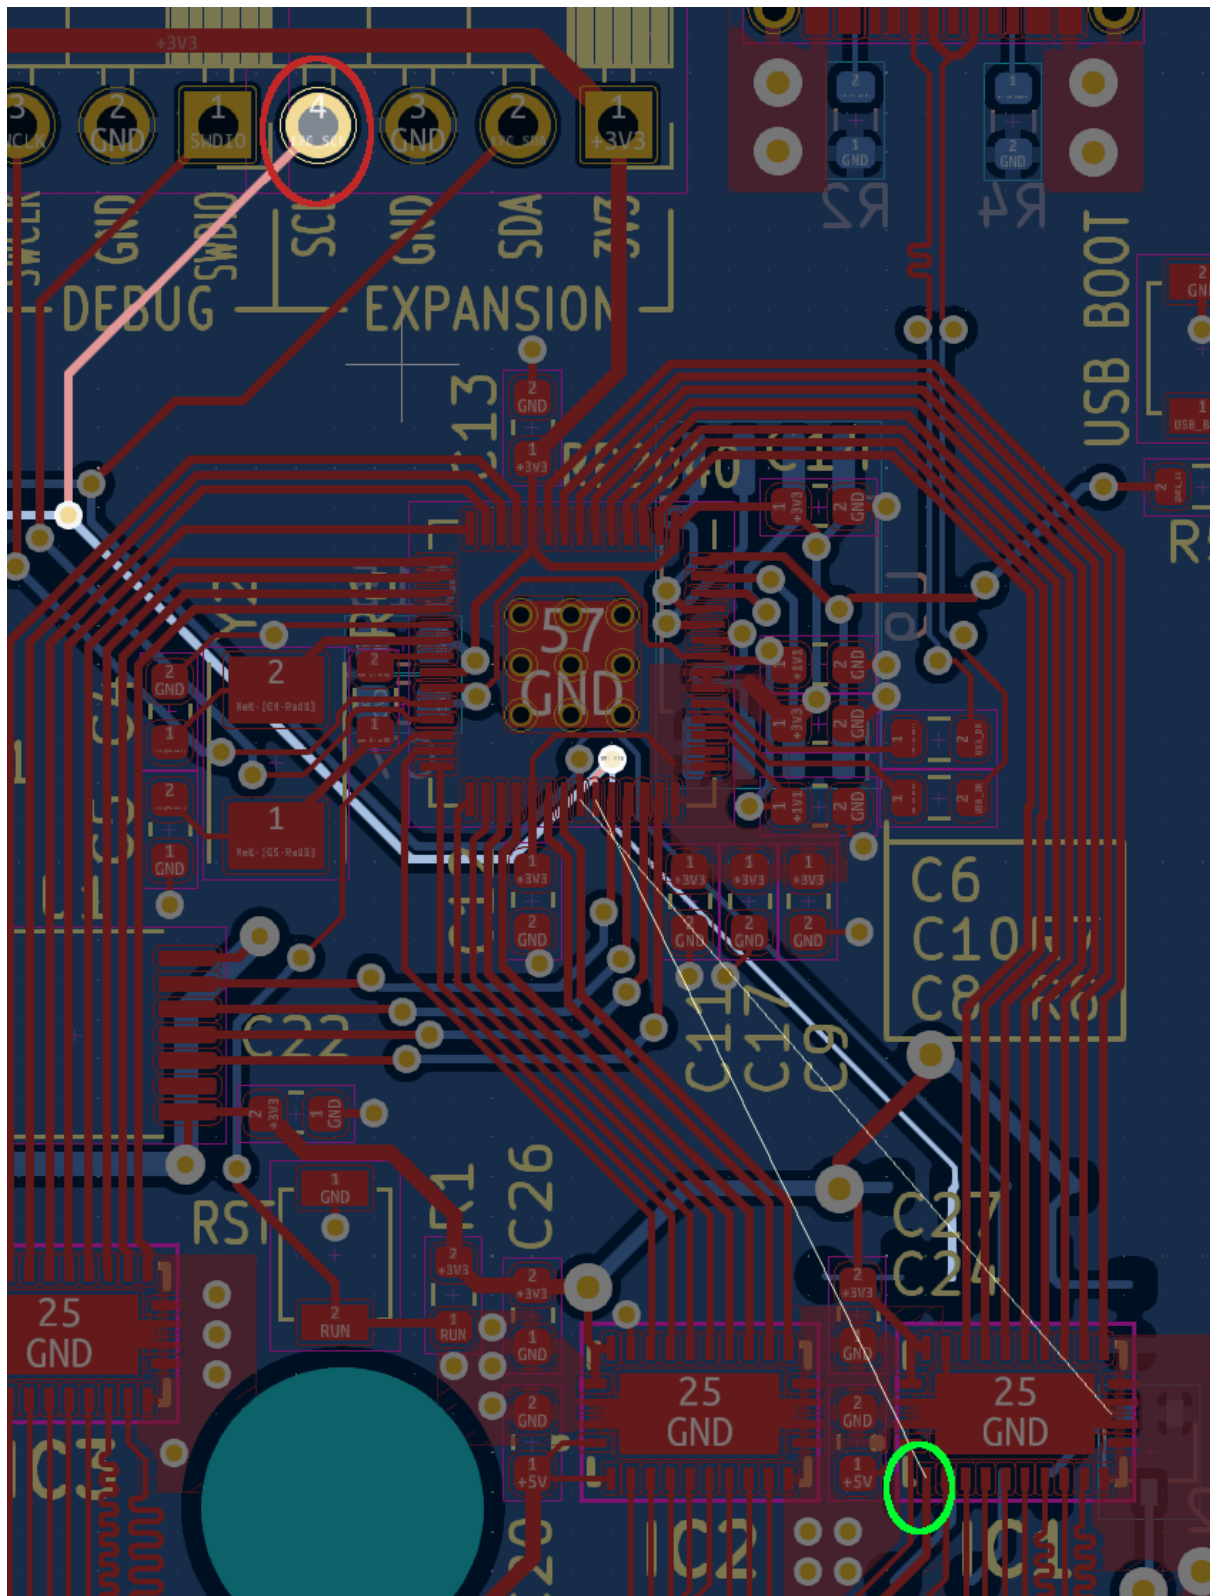# Fix Data Bus control on 0.1.0 gb_rp2040_cart

Cut this /RD track on the back of the PCB. Then choose one of the following sections.
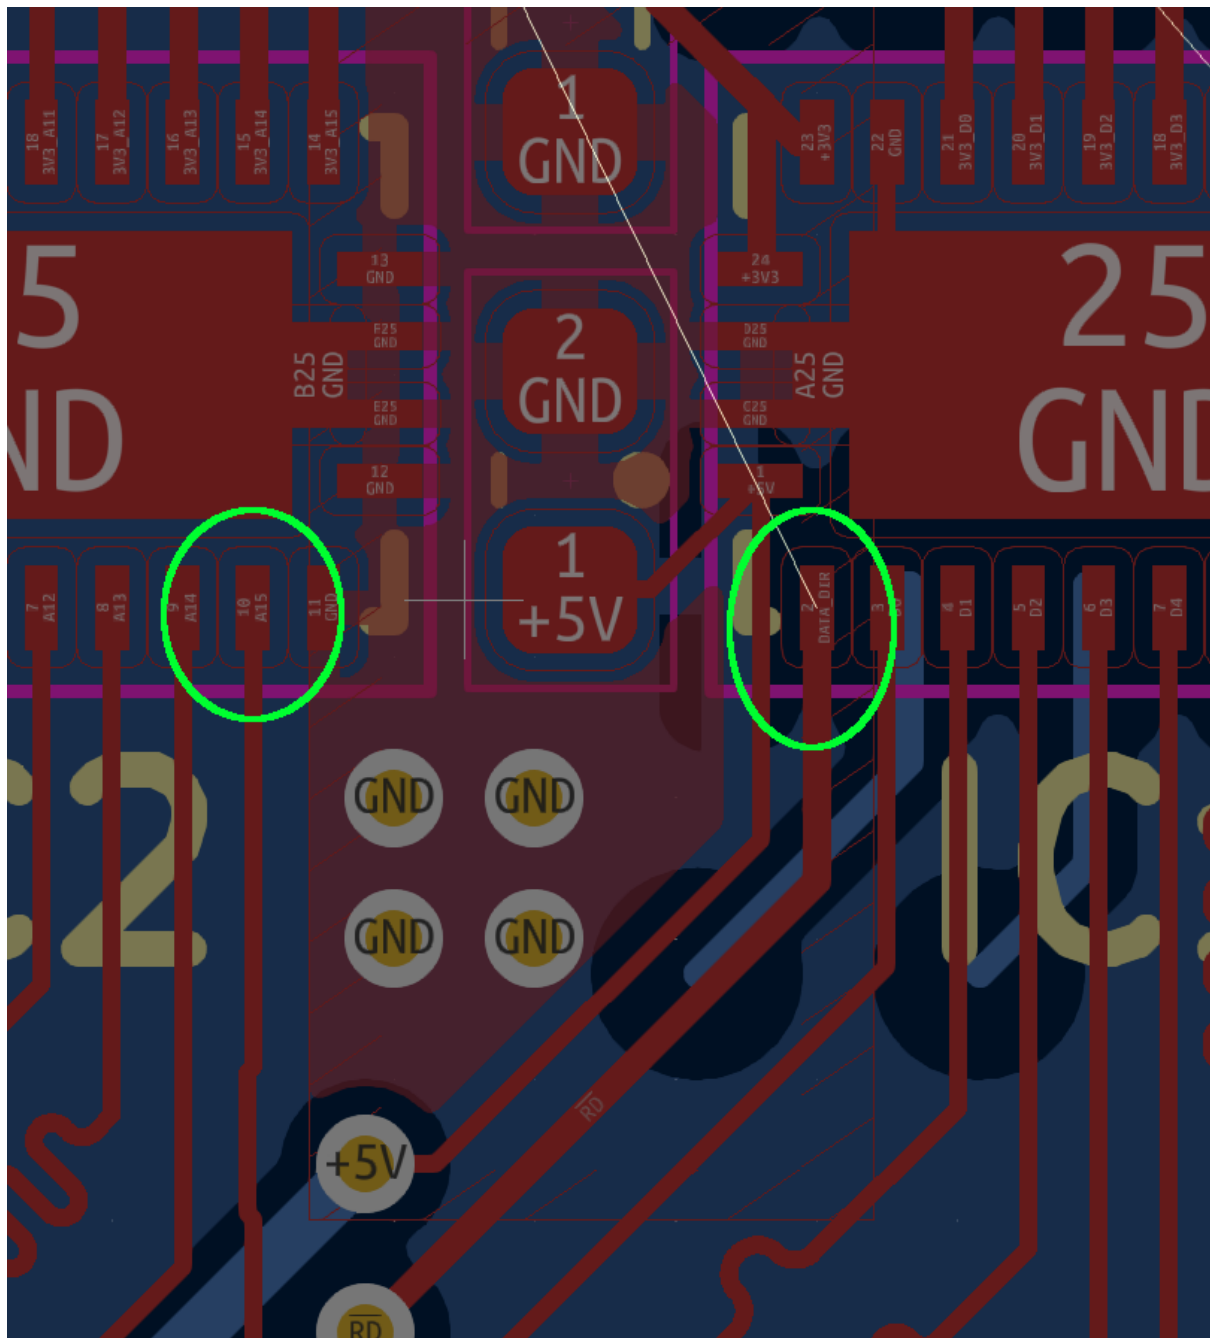
For Dynamic Data Bus Direction Control

Connect these two pins with wire. This connects the now unused I2C_SDA line to RESET_GB.

Connect these two pins with wire. This connects the now unused I2C_SCL line to DATA_DIR.

For ROM-Only Game Support

You may instead short A15 and DATA_DIR pads.