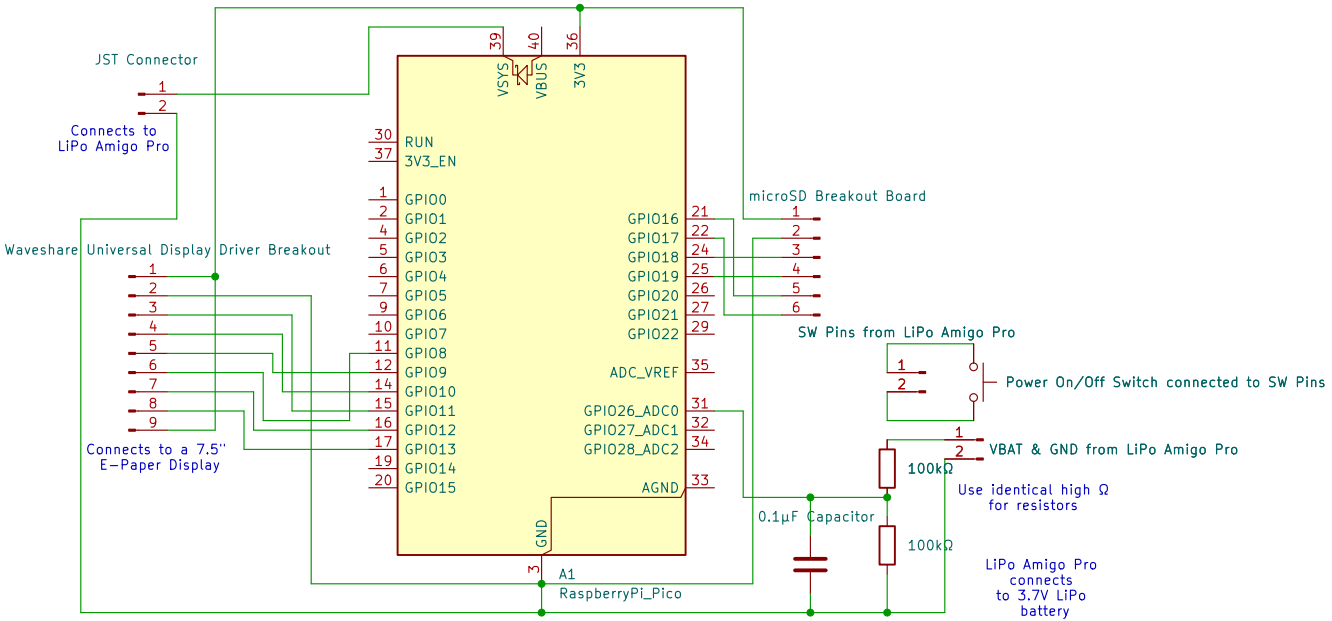


The battery can be recharged using USB-C from the Amigo Breakout Board.
Any low capacitance should be used.
Any Ω can technically be used for the resistors but must be identical and should be high.
The final schematic of my EBook Reader.

**Julio Anandaraaj**

Sheet: /
File: EPaperReader.kicad_sch

***Title: E-Paper Book Reader***

| Size: User | Date: 2026-07-05 | **Rev: 1** |
|---|---|---|
| KiCad E.D.A. 10.0.4 | | Id: 1/1 |