


Actual-size screw key

Print at 100% (actual size). Turn off Fit, Shrink and Scale to page.

Check the 50 mm ruler and the 20 × 20 mm square with a real ruler before use.

Measure from the middle of the printed lines. A screen is not a size reference.

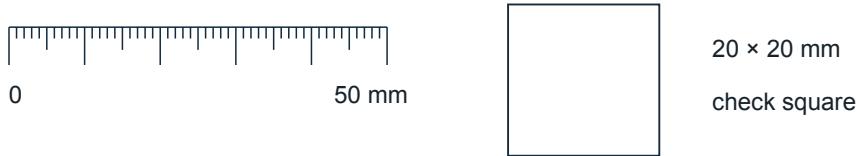

Lay each screw on its drawing with the underside of the head on the start line.

The length doesn't include the head. Outlines show the largest head that fits:

M2 heads up to 3.8 mm across and 2 mm tall; M3 socket heads up to 5.5 mm across and 3 mm tall.

M2 × 6 · 16 used		M3 × 6 · 7 used	
M2 × 8 · 9 used		M3 × 8 · 7 used	
M2 × 10 · 8 used		M3 × 10 · 2 used	
M2 × 12 · 4 used		M3 × 12 · 30 used	
Three of the 9 M2 × 8 are button heads (drawn: 3.5 × 1.3 mm). They fix the head to its shelf, without washers. M3 × 10 countersunk · 3 used Length 10 mm including the head; 90° head, 6 mm across.		M3 × 14 · 2 used	
Nuts, seen from above (ordinary hex nuts) M2 nuts · 37 used M3 nuts · 62 used		M3 × 16 · 7 used	
		M3 × 18 · 2 used	
		M3 × 20 · 2 used	

Servo center screws · 3

These come with the servos and aren't drawn here.

Keep each one with its servo horn.

Don't use M2 screws in their place.

Washers: inside and outside diameter



M2 metal: 4, 0.25 mm thick

M3: 8, 0.53 mm thick

M2 nuts are 4 mm across the flats and 1.6 mm thick.