

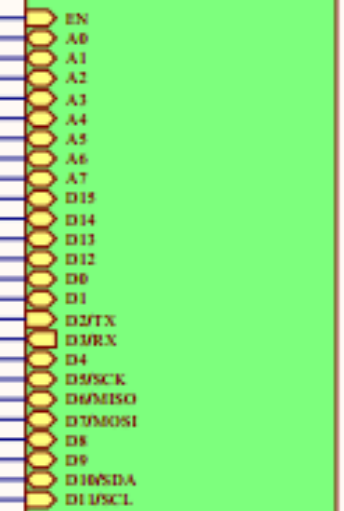


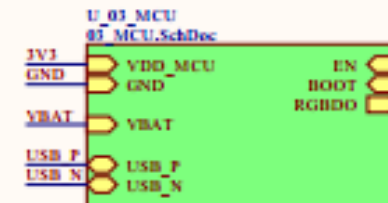


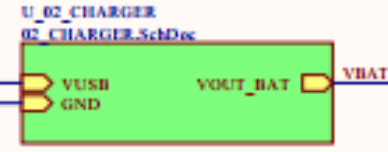

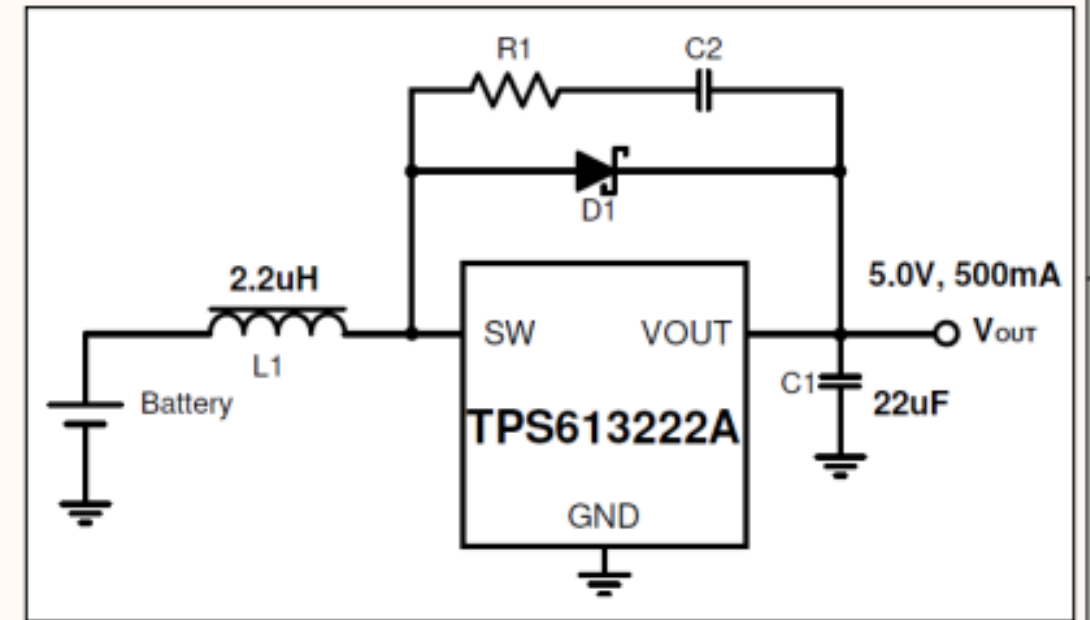
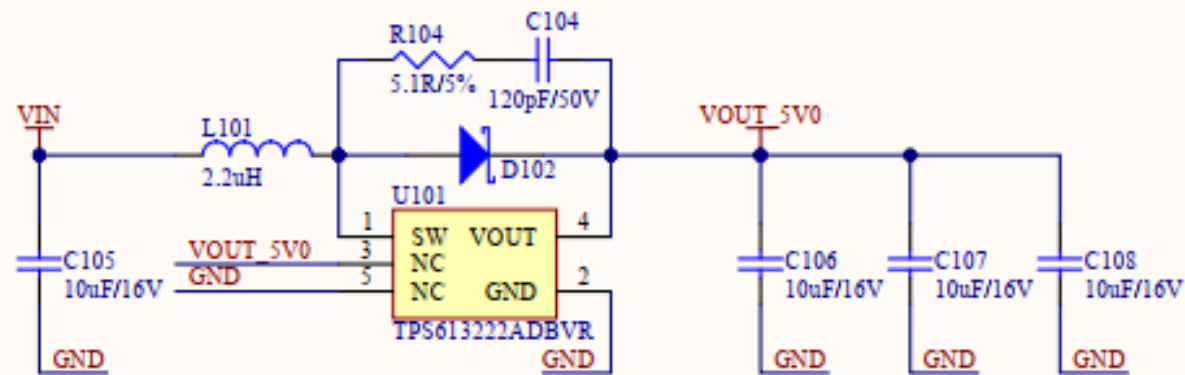


Deneyap Kart v2
00_Ana Şematik


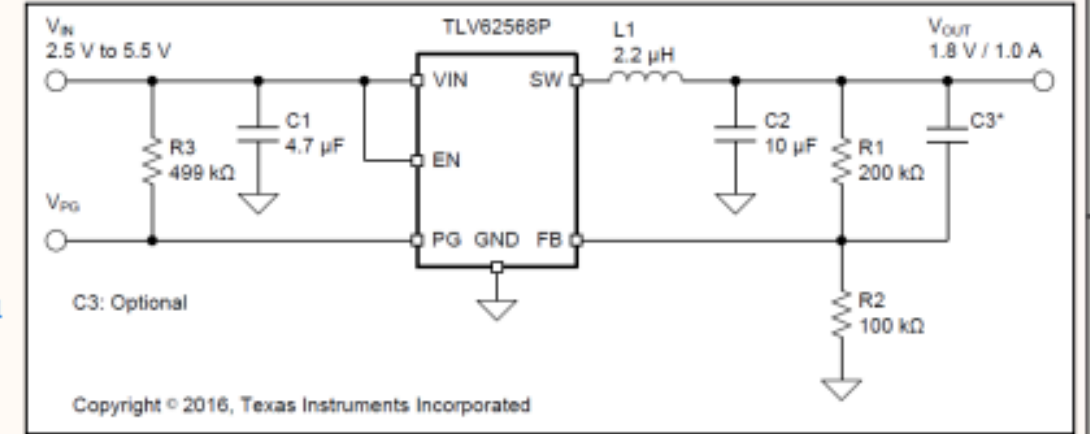


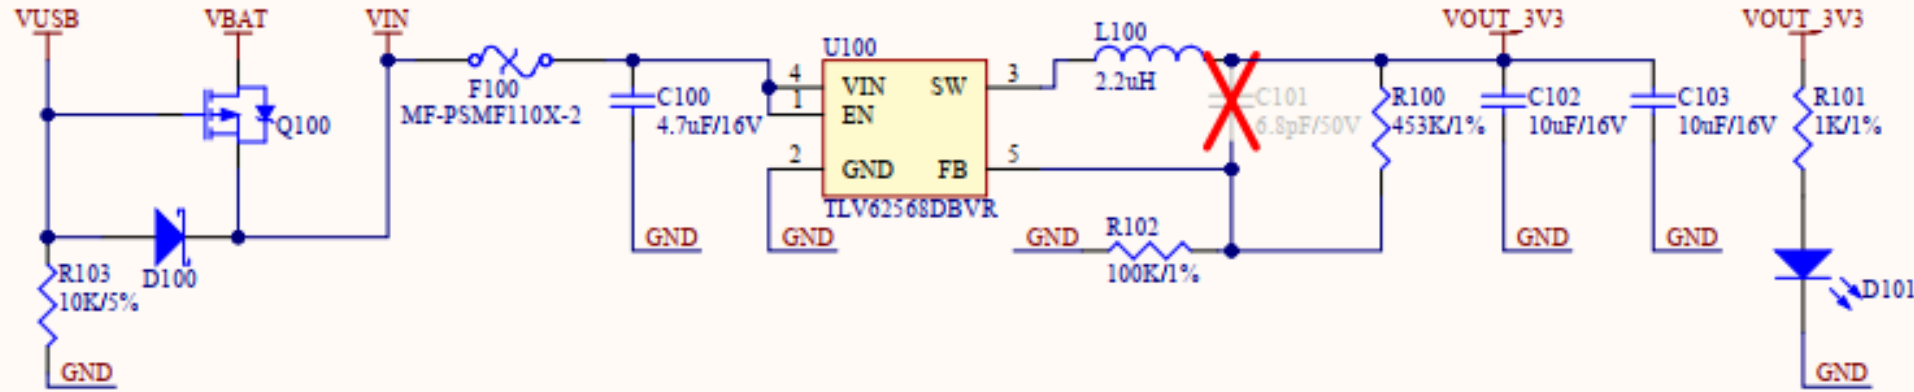

VUSB	VUSB
VBAT	VBAT
RTN	GND
VOUT_3V3	VOUT_3V3
VOUT_5V0	VOUT_5V0
GND	GND

Deneyap Kart v2
01_Güç



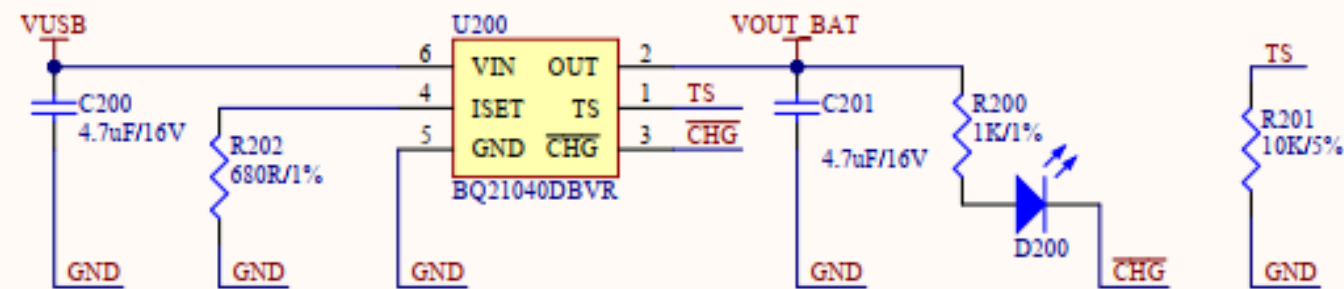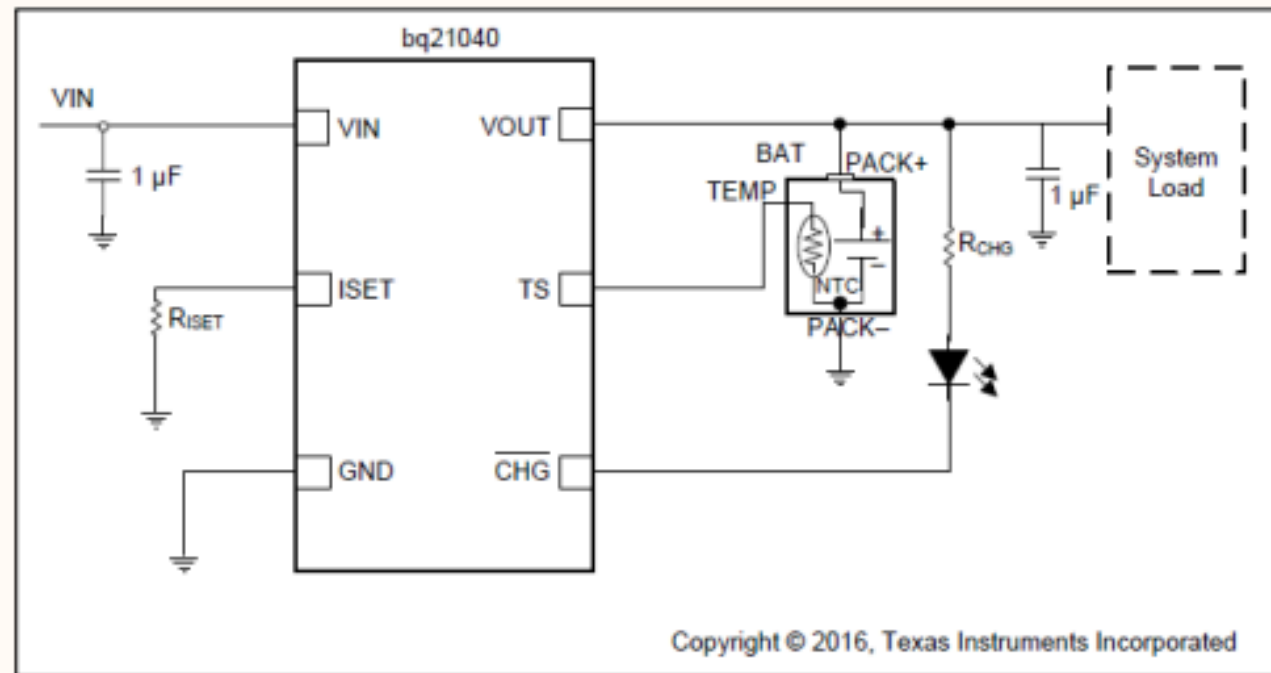

VDD_MCU	3V3
VBAT	VBAT
GND	GND
USB_P	USB_P
USB_N	USB_N

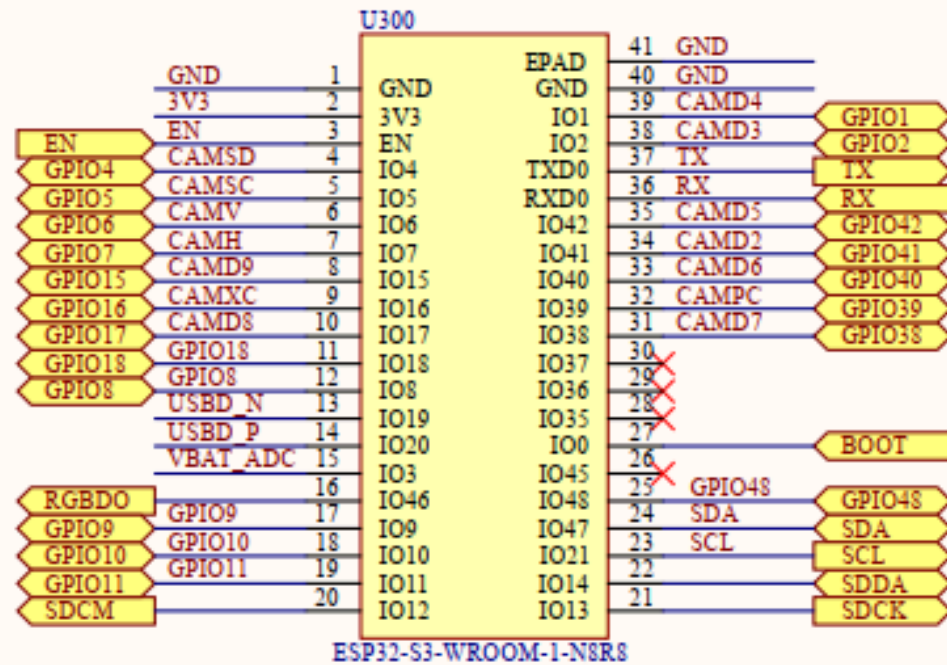


Table 4: Default Configuration of Strapping Pins

Strapping Pin	Default Configuration	Bit Value
GPIO0	Weak pull-up	1
GPIO3	Floating	-
GPIO45	Weak pull-down	0
GPIO46	Weak pull-down	0

Table 6: Chip Boot Mode Control


Boot Mode	GPIO0	GPIO46
SPI Boot	1	Any value
Joint Download Boot ²	0	0


Table 7: VDD_SPI Voltage Control


VDD_SPI power source ²	Voltage	EFUSE_VDD_SPI_FORCE	GPIO45	EFUSE_VDD_SPI_TIEH
VDD3P3_RTC via R _{SP1}	3.3 V	0	0	Ignored
Flash Voltage Regulator	1.8 V		1	Ignored
Flash Voltage Regulator	1.8 V	1	Ignored	0
VDD3P3_RTC via R _{SP1}	3.3 V		Ignored	1



Table 8: JTAG Signal Source Control


JTAG Signal Source	EFUSE_DIS_PAD_JTAG	EFUSE_DIS_USB_JTAG	EFUSE_STRAP_JTAG_SEL	GPIO3
USB Serial/JTAG Controller	0	0	0	Ignored
	0	0	1	1
	1	0	Ignored	Ignored
JTAG pins ²	0	0	1	0
	0	1	Ignored	Ignored
JTAG is disabled	1	1	Ignored	Ignored

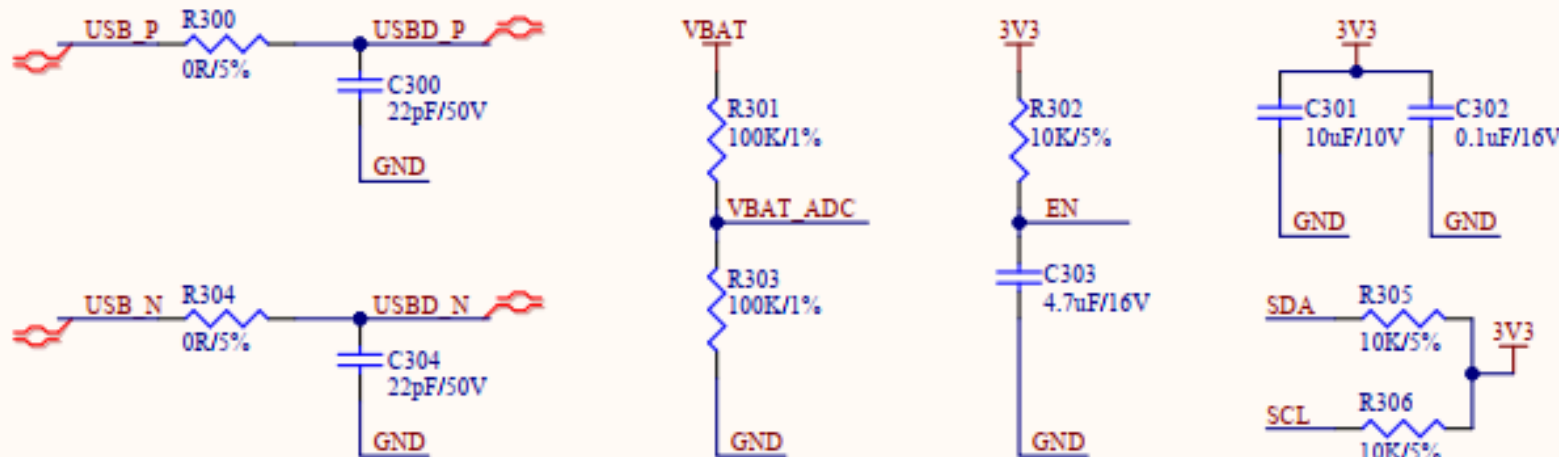

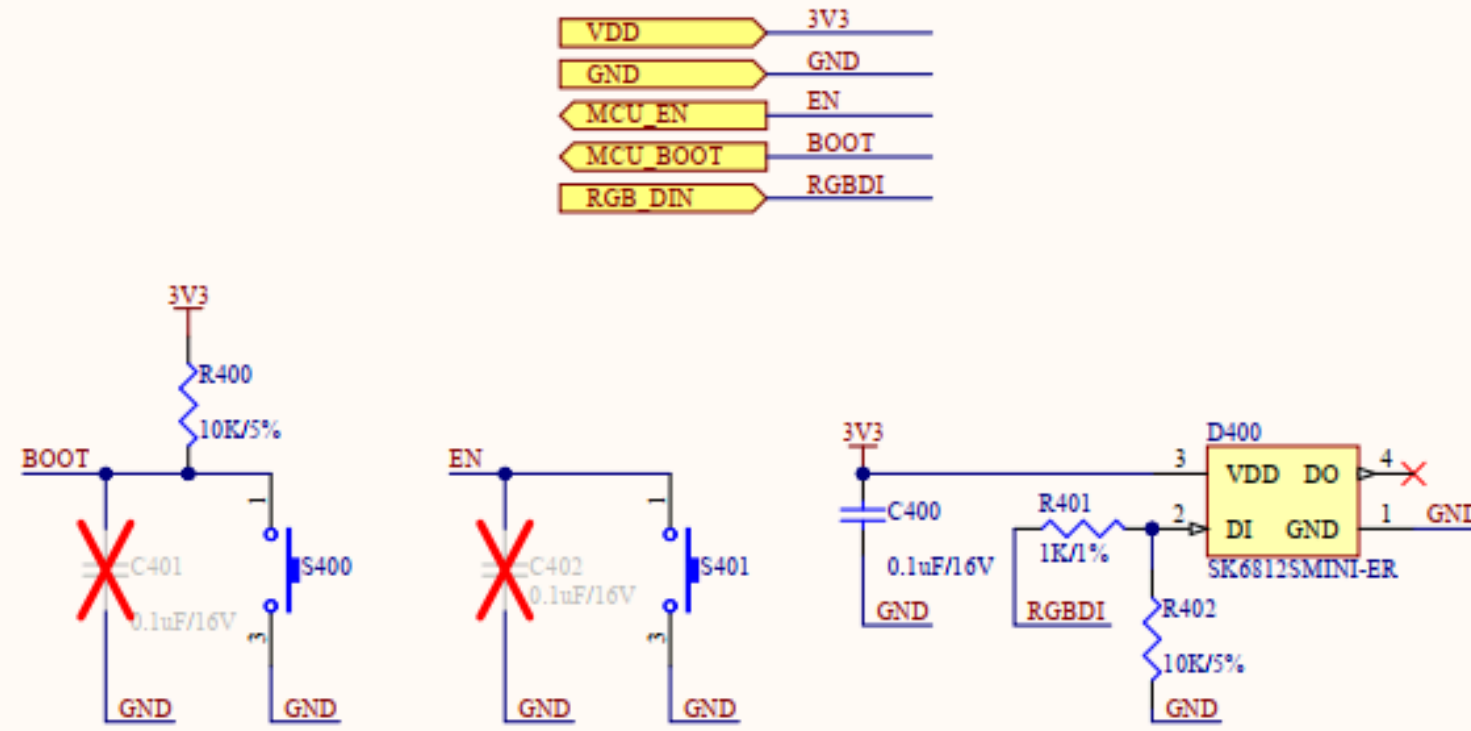

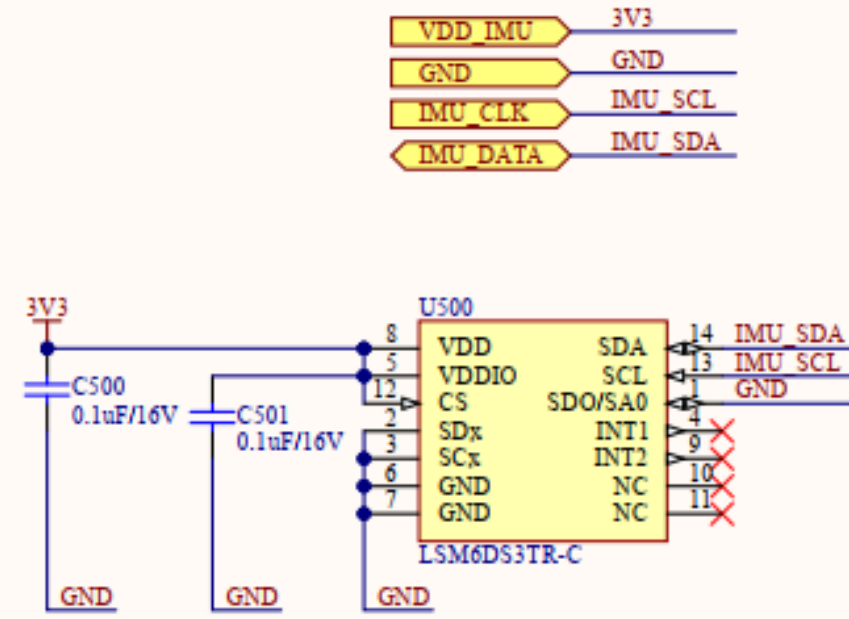

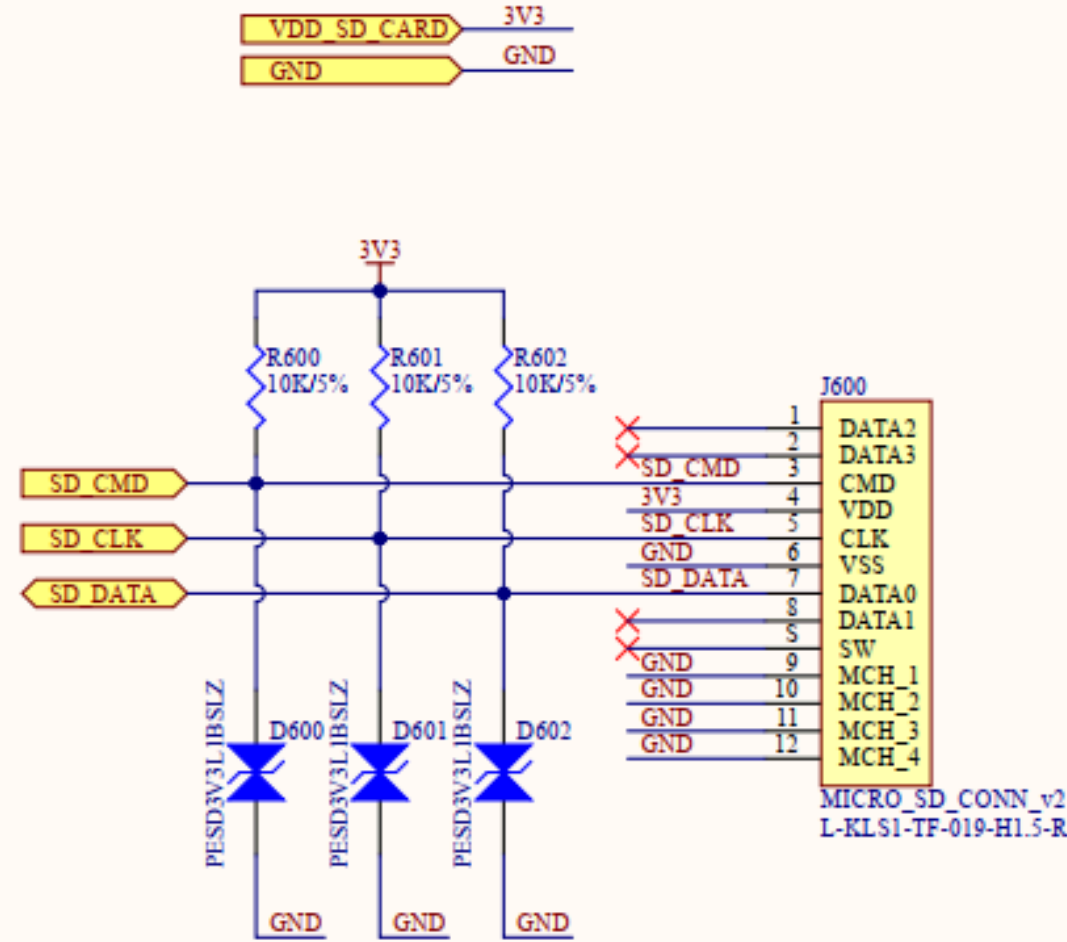

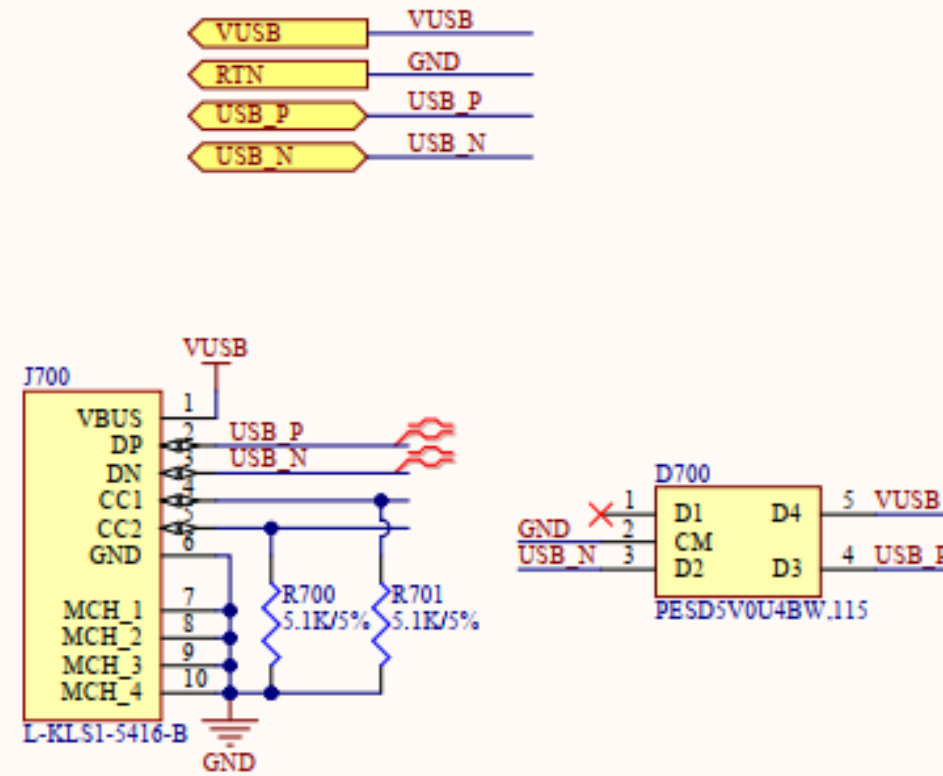

1

2

3


4

A

B

C

D



CMP800



L-KLS1-XL1-2.00-02-H

CMP801



L-KLS1-XL1-2.00-T

CMP802





L-KLS1-XL1-2.00-T

BT800



LIPO-3.7V

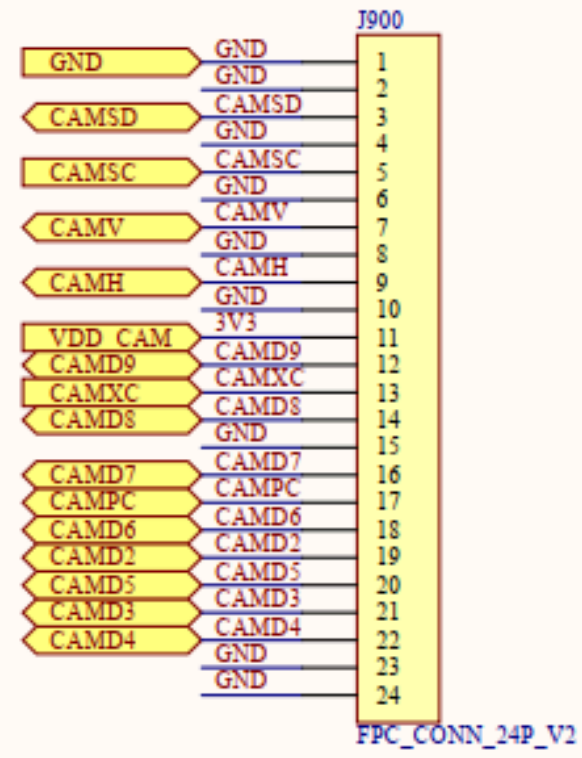

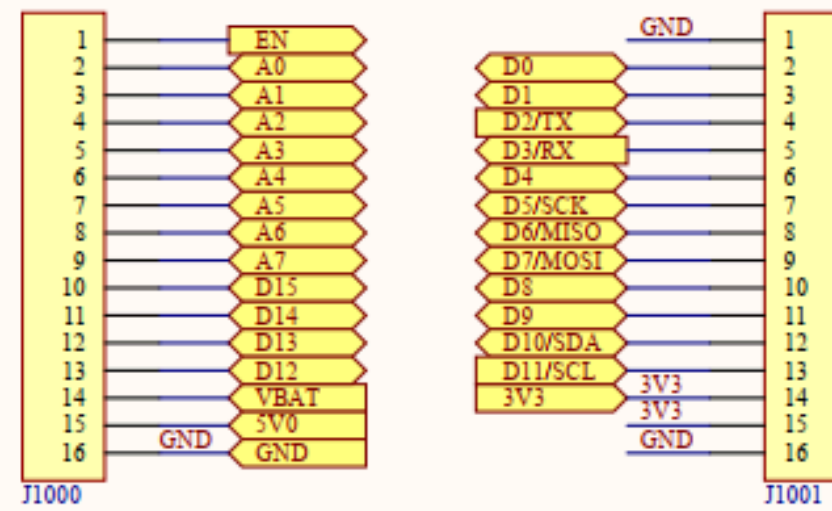

Deneyap Kart v2
10_Pin Header



1

2

3

4

A


B

C

D



J1100



CMP1100



L-KLS1-XF1-1.00-1-04-H

CMP1101



L-KLS1-XF1-1.00-T

CMP1102



L-KLS1-XF1-1.00-T

CMP1103



L-KLS1-XF1-1.00-T

CMP1104



L-KLS1-XF1-1.00-T

Deneyap Kart v2
I1_I2C Haberleşme Konnektörü



1

2

3

4