




**DG126-5.0**

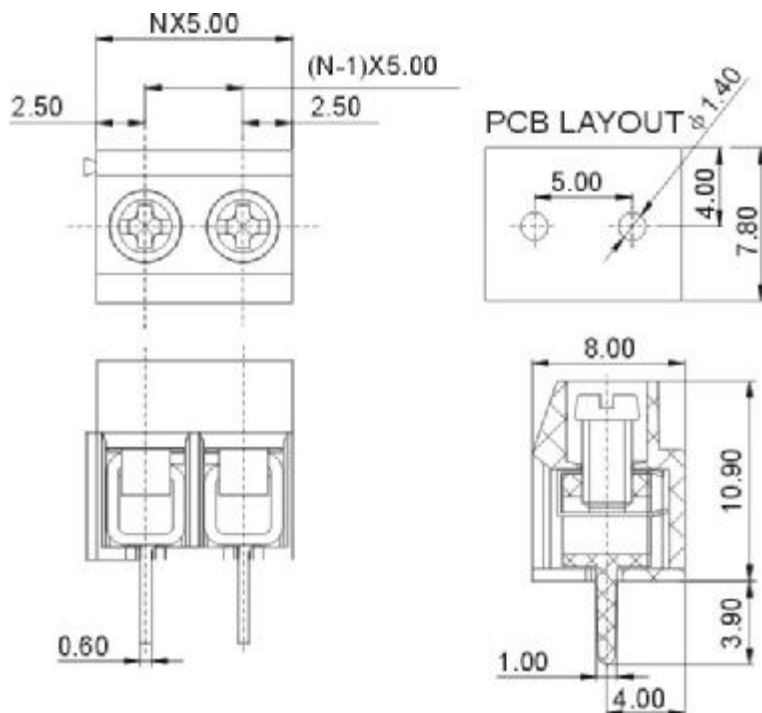

APPROVAL	 	
Electrical		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	10A	18A
Wire range	26-14AWG	0.5-2.5mm <sup>2</sup>
Withstanding voltage	AC2000V/1Min	

Mechanical		
torque	0.4Nm(3.5Lb-In)	
Ambient temperature	-40℃~+105℃	
Strip length	6-7mm	
Dimensions		
pitch	5.0mm(.197")	
Poles	2P,3P-24P	

Material		
Housing	PA66,UL94V-0	
Screws	M2.5,steel, Cr <sup>3+</sup> Znplated	
Pin header	Brass,Tin plated	
Wire guard	Stainless steel	

### HOW TO ORDER :

	-		P	-	1	-	X	X	X
							Customer Request		

Series number      No. of pole

1	Single pitch
2	Double pitch

Color

1	Grey	4	Green	7	Trans Parent
2	Blue	5	Orange	8	Yellow
3	Black	6	Red	9	White

	 <b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG126-5.0</b>