






**Model :** 2481BB  
**Size :** 0.28-inch  
**Emitting color :** Blue  
**Mode :** Common-Anode (CA)  
**Digit :** 4-Digit  
**Category :** LED 7-Segment Display  
**Maker :** XLITX Technology

**Prices :** \$1.02 = 100 Pieces    \$0.71 = 500 Pieces    \$0.68 = 1000 Pieces    (Free shipping)

### *Type-I*


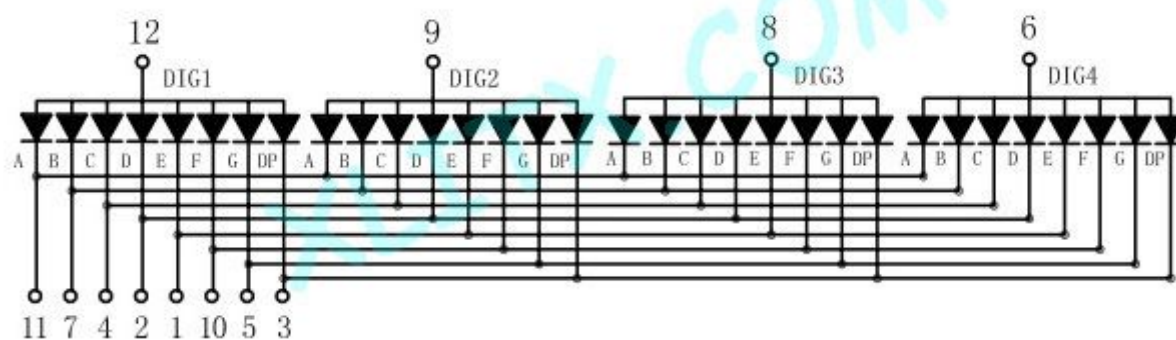


### *Type-II*

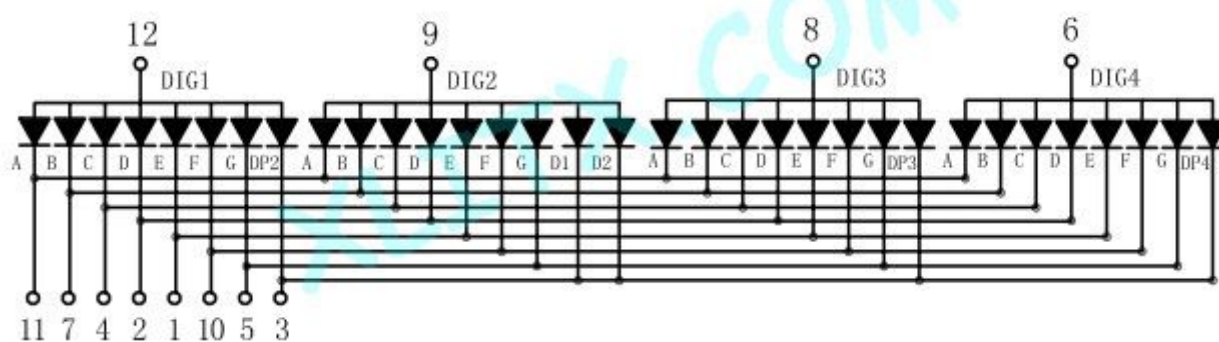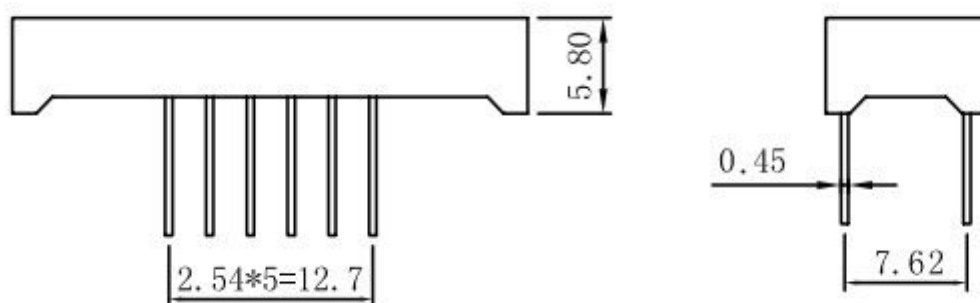

Dimension & Diagram

*Type-III*

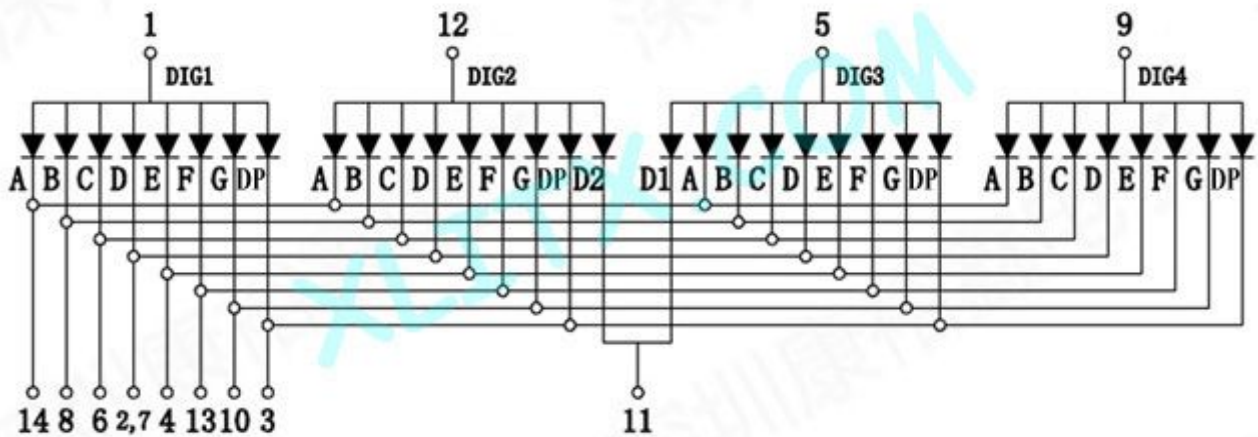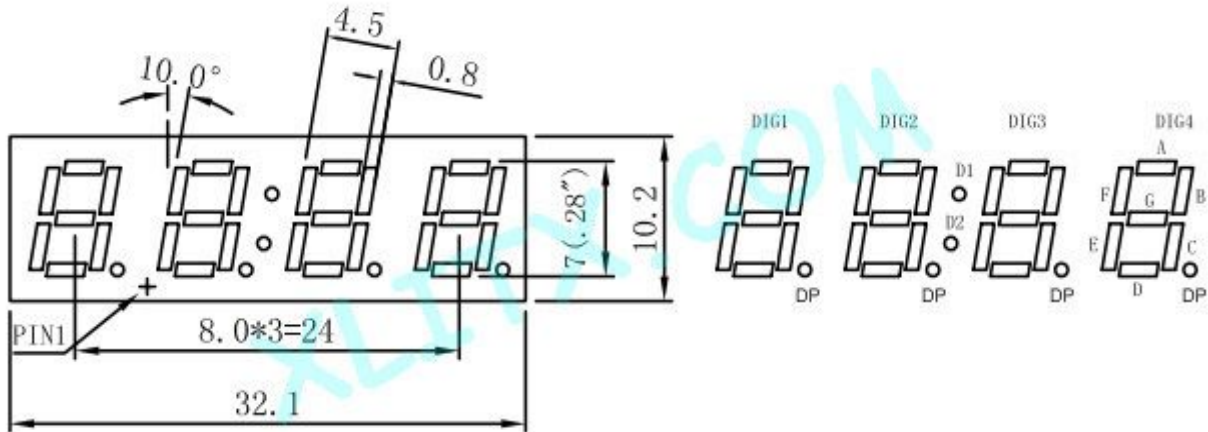

## Blue Electro-Optical Parameter

### 1. Electro-Optical Characteristics(Ta=25℃)

PARAMETER	SYMBOL	DEVICES ( Blue )		UNIT	TEST CONDIONS
		TYP	MAX		
Peak Emission Wavelengrth	$\lambda_p$	470		nm	IF=10mA
Forward Voltage	VF	3.5		V	IF=10mA
Reverse Current	IR		50	$\mu$ A	VR=5V
Segment To Segment (Dot To Dot) Luminonous Intensity Ratio	IV-M	1.5:1			IF=20

### 2. Absolute Maximun Ratings(Ta=25℃)

PARAMETER	SYMBOL	DEVICES ( Blue )	UNIT
Power Dissipation Per Dice	pad	70	mw
Derating Linear From 25℃ Per Dice		0.27	mA/℃
Continuous Forward Current Per Dice	Iaf	30	mA
Peak Forward Ourrent Per Dice (Duty Cycle 1/10,10KHz)	Ipf	100	mA
Reverse Voltage Per Dice	Vr	5	V
Operating Temperature	Topr	-20℃ (to) +75℃	
Storage Temperature	Tstg	-20℃ (to) +85℃	
Solder Temperature		1.6 Inch Below Seating Place for 5 seconds at 230℃	

### 3. Electro-Optical Curve

