

**Key Features & Benefits:**

- Selectable CCT and Wattage
- Strong Spring Clips Secure Fixture to Drywall, Ceiling Tiles, or Mounting Plate
- Multiple Color Trim Ring Accessories
- Wet Location Rated
- Energy Star Listed
- Cast Aluminum Housing and Trim

Project:

Date:

Catalog #:

Notes:




**Product Specifications:**

Selectable Wattage: 9W–12W–19W  
 Selectable Kelvin:  
 3000K–3500K–4000K–5000K  
 Lumens: 900–1,200–2,000 Lumens  
 Efficacy: Up to 105 lm/W  
 CRI: 90+  
 Input Voltage: 110–277 VAC  
 Power Factor: >0.98  
 Input Frequency: 50/60Hz  
 Operating Temperature: -4°F to 104°F  
 Operational Lifetime: 50,000 Hrs  
 Dimming: 1–10V  
 Product Weight (lbs) 1.06

**Dimensions:**

Fixture (ØxH): Ø7.38"x 4.0"  
 Flexible Metal Conduit (MC) Length: 24"  
 Wire Leads Length: 8.25"

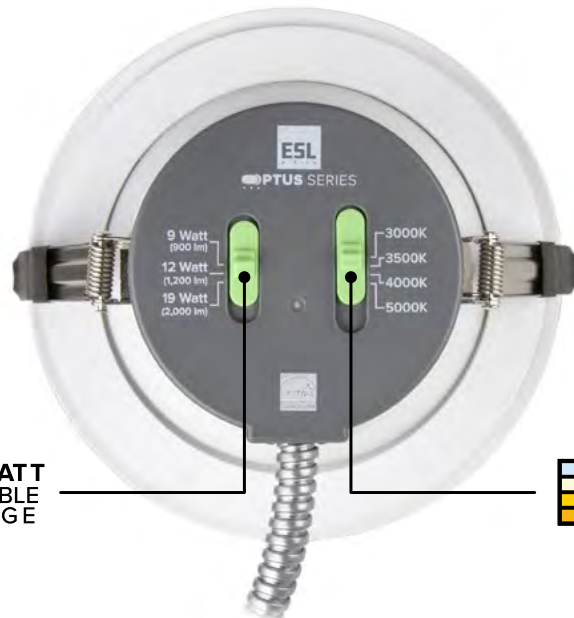

**MULTIWATT  
SELECTABLE  
WATTAGE**

**4CCT  
SELECTABLE  
KELVIN**



**Ordering Guide:**

ESL	-	TYPE	-	SIZE	-	SELECTABLE WATTAGE	-	GENERATION	-	SELECTABLE KELVIN	-	OPTIONS
ESL	-	OPT	-	6	-	0919W	-	2	-	3050K	-	
		(OPT) Optus Series		(6) Round 6"		(0919W) 9W–12W–19W		(2) 2nd Generation		(3050K) 3000K–3500K–4000K–5000K		

**FACTORY INSTALLED OPTIONS**

EM8	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery. (SL6)
-----	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**FIELD INSTALLED ACCESSORIES**

ESL-EMG-SL6-CSC-8W	Emergency backup battery unit, auto test function, 8-watt output, 90-minute minimum, 100–347 VAC input, 170 VDC output, closed frame with flex conduits, UL listed for factory or field install, Li-ion battery.
ESL-OPT2-4-Tff	4" OPTUS Field Installable Trim Kit
ESL-OPT2-6-Tff	6" OPTUS Field Installable Trim Kit
ESL-OPT2-8-Tff	8" OPTUS Field Installable Trim Kit
ESL-OPT2-10-Tff	10" OPTUS Field Installable Trim Kit
ESL-OPT2-4-RING	4" to 6" Goof Ring
ESL-OPT2-6-RING	6" to 8" Goof Ring
ESL-OPT2-8-RING	8" to 10" Goof Ring
ESL-OPT2-10-RING	10" to 12" Goof Ring
ESL-RDL-4-RKIT-001	4" New Construction Downlight Rough-In plate
ESL-RDL-6-RKIT-001	6" New Construction Downlight Rough-In plate
ESL-RDL-8-RKIT-001	8" New Construction Downlight Rough-In plate

Finishes: (ff)=(MW) Field Paintable, (BK) Black, (BN) Brushed Nickel, (BZ) Bronze, (CP) Copper

**AVAILABLE ACCESSORIES SOLD SEPARATELY**


Trim Ring  
Black



Trim Ring  
Bronze



Trim Ring  
Brushed Nickel



Trim Ring  
Copper



Trim Ring  
Field Paintable



Goof Ring


**Catalog Data:**

ITEM#	SELECTABLE WATTAGE	SELECTABLE KELVIN	MAX LUMEN OUTPUT	MAX EFFICACY (lm/W)	INPUT VOLTAGE	DIMENSIONS
<b>4"</b> ESL-OPT-4-0712W-23050K	7W–9W–12W	3000K–3500K–4000K–5000K	600–800–1,000	89	120–277 VAC	Ø5.51" x 3.65"
<b>6"</b> ESL-OPT-6-0919W-23050K	9W–12W–19W	3000K–3500K–4000K–5000K	900–1,200–2,000	105	120–277 VAC	Ø7.38" x 4.0"
<b>8"</b> ESL-OPT-8-1129W-23050K	11W–19W–29W	3000K–3500K–4000K–5000K	1,200–2,000–3,000	105	120–277 VAC	Ø9.44" x 4.38"
<b>10"</b> ESL-OPT-10-1836W-23050K	18W–27W–36W	3000K–3500K–4000K–5000K	2,000–3,000–4,000	111	120–277 VAC	Ø11.25" x 4.38"




**Dimensions:**


**4" Fixture**

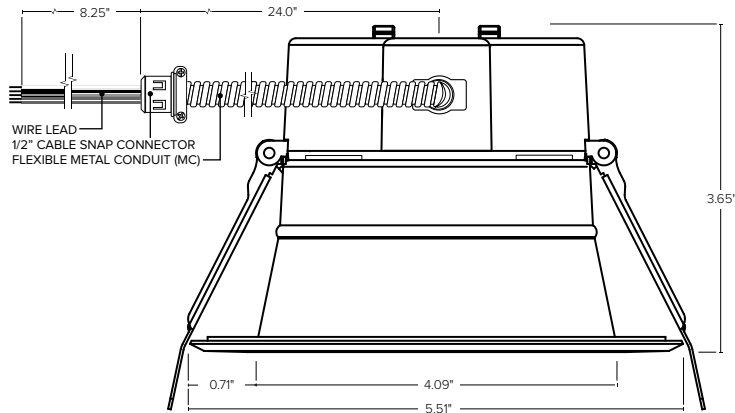


**6" Fixture**

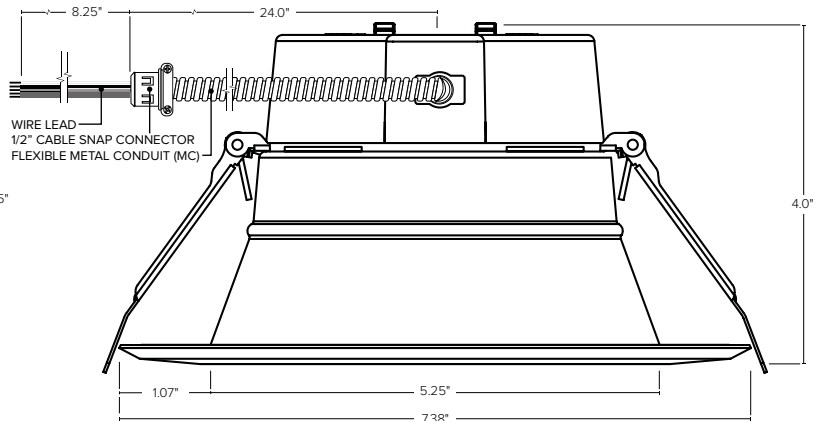

**8" Fixture**

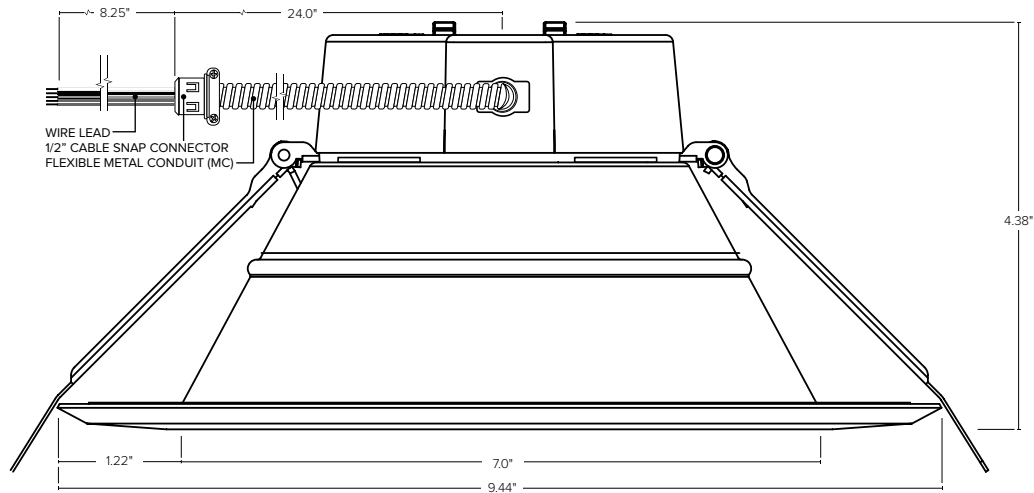


**10" Fixture**

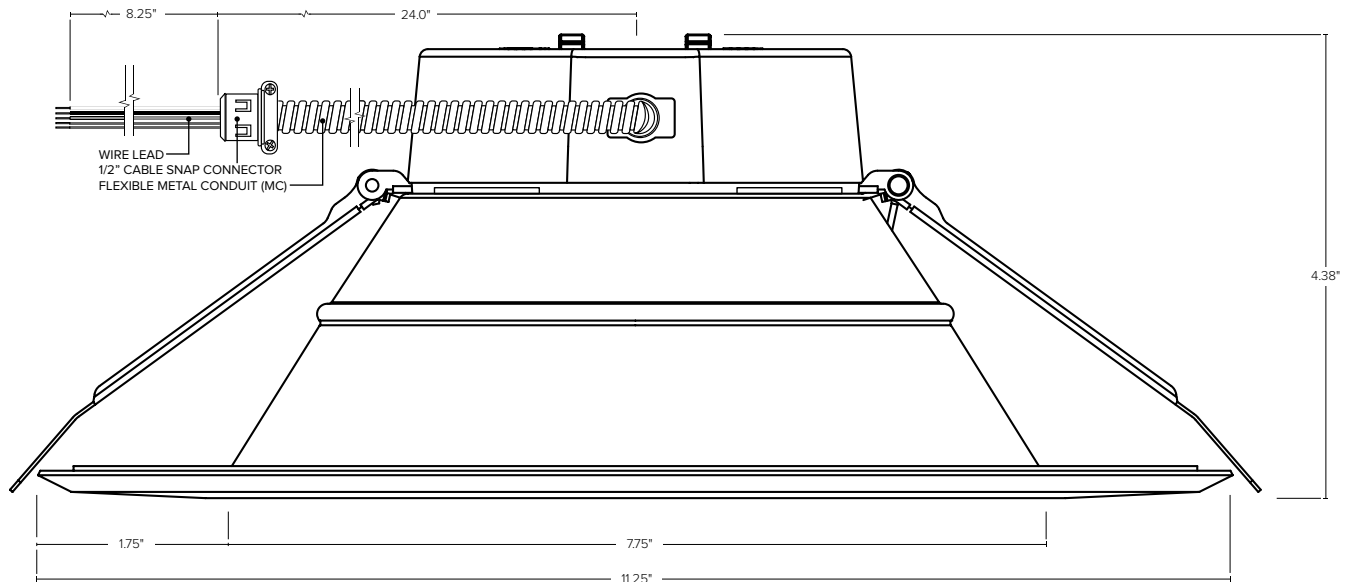


**Rough-In Plate Dimensions:**

**4" Plate**

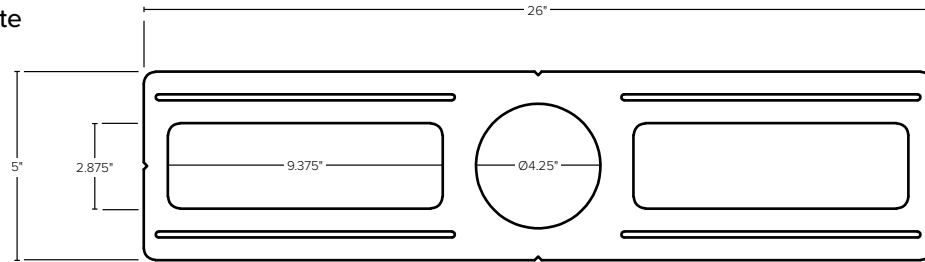

**6" Plate**

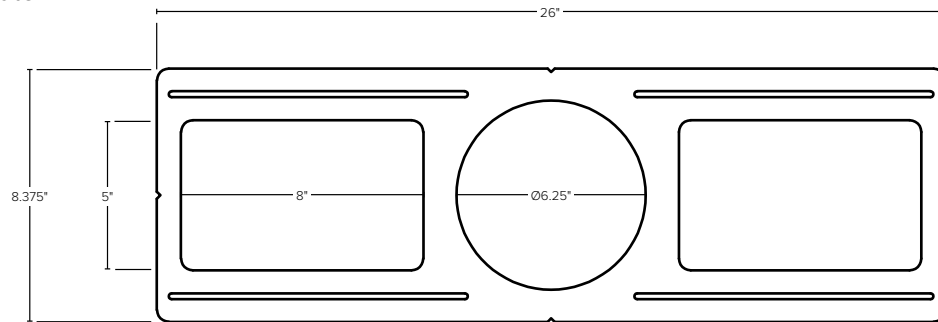

**8" Plate**

